

# Product data sheet

Specifications



single phase power supply,  
100...240V input, 24V DC output,  
156W, 6,5A

ABL2REM24065K

**Product availability: Non-Stock - Not normally stocked in distribution facility**

## Main

Range of Product	Easy Modicon ABL2
Product or Component Type	Power supply
Power supply type	Regulated switch mode
Rated power in W	156 W
Main Input Voltage	100...120 V AC single phase 200...240 V
Output voltage	24 V DC
Power supply output current	6.5 A
Operating position	Any position
Vibration resistance	4 gn (f= 10...500 Hz) conforming to IEC 61131-2
Name of test	Electromagnetic hypersensitivity (EHS) conforming to IEC 61000-6-2 level A

## Complementary

Input voltage limits	176...264 V 88...132 V
Network Frequency	47...63 Hz
Inrush current	60 A at 100...120 V AC 60 A at 200...240 V AC
Cos phi	0.45
Efficiency	89 %
Power dissipation in W	19.3 W
Current consumption	1.5 A at 240 V
Input protection type	Integrated fuse (not interchangeable)
Output voltage limits	20.4...27.6 V
Line and load regulation	+/- 1 %
Holding time	>= 35 ms at 115 V
Output protection type	Against overload, protection technology: 1.1...1.5 x In Against short-circuits, protection technology: 1.1...1.5 x In Against overvoltage, protection technology: 28.8...33.6 V Thermal
Connections - terminals	For ground connection: screw type terminals, connection capacity: 1 x 4 mm <sup>2</sup> AWG 12
Marking	CE
Electromagnetic compatibility	Immunity to electromagnetic interference conforming to EN 55022 Class B

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>Mounting Support</b>	DIN rail with accessory Panel mounting with accessory
<b>Operating altitude</b>	5000 m
<b>Output coupling</b>	Series
<b>Overvoltage category</b>	II
<b>Meantime between failure [MTBF]</b>	600000 h at 77 °F (25 °C)
<b>Status LED</b>	1 LED (Green) output voltage
<b>Width</b>	6.3 in (159 mm)
<b>Height</b>	3.8 in (97 mm)
<b>Depth</b>	1.2 in (30 mm)
<b>Net Weight</b>	0.97 lb(US) (0.44 kg)

## Environment

<b>Product Certifications</b>	EAC IC RoHS KC RCM
<b>IP degree of protection</b>	IP20 conforming to IEC 62368-1
<b>Ambient air temperature for operation</b>	-22...158 °F (-30...70 °C) (with power derating of 2 % per °C)
<b>Ambient Air Temperature for Storage</b>	-40...185 °F (-40...85 °C)
<b>Relative humidity</b>	10...95 %
<b>Overvoltage category</b>	Class I conforming to IEC 62368-1
<b>Pollution degree</b>	2
<b>Dielectric strength</b>	2000 V between input and ground

## Ordering and shipping details

<b>Category</b>	US1CP4B22153
<b>Discount Schedule</b>	CP4B
<b>GTIN</b>	3606481277459
<b>Returnability</b>	No
<b>Country of origin</b>	CN

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Nbr. of units in pkg.</b>	1
<b>Package 1 Height</b>	1.413 in (3.589 cm)
<b>Package 1 Width</b>	4.07 in (10.33 cm)
<b>Package 1 Length</b>	6.561 in (16.664 cm)
<b>Package weight(Lbs)</b>	15.5 oz (440.0 g)
<b>Unit Type of Package 2</b>	S03
<b>Number of Units in Package 2</b>	35
<b>Package 2 Height</b>	11.8 in (30.0 cm)
<b>Package 2 Width</b>	11.8 in (30.0 cm)

---

<b>Package 2 Length</b>	15.7 in (40.0 cm)
-------------------------	-------------------

---

<b>Package 2 Weight</b>	36.31 lb(US) (16.47 kg)
-------------------------	-------------------------

## **Contractual warranty**

---

<b>Warranty (in months)</b>	18
-----------------------------	----



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Use Better

Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
<a href="#">EU RoHS Directive</a>	Pro-active compliance (Product out of EU RoHS legal scope)
REACH Regulation	<a href="#">REACH Declaration</a>
California proposition 65	<b>WARNING:</b> This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>

### Use Longer

Lifetime extension	
Repair	No



### Use Again

Repack and remanufacture	
Take-back	No

Dimensions Drawings

Dimensions Drawings

Mechanical Dimensions

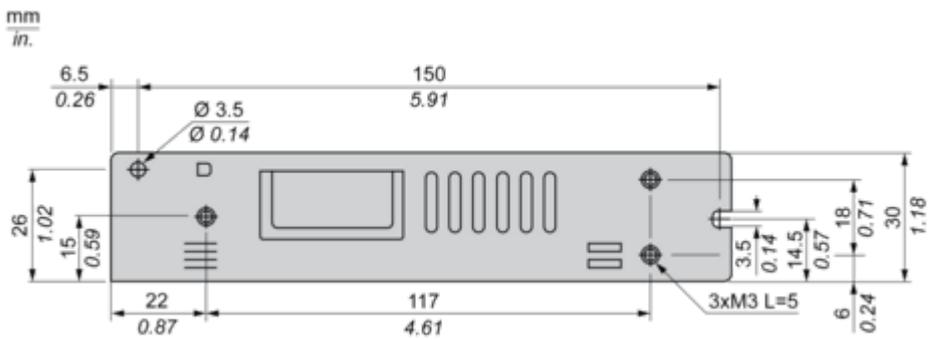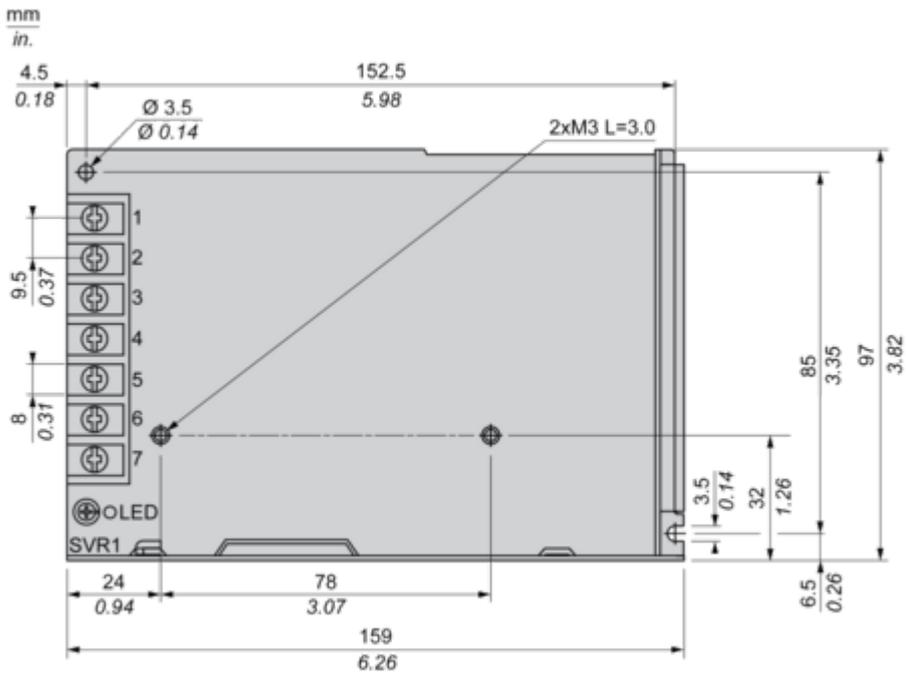


Mounting and Clearance

Mounting and Clearance

---


Vertical Mounting

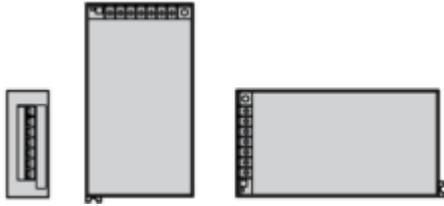

Horizontal Mounting



Clearance

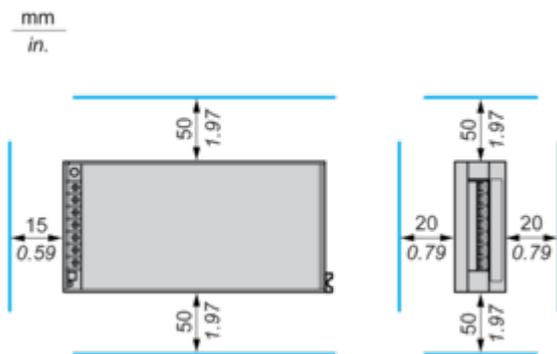


Performance Curves

Performance Curves


---

Static Characteristics

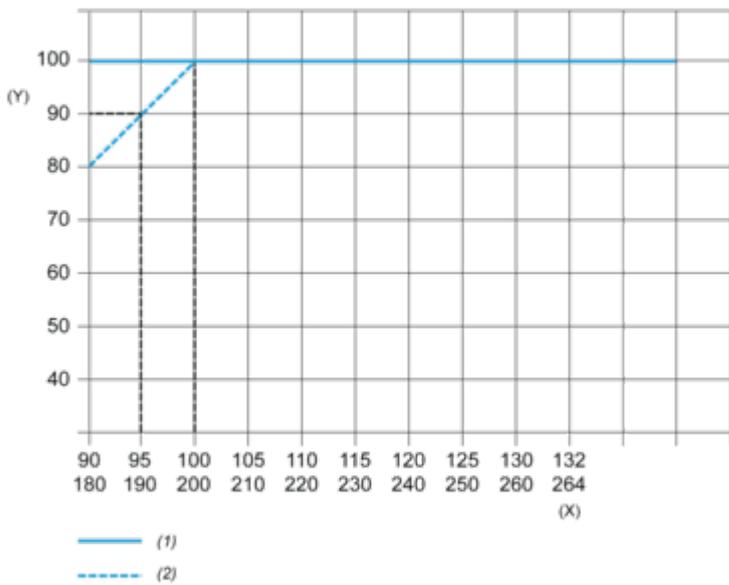

- (1) 180 - 264 VAC
- (2) 90 - 132 VAC
- (y) Load %
- (x) Input voltage (VAC) 50/60 Hz

Derating Curve

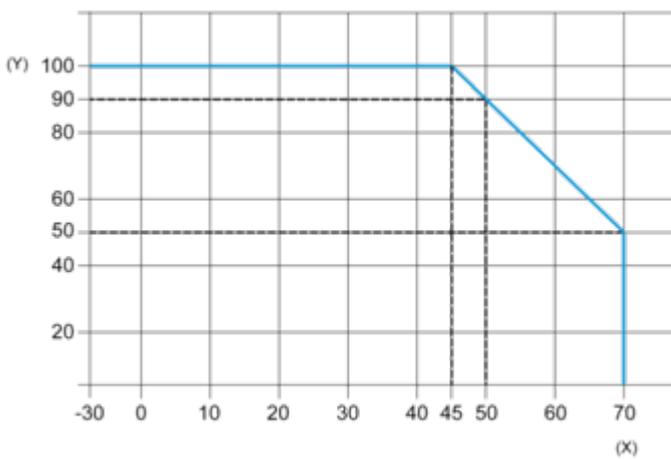

- (y) Load %
- (x) Ambient temperature (°C)