# Product End of Life Instructions

ATV630 CAB INT IP20/UL type 12 7.5KW 400V WO KEYPAD

## **Altivar Process**







ENVEOLI2007010\_V1 09/2020


# **Potential disassembly risks**



To service, remove all power.
- Wait 15 minutes
- Verify no voltage is present.

Failure to comply will result in death or serious injury

# **End of Life Instructions**

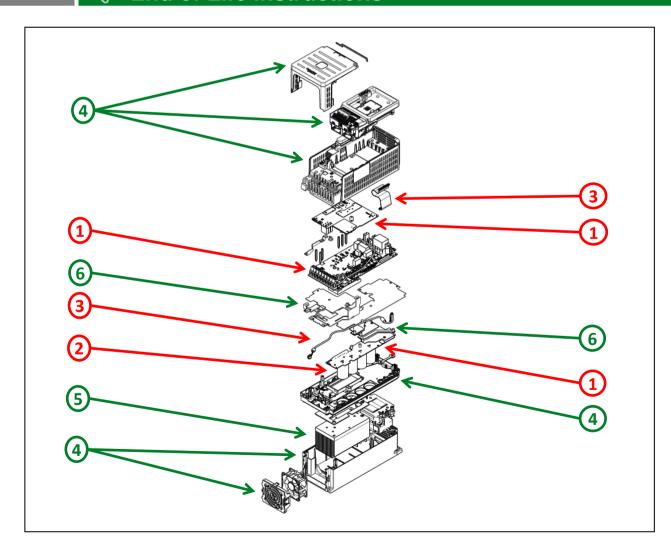

ENVEOLI2007010\_V1 09/2020

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	3	Cable (high current)	203	
To be depolluted	1	Electronic Board (Power) > 10cm <sup>2</sup>	1056	
To be depolluted	1	Electronic Board (Communication) > 10cm <sup>2</sup>	178	
To be depolluted	2	Electrolyte capacitors which size: height > 25 mm, diameter > 25 mm or proportionately similar volume	350	
To be dismantled	4	Polymer	1771	chassis, houssing
To be dismantled	5	Aluminium	1212	heatsink
To be dismantled	6	Steel	166	bar
Other			2559	



## **Product description**

Manufacturer identification	Schneider Electric Industries SAS	
Brand name	Schneider Electric	
Product function	The main function of the Altivar Process product range is the speed control and variation of a synchronous, asynchronous or reluctance electric motor for fluid management and industrial applications.	
Product reference	ATV630U75N4ZU	
Total representative product mass	7500 g	
Representative product dimensions	345mm x 155mm x 225mm	
Accessories	No accessories needed.	
Date of information release	09/2020	

## **Additional information**

#### Legal information

This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.

### In case of special transportation: transportation method

No special tranportation.

#### Recyclability potential

69%

Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS Country Customer Care Center http://www.schneider-electric.com/contact

35 rue Joseph Monier

CS 30323

FR 92500 Rueil Malmaison RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

ENVEOLI2007010\_V1

Published by Schneider Electric

© 2020 - Schneider Electric - All rights reserved