


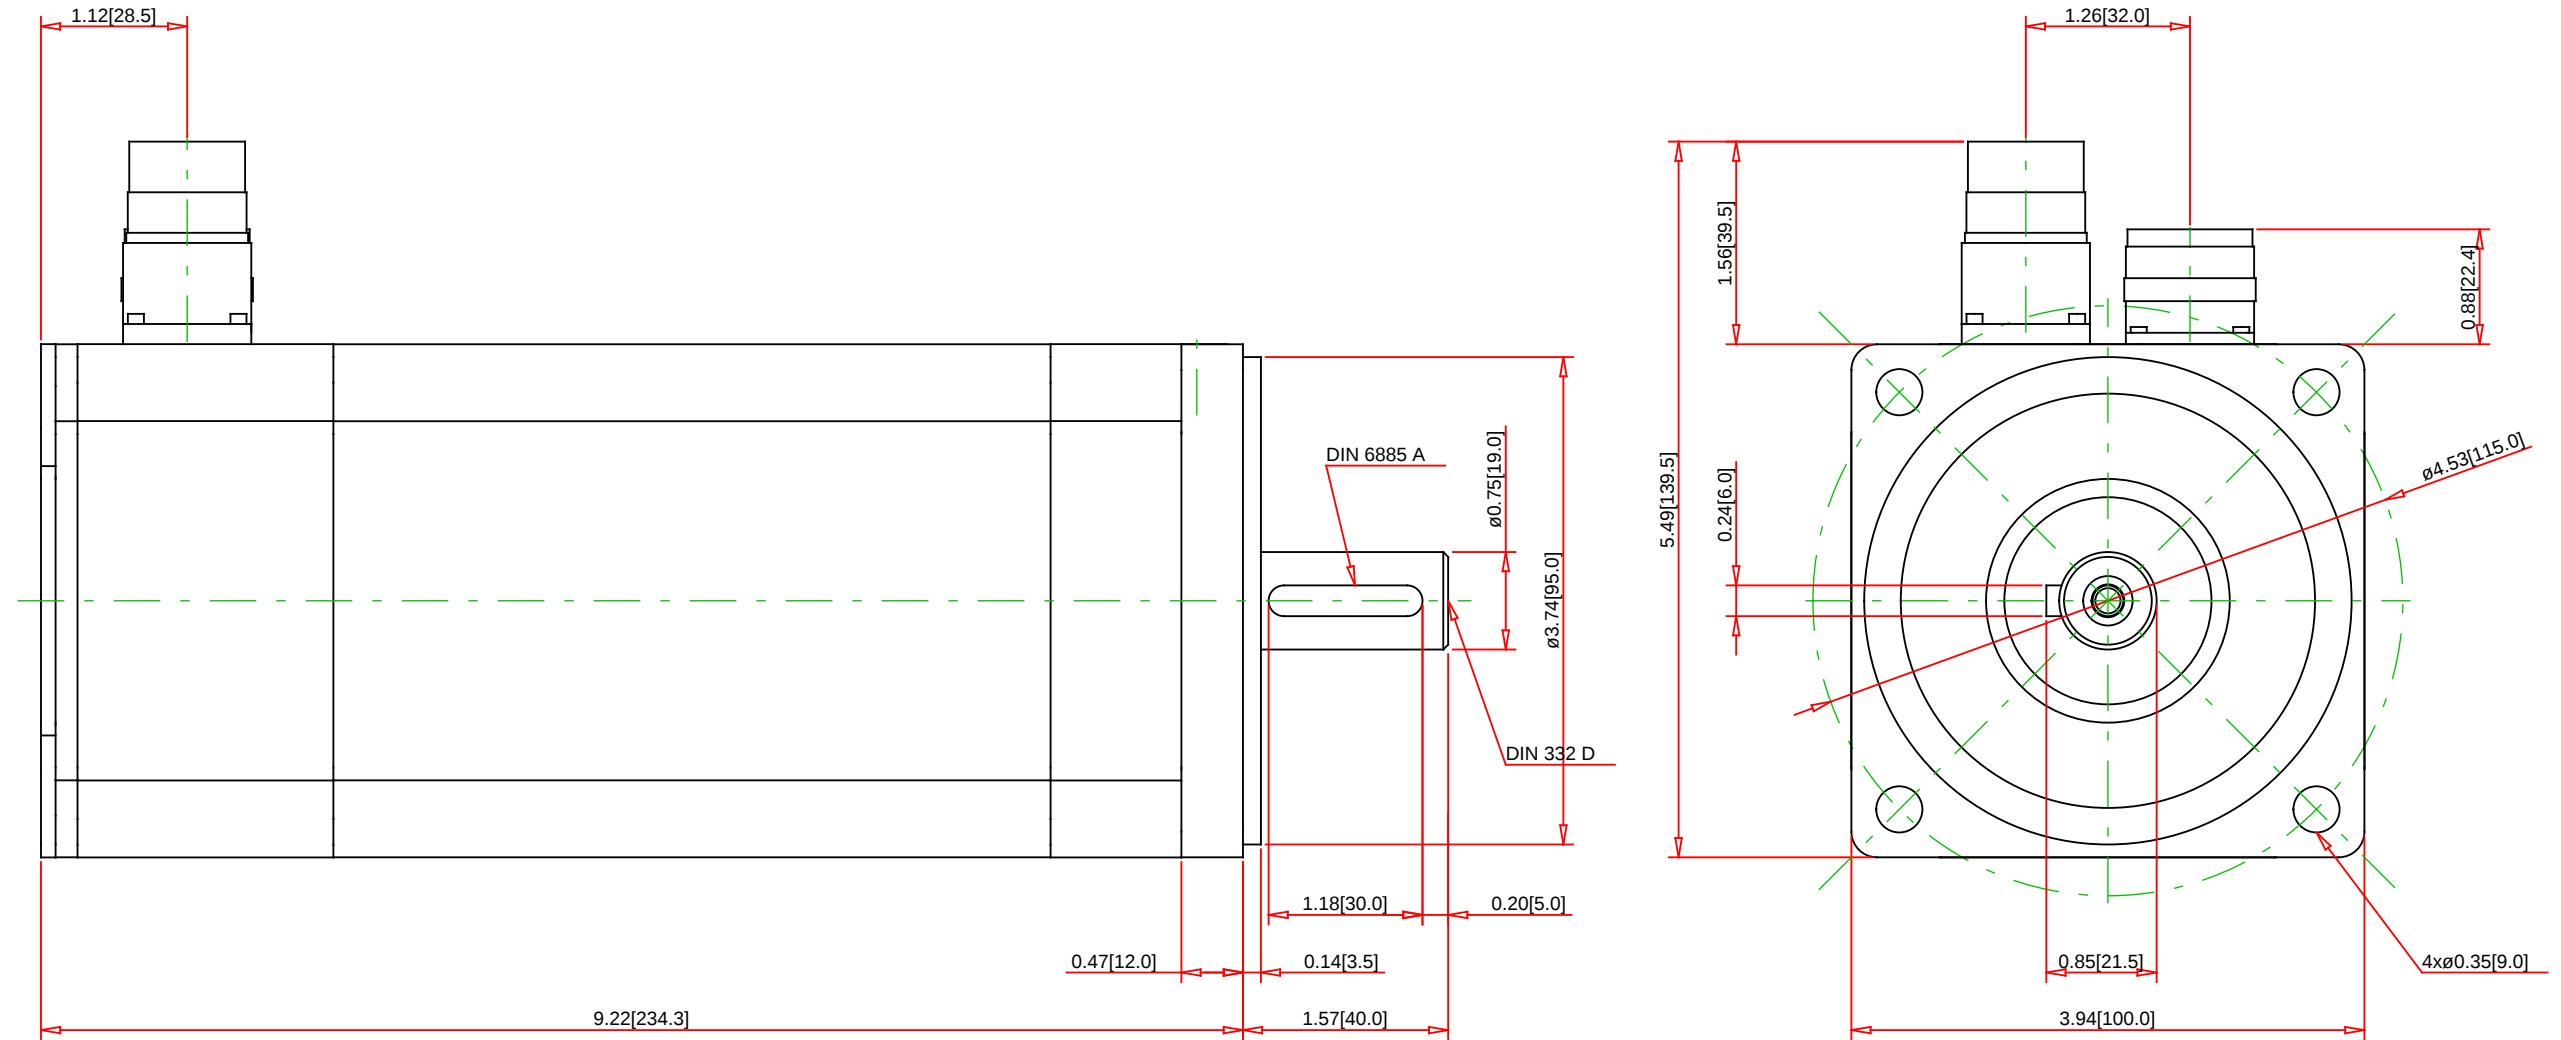

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
BMH1003P06F2A

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 877 342 5173
Email: CCC@us.schneider-electric.com

Technical Information:	
Frame Size (mm):	100
Degree of Protection (Shaft / housing):	IP54 / IP65
Maximum Current (Arms):	26.71
Holding brake:	Yes
Encoder Type:	ABS Single turn 16 Sin/Cos period
Torque Constant (Nm/A)	1.17
CSA:	Yes
RoHS:	Yes
Weight without brake (kg / lb):	14.33 / 6.5

Specification:	
Description:	
Family:	BMH
Maximum Permissible Speed (rpm):	6000
Continuous Stall Torque (Nm / lbs-in):	9.0 / 796.6
Peak Torque (Nm / lbs-in):	27 / 239