


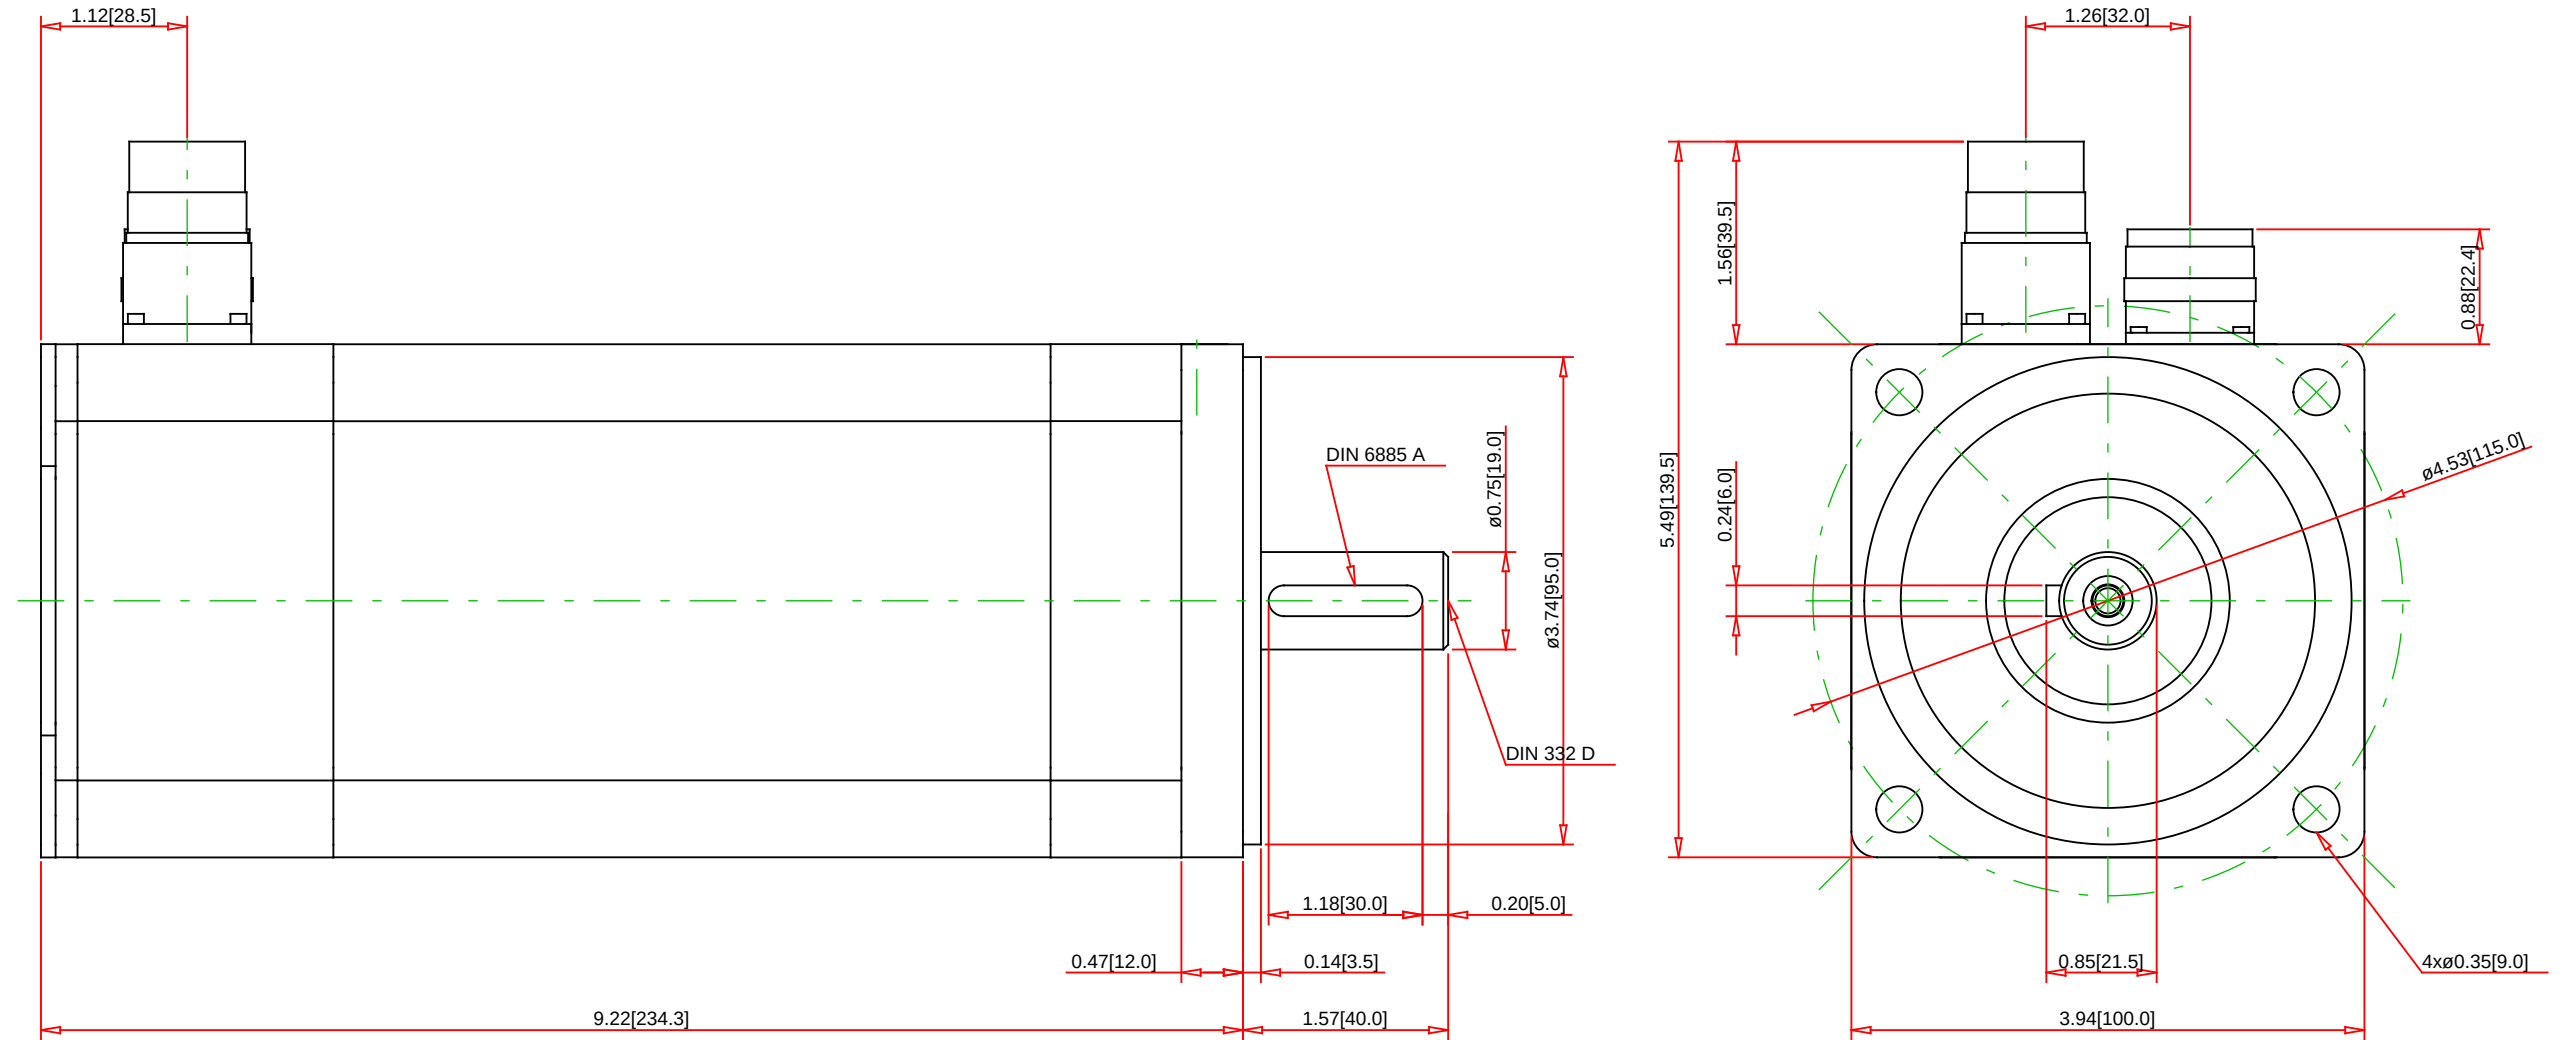

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
BMH1003P32F2A

Schneider Electric
Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 877 342 5173
Email: CCC@us.schneider-electric.com

Technical Information:

Frame Size (mm): 100
Degree of Protection (Shaft / housing): IP65 / I P65
Maximum Current (Arms): 26.71
Holding brake: Yes
Encoder Type: ABS Multi turn 128 Sin/Cos period
Torque Constant (Nm/A): 1.17
CSA: Yes
RoHS: Yes
Weight without brake (kg / lb): 14.33 / 6.5

Description:
Family: BMH
Maximum Permissible Speed (rpm): 6000
Continuous Stall Torque (Nm / lbs-in): 9.0 / 796.6
Peak Torque (Nm / lbs-in): 27 / 239

Specification: