

Product data sheet

Specifications



encoder interface module, Modicon X80, SSI, 3 channels, up to 31 databits, 1Mbauds

BMXEAE0300

Main

Range of product	Modicon X80
Product or component type	Encoder interface module
Function available	Offset Compare Modulo Reduction Capture
Number of channels	3 SSI channel
Number of outputs	1 24 V DC reflex digital output for each SSI channel
Number of inputs	2 24 V DC capture digital inputs for the 3 SSI channels

Complementary

Data format	8...31 bits
Transmission rate	500 kbauds 200 kbauds 1 Mbauds 100 kbauds
Refresh time	1 ms
Input compatibility	24 V DC SSI absolute encoder (voltage limits: 19.2...30 V) for 200 mA per channel
Dielectric strength	1400 V DC 60 s
[Us] rated supply voltage	19.2...30 V DC, <30 mA 24 V DC, <30 mA (typical)
Protection type	Overvoltage protection DC
Current consumption	150 mA at 3.3 V DC for back plane, (typical) 250 mA at 3.3 V DC for back plane, (maximum)
Net weight	0.138 kg

Environment

Ambient air temperature for operation	0...60 °C
Operating altitude	0...4000 m
IP degree of protection	IP20
Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility
Product certifications	CE RCM CSA EAC Merchant Navy UL

Standards	EN/IEC 61010-2-201 EN/IEC 61131-2 UL 61010-2-201 CSA C22.2 No 61010-2-201
------------------	--

Packing Units

Unit Type of Package 1	PCE
-------------------------------	-----

Number of Units in Package 1	1
-------------------------------------	---

Package 1 Height	5.500 cm
-------------------------	----------

Package 1 Width	11.000 cm
------------------------	-----------

Package 1 Length	11.500 cm
-------------------------	-----------

Package 1 Weight	167.000 g
-------------------------	-----------

Unit Type of Package 2	S02
-------------------------------	-----

Number of Units in Package 2	15
-------------------------------------	----

Package 2 Height	15.000 cm
-------------------------	-----------

Package 2 Width	30.000 cm
------------------------	-----------

Package 2 Length	40.000 cm
-------------------------	-----------

Package 2 Weight	2.800 kg
-------------------------	----------

Contractual warranty

Warranty	18 months
-----------------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Total lifecycle Carbon footprint 48

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic Yes

[EU RoHS Directive](#) Pro-active compliance (Product out of EU RoHS legal scope)

REACH Regulation [REACH Declaration](#)

California proposition 65 **WARNING:** This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

Repack and remanufacture

End of life manual availability [End of Life Information](#)

Take-back No

Dimensions Drawings

Modules Mounted on Racks

Dimensions



(1) With removable terminal block (cage, screw or spring).

(2) With FCN connector.

(3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81

Connections and Schema

Wiring Diagram

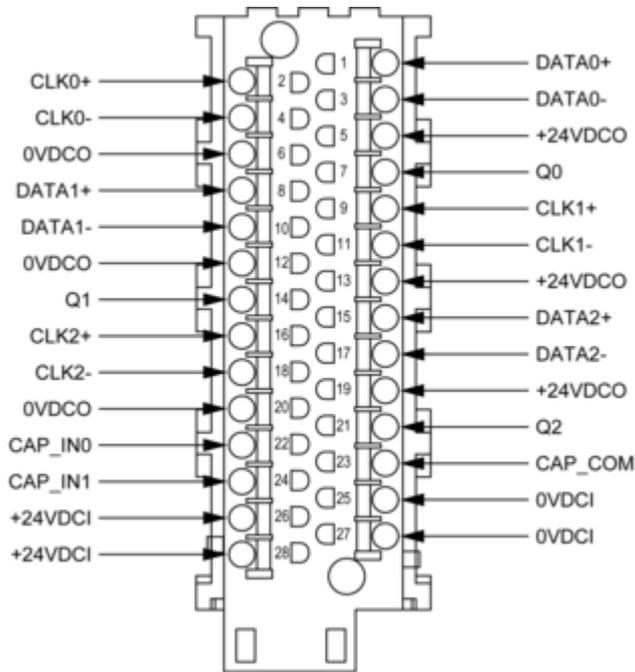


Image of product / Alternate images

Alternative





