

# Product data sheet

Specifications



processor, Modicon M340, max  
1024 discrete, 256 analog IO,  
CANopen, Ethernet

BMXP3420302

**Product availability: Stock - Normally stocked in distribution facility**

## Main

<b>Range of Product</b>	Modicon M340 automation platform
<b>Product or Component Type</b>	Processor module
<b>Concept</b>	CANopen Transparent Ready
<b>Number of racks</b>	4
<b>Number of slots</b>	11
<b>Discrete I/O processor capacity</b>	1024 I/O multi-rack configuration 704 I/O single-rack configuration
<b>Analogue I/O processor capacity</b>	256 I/O multi-rack configuration 66 I/O single-rack configuration
<b>Number of application specific channel</b>	36

## Complementary

<b>Control channels</b>	Programmable loops
<b>Motion control</b>	Independent axis CANopen
<b>Integrated connection type</b>	USB port 12 Mbit/s CANopen master bus SUB-D 9 2 twisted shielded pairs 20 kbit/s...1 Mbit/s Ethernet TCP/IP RJ45 1 twisted pair 10/100 Mbit/s
<b>Communication module processor capacity</b>	2 Ethernet communication module 4 AS-Interface module
<b>embedded communication service</b>	Network management (NMT) CANopen Process Data Object (PDO) CANopen Service Data Object (SDO) CANopen Special functions (SYNC, EMCY, TIME) CANopen Bandwidth management, Ethernet TCP/IP Data Editor, Ethernet TCP/IP Modbus TCP messaging, Ethernet TCP/IP Rack Viewer, Ethernet TCP/IP SNMP network administrator, Ethernet TCP/IP
<b>Port Ethernet</b>	10BASE-T/100BASE-TX
<b>Transmission rate</b>	1 Mbit/s 0...65.6 ft (0...20 m) 0...2.0 ft (0...0.6 m) 125 kbit/s 0...1640.4 ft (0...500 m) 0...32.8 ft (0...10 m) 20 kbit/s 0...8202.10 ft (0...2500 m) 0...984.3 ft (0...300 m) 250 kbit/s 0...820.2 ft (0...250 m) 0...32.8 ft (0...10 m) 50 kbit/s 0...3280.8 ft (0...1000 m) 0...393.7 ft (0...120 m) 500 kbit/s 0...328.08 ft (0...100 m) 0...32.8 ft (0...10 m) 800 kbit/s 0...131.2 ft (0...40 m) 0...19.7 ft (0...6 m)
<b>Bus type</b>	CANopen M20 DS 301 V4.02 devices linked by daisy-chaining or tap junctions CSMA/CA CANopen M20 DS 303-2 devices linked by daisy-chaining or tap junctions CSMA/CA CANopen M20 DS 405 devices linked by daisy-chaining or tap junctions CSMA/CA
<b>Number of server device(s)</b>	63 CANopen

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>Number of devices per segment</b>	0...16 672.6 ft (205 m) CANopen 0...32 607.0 ft (185 m) CANopen 0...64 524.9 ft (160 m) CANopen
<b>Memory description</b>	Supplied memory card (BMXRMS008MP) backup of programs, constants, symbols and data Internal RAM 4096 kB Internal RAM 256 kB data Internal RAM 3584 kB program constants and symbols Supplied memory card (BMXRMS008MP) activation of standard web server, class B10
<b>Maximum size of object areas</b>	256 kB unlocated internal data 32634 %Mi located internal bits
<b>Default size of object areas</b>	1024 %MWi internal words located internal data 256 %KWi constant words located internal data 512 %Mi located internal bits
<b>Application structure</b>	1 cyclic/periodic master task 1 periodic fast task No auxiliary task 64 event tasks
<b>Execution time per instruction</b>	0.12 µs Boolean 0.17 µs double-length words 0.25 µs single-length words 1.16 µs floating points
<b>Number of instructions per ms</b>	6.4 Kinst/ms 65 % Boolean + 35 % fixed arithmetic 8.1 Kinst/ms 100 % Boolean
<b>System overhead</b>	0.13 ms fast task 0.7 ms master task
<b>Current consumption</b>	135 mA 24 V DC
<b>Supply</b>	Internal power supply via rack
<b>Marking</b>	CE
<b>Status LED</b>	1 LED (Green) activity on Ethernet network (ETH ACT) 1 LED (Green) integrated machine/installation bus operational (CAN RUN) 1 LED (Green) processor running (RUN) 1 LED (Green) status of Ethernet network (ETH STS) 1 LED (Red) data rate (ETH 100) 1 LED (Red) I/O module fault (I/O) 1 LED (Red) integrated machine/installation bus fault (CAN ERR) 1 LED (Red) memory card fault (CARD ERR) 1 LED (Red) processor or system fault (ERR) 1 LED (Yellow) activity on Modbus (SER COM)
<b>Net Weight</b>	0.474 lb(US) (0.215 kg)

## Environment

<b>Ambient Air Temperature for Operation</b>	32...140 °F (0...60 °C)
<b>Relative Humidity</b>	10...95 % without condensation
<b>IP Degree of Protection</b>	IP20
<b>Protective treatment</b>	TC
<b>Directives</b>	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility
<b>Product certifications</b>	CE UL CSA RCM EAC Merchant Navy

<b>Standards</b>	EN 61131-2 EN/IEC 61010-2-201 UL 61010-2-201 CSA C22.2 No 61010-2-201 IACS E10 EN/IEC 61000-6-5, interface type 1 and type 2 EN/IEC 61850-3, location G
------------------	---

<b>Environmental characteristic</b>	Hazardous location class I division 2
-------------------------------------	---------------------------------------

## Ordering and shipping details

<b>Category</b>	US1PC3418160
<b>Discount Schedule</b>	PC34
<b>GTIN</b>	3595864024455
<b>Returnability</b>	Yes
<b>Country of origin</b>	FR

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Nbr. of units in pkg.</b>	1
<b>Package 1 Height</b>	2.165 in (5.500 cm)
<b>Package 1 Width</b>	4.331 in (11.000 cm)
<b>Package 1 Length</b>	4.606 in (11.700 cm)
<b>Package weight(Lbs)</b>	8.783 oz (249.000 g)
<b>Unit Type of Package 2</b>	S02
<b>Number of Units in Package 2</b>	15
<b>Package 2 Height</b>	5.906 in (15.000 cm)
<b>Package 2 Width</b>	11.811 in (30.000 cm)
<b>Package 2 Length</b>	15.748 in (40.000 cm)
<b>Package 2 Weight</b>	9.059 lb(US) (4.109 kg)

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

 <b>Environmental footprint</b>	
Carbon footprint (kg CO2 eq, Total Life cycle)	162
Environmental Disclosure	<a href="#">Product Environmental Profile</a>

### Use Better

 <b>Materials and Substances</b>	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
<a href="#">EU RoHS Directive</a>	Pro-active compliance (Product out of EU RoHS legal scope)
REACH Regulation	<a href="#">REACH Declaration</a>
California proposition 65	<b>WARNING:</b> This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>

### Use Again


 <b>Repack and remanufacture</b>	
Circularity Profile	<a href="#">End of Life Information</a>
Take-back	No

Dimensions Drawings

Modules Mounted on Racks

---

Dimensions

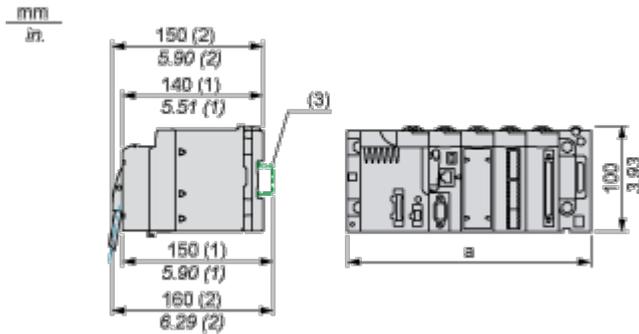

- (1) With removable terminal block (cage, screw or spring).
- (2) With FCN connector.
- (3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81

Image of product / Alternate images

Alternative

---





