

Product data sheet

Specifications



gearbox straight teeth GBX, Lexium,
60mm, reduction 4:1 , 10arc.min,
38N.m

GBX060004K

Main

Range compatibility	Lexium ILS Lexium 52 Lexium 62 ILM Lexium 32 Lexium ILA Lexium SD3 Lexium 62
Gear box type	Straight teeth
Product or component type	Planetary gearbox
Device short name	GBX
Product compatibility	BMH (70 mm, 1 motor stacks) BMH (70 mm, 2 motor stacks) BMH (70 mm, 3 motor stacks) BSH (55 mm, 1 motor stacks) BSH (55 mm, 2 motor stacks) BSH (55 mm, 3 motor stacks) BSH (70 mm, 1 motor stacks) BSH (70 mm, 2 motor stacks) BSH (70 mm, 3 motor stacks) BRS3 ILA (57 mm, 1 motor stacks) ILA (57 mm, 2 motor stacks) ILS (57 mm, 1 motor stacks) ILS (57 mm, 2 motor stacks) ILS (57 mm, 3 motor stacks) SH3 MH3 ILM
Gearbox external diameter	60 mm
Reduction ratio	4:1

Complementary

Maximum torsional backlash	10 arc.min
Torsional rigidity	2.3 N.m/arcmin
Housing colour	Black
Housing material	Black anodized aluminium
Shaft material	C 45
Additional information	Lubricated for life
Service life in hours	30000 h at 100 rpm at 30 °C
Mounting position	Any position
Efficiency	96.0 %
Maximum radial force Fr	340 N at 100 rpm, force applied at mid-distance from output shaft during 30000 hour at 30 °C

Maximum axial force Fa	450 N at 100 rpm, during 30000 hour at 30°C
moment of inertia	0.112 kg.cm ²
Continuous output torque	38 N.m at 100 rpm at 30 °C
Maximum output torque	61 N.m at 100 rpm at 30 °C
Net weight	0.9 kg
Input diameter	14.0 mm
No load running torque	0.05 N.m
Reduction ratio	4
Compatibility code	GBX
Internal length	39.0 mm

Environment

Noise level	58 dB at 1 m, no-load
IP degree of protection	Shaft output: IP54
ambient temperature for operation	-25...90 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6.8 cm
Package 1 Width	6.8 cm
Package 1 Length	13.5 cm
Package 1 Weight	825 g
Unit Type of Package 2	S03
Number of Units in Package 2	10
Package 2 Height	30 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	8.738 kg

Contractual warranty

Warranty	18 months
-----------------	-----------



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Total lifecycle Carbon footprint 1163

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard No

Packaging without single use plastic No

[EU RoHS Directive](#) Pro-active compliance (Product out of EU RoHS legal scope)

SCIP Number 7c9e597c-8ccc-4daf-95fb-5d67fc70d561

REACH Regulation [REACH Declaration](#)

California proposition 65 **WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

PVC free Yes

Use Again


Repack and remanufacture

End of life manual availability No need of specific recycling operations

Take-back No

Dimensions Drawings

Dimensions with Servo Motor Adaptation Kit

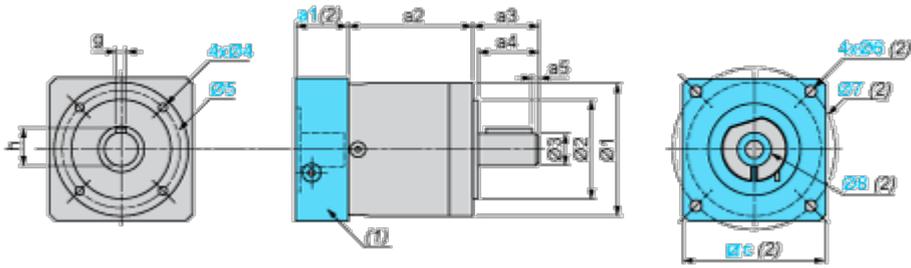

- (1) GBK adaptation kit
- (2) GBK adaptation kit related dimensions a1, c, Ø6, Ø7, Ø8 depend on the gearbox and servo motor combination
- Ø8 shaft end adaptor in case motor shaft diameter is smaller than gearbox input coupling diameter

Values in mm

a2	a3	a4	a5	h	g	Ø1	Ø2	Ø3	Ø4	Ø5
55	35	30	2.5	16	5	60	40 h7	14 h7	M5 x 8	52

Values in in.

a2	a3	a4	a5	h	g	Ø1	Ø2	Ø3	Ø4	Ø5
2.16	1.38	1.18	0.10	063	0.19	2.36	1.57 h7	0.55 h7	M5 x 0.31	2.05