

Product data sheet

Specifications



angular gearbox straight teeth GBY,
Lexium, 60mm, reduction 5:1,
16arc.min, 24N.m

GBY060005K

Main

Range compatibility	Lexium 62 Lexium ILS Lexium SD3 Lexium ILA Lexium 32 Lexium 62 ILM Lexium 52
Gear box type	Straight teeth
Product or component type	Angular planetary gearbox
Device short name	GBY
Product compatibility	BMH (70 mm, 1 motor stacks) BMH (70 mm, 2 motor stacks) BSH (55 mm, 1 motor stacks) BSH (55 mm, 2 motor stacks) BSH (55 mm, 3 motor stacks) BSH (70 mm, 1 motor stacks) BSH (70 mm, 2 motor stacks) BRS3 ILA (57 mm, 1 motor stacks) ILA (57 mm, 2 motor stacks) ILS (57 mm, 1 motor stacks) ILS (57 mm, 2 motor stacks) ILS (57 mm, 3 motor stacks) SH3 MH3 ILM
Gearbox external diameter	60 mm
Reduction ratio	5:1

Complementary

Maximum torsional backlash	16 arc.min
Torsional rigidity	2.3 N.m/arcmin
Housing colour	Black
Housing material	Black anodized aluminium
Shaft material	C 45
Additional information	Lubricated for life
Service life in hours	30000 h at 100 rpm at 30 °C
Mounting position	Any position
Efficiency	89.0 %
Maximum radial force Fr	340 N at 100 rpm, force applied at mid-distance from output shaft during 30000 hour at 30 °C
Maximum axial force Fa	450 N at 100 rpm, during 30000 hour at 30°C

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

moment of inertia	0.24 kg.cm²
Continuous output torque	24 N.m at 100 rpm at 30 °C
Maximum output torque	38 N.m at 100 rpm at 30 °C
Net weight	1.7 kg
Input diameter	14.0 mm
No load running torque	0.05 N.m
Reduction ratio	5
Compatibility code	GBY
Internal length	112.5 mm

Environment

Noise level	70 dB at 1 m, no-load
IP degree of protection	Shaft output: IP54
ambient temperature for operation	-25...90 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9.700 cm
Package 1 Width	8.000 cm
Package 1 Length	18.000 cm
Package 1 Weight	1.693 kg
Unit Type of Package 2	S03
Number of Units in Package 2	5
Package 2 Height	30.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	8.785 kg
Unit Type of Package 3	P12
Number of Units in Package 3	40
Package 3 Height	45.000 cm
Package 3 Width	80.000 cm
Package 3 Length	120.000 cm
Package 3 Weight	82.280 kg

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

 Environmental footprint	
Total lifecycle Carbon footprint	1166
Environmental Disclosure	Product Environmental Profile

Use Better


 Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	7c9e597c-8ccc-4daf-95fb-5d67fc70d561
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
PVC free	Yes

Use Again

 Repack and remanufacture	
End of life manual availability	No need of specific recycling operations
Take-back	No

Dimensions Drawings

Dimensions with Servo Motor Adaptation Kit

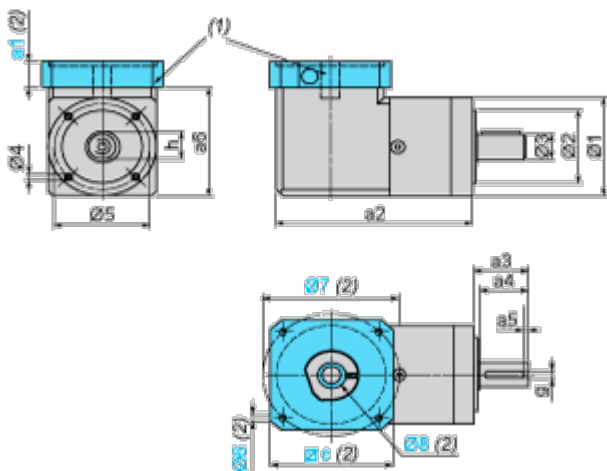

- (1) GBK adaptation kit
- (2) GBK adaptation kit related dimensions a1, c, Ø6, Ø7, Ø8 depend on the gearbox and servo motor combination
- Ø8 shaft end adaptor in case motor shaft diameter is smaller than gearbox input coupling diameter

Values in mm

a2	a3	a4	a5	h	g	Ø1	Ø2	Ø3	Ø4	Ø5	a6
112.5	35	30	2.5	16	5	60	40 h7	14 h7	M5 x 8	52	80.3

Values in in.

a2	a3	a4	a5	h	g	Ø1	Ø2	Ø3	Ø4	Ø5	a6
4.43	1.38	1.18	0.09	0.63	0.19	2.36	1.57 h7	0.55 h7	M5 x 0.31	2.05	3.16