

# Product data sheet

Specifications



## TeSys Deca Manual Starter and Protector, thermal magnetic circuit protector, push buttons, 0.16...0.25 A, spring terminals

GV2ME023

**Product availability: Non-Stock - Not normally stocked in distribution facility**

### Main

|                           |                       |
|---------------------------|-----------------------|
| Range                     | TeSys Deca            |
| Product name              | TeSys GV2             |
| Product or Component Type | Motor circuit breaker |
| Device short name         | GV2ME                 |
| Device Application        | Motor protection      |
| Trip unit technology      | Thermal-magnetic      |

### Complementary

|                                                     |                                                                                                                                                                                                                                  |
|-----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Poles description                                   | 3P                                                                                                                                                                                                                               |
| Network type                                        | AC                                                                                                                                                                                                                               |
| Utilisation category                                | Category A IEC 60947-2<br>AC-3 IEC 60947-4-1<br>AC-3e IEC 60947-4-1                                                                                                                                                              |
| Network frequency                                   | 50/60 Hz IEC 60947-2                                                                                                                                                                                                             |
| Motor power kW                                      | 0.06 kW 400/415 V AC 50/60 Hz                                                                                                                                                                                                    |
| Breaking capacity                                   | 100 kA Icu 230/240 V AC 50/60 Hz IEC 60947-2<br>100 kA Icu 400/415 V AC 50/60 Hz IEC 60947-2<br>100 kA Icu 440 V AC 50/60 Hz IEC 60947-2<br>100 kA Icu 500 V AC 50/60 Hz IEC 60947-2<br>100 kA Icu 690 V AC 50/60 Hz IEC 60947-2 |
| [Ics] rated service short-circuit breaking capacity | 100 % 230/240 V AC 50/60 Hz IEC 60947-2<br>100 % 400/415 V AC 50/60 Hz IEC 60947-2<br>100 % 440 V AC 50/60 Hz IEC 60947-2<br>100 % 500 V AC 50/60 Hz IEC 60947-2<br>100 % 690 V AC 50/60 Hz IEC 60947-2                          |
| Control Type                                        | Push-button                                                                                                                                                                                                                      |
| Line Rated Current                                  | 0.25 A                                                                                                                                                                                                                           |
| Thermal protection adjustment range                 | 0.16...0.25 A IEC 60947-2                                                                                                                                                                                                        |
| Magnetic tripping current                           | 3.08 A                                                                                                                                                                                                                           |
| [Ith] conventional free air thermal current         | 0.25 A IEC 60947-2                                                                                                                                                                                                               |
| [Ue] rated operational voltage                      | 690 V AC 50/60 Hz IEC 60947-2                                                                                                                                                                                                    |
| [Ui] rated insulation voltage                       | 690 V AC 50/60 Hz IEC 60947-2                                                                                                                                                                                                    |
| [Uimp] rated impulse withstand voltage              | 6 kV IEC 60947-2                                                                                                                                                                                                                 |
| Phase failure sensitivity                           | Yes IEC 60947-4-1                                                                                                                                                                                                                |
| Suitability for isolation                           | Yes IEC 60947-1                                                                                                                                                                                                                  |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

|                            |                                                                                                                                                                                                                                                            |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power dissipation per pole | 2.5 W                                                                                                                                                                                                                                                      |
| Mechanical durability      | 100000 cycles                                                                                                                                                                                                                                              |
| Electrical durability      | 100000 cycles AC-3 415 V In<br>100000 cycles AC-3e 415 V In                                                                                                                                                                                                |
| Rated duty                 | Uninterrupted IEC 60947-4-1                                                                                                                                                                                                                                |
| Connections - terminals    | Power circuit spring terminals 2 0.002...0.009 in² (1...6 mm²)solid<br>Power circuit spring terminals 2 0.002...0.006 in² (1.5...4 mm²)flexible without cable end<br>Power circuit spring terminals 2 0.002...0.006 in² (1...4 mm²)flexible with cable end |
| Fixing mode                | 35 mm symmetrical DIN rail clipped<br>Panel screwed with adaptor plate)                                                                                                                                                                                    |
| Mounting position          | Horizontal<br>Vertical                                                                                                                                                                                                                                     |
| Width                      | 1.8 in (45 mm)                                                                                                                                                                                                                                             |
| Height                     | 4.0 in (101 mm)                                                                                                                                                                                                                                            |
| Depth                      | 3.09 in (78.5 mm)                                                                                                                                                                                                                                          |
| Net Weight                 | 0.62 lb(US) (0.28 kg)                                                                                                                                                                                                                                      |
| color                      | Dark grey                                                                                                                                                                                                                                                  |

## Environment

|                                       |                                                                                                                                          |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Standards                             | EN/IEC 60947-2<br>EN/IEC 60947-4-1<br>UL 60947-4-1<br>CSA C22.2 No 60947-4-1<br>IEC/EN 60335-2-40:Annex JJ<br>IEC/EN 60335-1:Clause 30.2 |
| Product Certifications                | CCC<br>UL<br>CSA<br>EAC<br>ATEX<br>LROS (Lloyds register of shipping)<br>BV<br>RINA<br>DNV-GL<br>UKCA                                    |
| IK degree of protection               | IK04                                                                                                                                     |
| IP degree of protection               | IP20 IEC 60529                                                                                                                           |
| Climatic withstand                    | IACS E10                                                                                                                                 |
| Ambient Air Temperature for Storage   | -40...176 °F (-40...80 °C)                                                                                                               |
| Fire resistance                       | 1760 °F (960 °C) IEC 60695-2-11                                                                                                          |
| Ambient air temperature for operation | -4...140 °F (-20...60 °C)                                                                                                                |
| Mechanical robustness                 | Shocks 30 Gn for 11 ms<br>Vibrations 5 Gn, 5...150 Hz                                                                                    |
| Operating altitude                    | <= 6561.68 ft (2000 m)                                                                                                                   |

## Ordering and shipping details

|                   |               |
|-------------------|---------------|
| Category          | US10I1122367  |
| Discount Schedule | 0I11          |
| GTIN              | 3389110346350 |
| Returnability     | No            |

|                   |    |
|-------------------|----|
| Country of origin | FR |
|-------------------|----|

## Packing Units

|                              |                          |
|------------------------------|--------------------------|
| Unit Type of Package 1       | PCE                      |
| Nbr. of units in pkg.        | 1                        |
| Package 1 Height             | 2.2 in (5.5 cm)          |
| Package 1 Width              | 4.3 in (11 cm)           |
| Package 1 Length             | 3.3 in (8.5 cm)          |
| Package weight(Lbs)          | 9.2 oz (262 g)           |
| Unit Type of Package 2       | S02                      |
| Number of Units in Package 2 | 20                       |
| Package 2 Height             | 5.9 in (15 cm)           |
| Package 2 Width              | 11.8 in (30 cm)          |
| Package 2 Length             | 15.7 in (40 cm)          |
| Package 2 Weight             | 12.291 lb(US) (5.575 kg) |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

| Environmental footprint                        |    |
|------------------------------------------------|----|
| Carbon footprint (kg CO2 eq, Total Life cycle) | 43 |

Use Better

| Materials and Substances               |                                                                                                                                                                                                                                                           |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Packaging made with recycled cardboard | Yes                                                                                                                                                                                                                                                       |
| Packaging without single use plastic   | Yes                                                                                                                                                                                                                                                       |
| <a href="#">EU RoHS Directive</a>      | Compliant with Exemptions                                                                                                                                                                                                                                 |
| SCIP Number                            | 04104e70-ba29-493c-b2cc-b5837d1f879b                                                                                                                                                                                                                      |
| REACH Regulation                       | <a href="#">REACH Declaration</a>                                                                                                                                                                                                                         |
| California proposition 65              | WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |

Use Again

| Repack and remanufacture |                                                                                                                                                                                                                  |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Circularity Profile      | <a href="#">End of Life Information</a>                                                                                                                                                                          |
| Take-back                | No                                                                                                                                                                                                               |
| WEEE Label               |  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |

Performance Curves

Thermal-Magnetic Tripping Curves for GV2ME and GV2P  
Average Operating Times at 20 °C Related to Multiples of the Setting Current



- 1 3 poles from cold state
- 2 2 poles from cold state
- 3 3 poles from hot state

Current Limitation on Short-Circuit for GV2ME and GV2P (3-Phase 400/415 V)

Dynamic Stress

I peak = f (prospective Isc) at 1.05 Ue = 435 V



- 1 Maximum peak current
- 2 24-32 A
- 3 20-25 A
- 4 17-23 A
- 5 13-18 A
- 6 9-14 A
- 7 6-10 A
- 8 4-6.3 A
- 9 2.5-4 A
- 10 1.6-2.5 A
- 11 1-1.6 A
- 12 Limit of rated ultimate breaking capacity on short-circuit of GV2ME (14, 18, 23, and 25 A ratings).

Thermal Limit on Short-Circuit for GV2ME

Thermal Limit in kA<sup>2</sup>s in the Magnetic Operating Zone

Sum of I<sup>2</sup>dt = f (prospective Isc) at 1.05 Ue = 435 V




- 1 24-32 A
- 2 20-25 A
- 3 17-23 A
- 4 13-18 A
- 5 9-14 A
- 6 6-10 A
- 7 4-6.3 A
- 8 2.5-4 A
- 9 1.6-2.5 A
- 10 1-1.6 A

Dimensions Drawings

Dimension

GV2ME

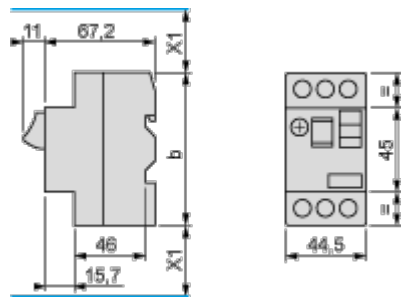

(1) Maximum


X1 Electrical clearance = 40 mm for  $U_e \leq 690\text{ V}$

|          | b   |
|----------|-----|
| GV2ME●●  | 89  |
| GV2ME●●3 | 101 |

Mounting

GV2ME


On 35 mm rail



c = 78.5 on AM1 DP200 (35 x 7.5)


c = 86 on AM1 DE200, ED200 (35 x 15)

On panel with adapter plate GV2AF02

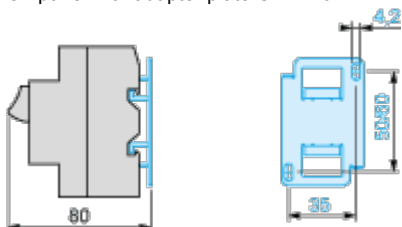


On pre-slotted plate AM1 PA

AF1 EA4




On rails DZ5 MB201




GV2AF01

Combination GV2ME + TeSys k contactor

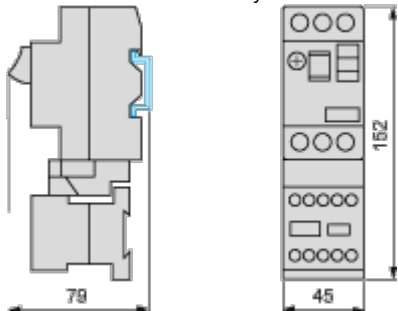

GV2AF3

Combination GV2ME + TeSys d contactor

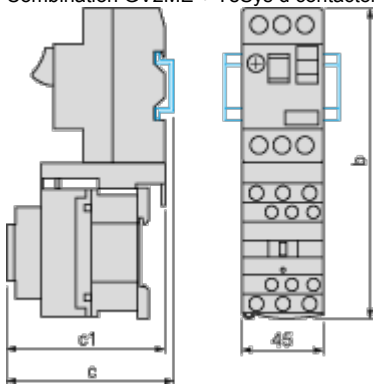

| GV2ME + | LC1D09...D18 | LC1D25 and D32 |
|---------|--------------|----------------|
| b       | 176.4        | 186.8          |
| c1      | 94.1         | 100.4          |
| c       | 99.6         | 105.9          |

GV2AF4 + LAD311

Combination GV2ME + TeSys d contactor



| GV2ME + | LC1D09...D18 | LC1D25 and D32 |
|---------|--------------|----------------|
| b       | 176.4        | 186.8          |
| c1      | 103.1        | 136.4          |
| c       | 135.6        | 141.9          |
| d1      | 107          | 107            |
| d       | 112.5        | 112.5          |

GV2ME + GV1L3 (Current Limiter)



X1 = 10 mm for Ue = 230 V or 30 mm for 230 V < Ue ≤ 690 V

Connections and Schema

GV2ME•• and GV2RT



Connection of Undervoltage Trip for Dangerous Machines (Conforming to INRS) on GV2ME Only



Offer Marketing Illustration

Product benefits / Features

---



The image shows a TeSys Deca Motor Circuit Breaker, a black industrial device with a red handle. It has three main terminals at the top labeled 1, 2, and 3, and three at the bottom labeled 2, 4, and 6. The front panel features a red handle with 'ON' and 'OFF' positions, a 'RESET' button, and a 'STOP' button. A small display shows '12.23A'. A QR code is visible on the bottom left of the front panel. The Schneider logo is at the bottom right of the front panel.

### TeSys Deca Motor Circuit Breakers

#### Technical Benefits

- High breaking capacity up to 100 kA.
- Screw clamp for the connection, with lug and spring terminals.
- Easily identify the tripped breaker.
- Padlockable in all versions.
- Sealable thermal overload settings without additional accessories.
- Short circuit indication for better diagnostics when a trip occurs.
- Maximum 15 current ratings to cover from 0.1 A to 32 A motor current with a IP20 level for finger safety.

Offer Marketing Illustration

Product benefits / Features

---

### TeSys Deca

Motor Circuit Breakers





**Universal Integration**  
Can be used for all type of applications across industry, infrastructure and buildings.



**Complete protection**  
Provide short circuit protection, overload protection, motor (ON/OFF) control, all in a single product.



**Standard Sync**  
Compliant to motor control and protection, in accordance with standards.

Sep 17, 2025

Life Is On | 

13

Offer Marketing Illustration

Product benefits / Features

---



### TeSys Deca Motor Circuit Breakers

Range Accessories



Energy Sensor



Mounting and adapters



Terminal block



Combination block



Motor starter  
adapter plate



Current limiter



Comb busbar



Auxiliary  
contact blocks

Image of product / Alternate images

Alternative

---

