

Product data sheet

Specifications



touch panel screen, Harmony STO & STU, 4.3inch wide, RS 232/485 RJ45

HMISTO715

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony STO & STU
Product or Component Type	Touch panel screen
Software package	EcoStruxure Operator Terminal Expert

Complementary

Display size	4.3 inch
Display Type	Colour TFT LCD
Display colour	65536 colours
Display Resolution	480 x 272 pixels
Touch panel	Analogue
Backlight lifespan	50000 hours white
Brightness	16 levels via touch panel
Character font	Chinese (simplified Chinese) Japanese (ANK, Kanji) ASCII (European characters) Taiwanese (traditional Chinese) Korean Cyrillic
[Us] rated supply voltage	12...24 V DC - 10...20 %
Power Consumption in W	7.5 W
Number of pages	8999
Memory description	Back up of data 512 KB Application memory 26 MB
Integrated connection type	1 USB 2.0 type mini B 1 USB 2.0 type A 1 serial link - RJ45 - RS232C/RS485 2400...115200 bps)
Supply	External source
Realtime clock	With RTC-battery set optional
Downloadable protocols	Third party protocols Modbus
Range Compatibility	Mitsubishi Omron Siemens Allen-Bradley
Fixing mode	By 2 installation fasteners 1.5 to 6 mm thick panel
Enclosure Material	PPT
Front material	Plastic

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Cut-out dimensions	77.5 x 112.5 mm 66 x 105 mm with mounting adaptor
Height	3.6 in (90.4 mm)
Width	4.9 in (124.9 mm)
Depth	1.5 in (38.8 mm)
Net Weight	0.49 lb(US) (0.22 kg)

Environment

Standards	ANSI/ISA 12.12.01 CSA C22.2 No 142 UL 61010-2-201 EN 61000-6-2 CSA C22.2 No 213 EN 61000-6-4 UL 61010-1 EN 61131-2
Product Certifications	UL C-tick KCC CE cUL ATEX zone 2/22 UKCA
Ambient Air Temperature for Operation	32...122 °F (0...50 °C)
Ambient Air Temperature for Storage	-4...140 °F (-20...60 °C)
Relative humidity	10...90 % without condensation
Operating altitude	6561.68 ft (2000 m)
IP degree of protection	IP65f front panel) IP20 rear panel)
NEMA degree of protection	NEMA 4X/13 front panel indoor use)
Shock resistance	15 gn 11 msIEC 61131-2
Vibration resistance	1 gn 5...150 Hz) IEC 61131-2 3.5 mm constant amplitude 5...150 Hz) IEC 61131-2
Electromagnetic compatibility	Resistance to radiated electromagnetic fields - test level: 10 V/m (80 MHz...2.7 GHz) Resistance to electrostatic discharge - test level: 8 kV level 3 (air discharge) conforming to EN 61000-4-2 Resistance to electrostatic discharge - test level: 6 kV level 3 (direct contact) conforming to EN 61000-4-2

Ordering and shipping details

Category	US10MC222569
Discount Schedule	0MC2
GTIN	3606480920905
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.756 in (7.000 cm)
Package 1 Width	5.118 in (13.000 cm)

Package 1 Length	7.087 in (18.000 cm)
Package weight(Lbs)	18.660 oz (529.000 g)
Unit Type of Package 2	S03
Number of Units in Package 2	12
Package 2 Height	11.811 in (30.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	14.980 lb(US) (6.795 kg)
Unit Type of Package 3	P06
Number of Units in Package 3	96
Package 3 Height	29.528 in (75.000 cm)
Package 3 Width	23.622 in (60.000 cm)
Package 3 Length	31.496 in (80.000 cm)
Package 3 Weight	138.891 lb(US) (63.000 kg)



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) **637**

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

F-gas usage performance **Only air and vacuum used for insulation / breaking, no F-gas including SF6**

Packaging made with recycled cardboard **Yes**

Packaging without single use plastic **No**

[EU RoHS Directive](#) **Pro-active compliance (Product out of EU RoHS legal scope)**

SCIP Number **7155ec3f-2b83-4049-8830-d31f9c3341be**

REACH Regulation [REACH Declaration](#)

California proposition 65 **WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Halogen content performance **Product contains halogen above thresholds**

PVC free **No**

Silicon free **No**

Use Again

Repack and remanufacture


Circularity Profile [End of Life Information](#)

Take-back **No**

WEEE Label  **The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.**


Dimensions Drawings

External Dimensions

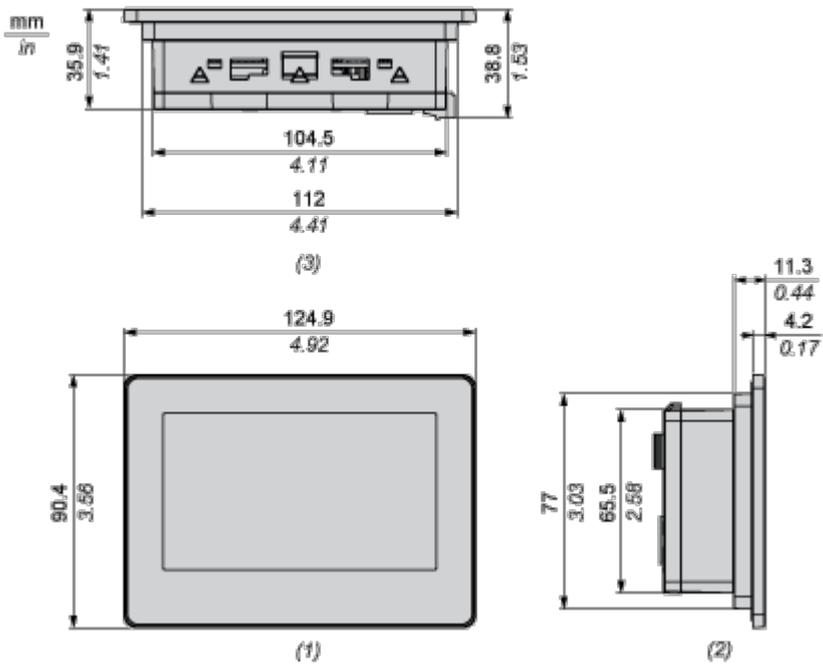

- 1 Front
- 2 Left
- 3 Bottom

Dimensions with Installation Fasteners

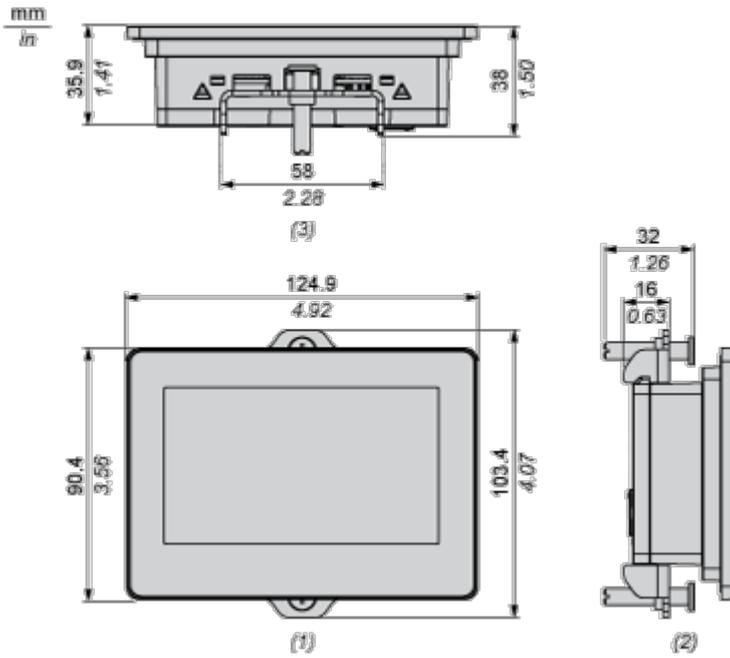


- 1 Front
- 2 Left
- 3 Bottom

Mounting and Clearance

Mounting

Panel Cut-out Dimensions

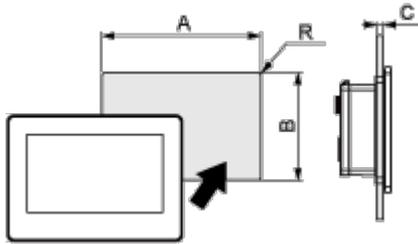

Dimensions in mm


Description	A	B	C	R
Without adapter	112.5	77.5	1.5...6	3 max.
With adapter	105	66	1.5...6	3 max.

Dimensions in in.

Description	A	B	C	R
Without adapter	4.43	3.05	0.06...0.24	0.12 max.
With adapter	4.13	2.6	0.06...0.24	0.12 max.


Installation Requirements

Mounting Angle



When installing this product in a slanted position with an incline more than 30°, the ambient temperature must not exceed 40 °C (104 °F). You may need to use forced air cooling (fan, A/C) to ensure the ambient operating temperature is 40 °C or less (104 °F or less).

Clearance

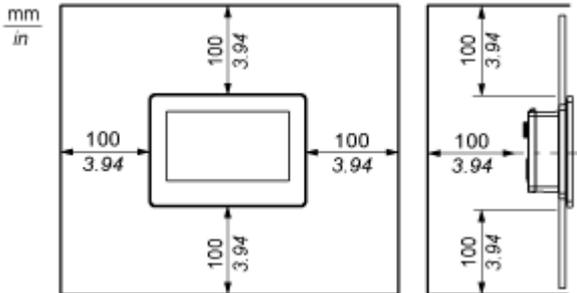

Offer Marketing Illustration

Product benefits / Features

The infographic features a central image of a tablet displaying a monitoring interface with a large '16.4' and various data points. Surrounding this central image are six circular icons, each with a corresponding text description of a feature. The background is a solid green color.

Features Harmony STO

- Compact body**: Represented by an icon of two overlapping rectangles.
- Enable remote monitoring by PC, tablet and smartphone**: Represented by an icon of a house with an arrow pointing out.
- Crisp and clear visualization**: Represented by an icon of a computer monitor showing a bar chart.
- Easy data handling with USB**: Represented by a USB symbol.
- Connect with various devices**: Represented by an icon of a central node connected to three peripheral nodes.
- Create highly responsive screens with ease by configuration software "EcoStruxure™ Operator Terminal Expert"**: Represented by an icon of a computer monitor with a gear.

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony STO

