

# Product data sheet

Specifications



## Remote control cable, Harmony SCU, 5 m for panel

HMIZSURDP5

**Product availability: Non-Stock - Not normally stocked in distribution facility**

### Main

Product or Component Type	Remote control cable
---------------------------	----------------------

### Complementary

Cable length	16.4 ft (5 m)
--------------	---------------

### Ordering and shipping details

Category	US10MC222569
----------	--------------

Discount Schedule	0MC2
-------------------	------

GTIN	3606480564673
------	---------------

Returnability	No
---------------	----

Country of origin	CN
-------------------	----

### Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Nbr. of units in pkg.	1
-----------------------	---

Package 1 Height	2.83 in (7.2 cm)
------------------	------------------

Package 1 Width	7.24 in (18.4 cm)
-----------------	-------------------

Package 1 Length	10.51 in (26.7 cm)
------------------	--------------------

Package weight(Lbs)	30.7 oz (870 g)
---------------------	-----------------

Unit Type of Package 2	S03
------------------------	-----

Number of Units in Package 2	6
------------------------------	---

Package 2 Height	11.81 in (30 cm)
------------------	------------------

Package 2 Width	11.81 in (30 cm)
-----------------	------------------

Package 2 Length	15.75 in (40 cm)
------------------	------------------

Package 2 Weight	11.95 lb(US) (5.42 kg)
------------------	------------------------

Unit Type of Package 3	PAL
------------------------	-----

Number of Units in Package 3	48
------------------------------	----

Package 3 Height	27.56 in (70 cm)
------------------	------------------

Package 3 Width	23.62 in (60 cm)
-----------------	------------------

Package 3 Length	31.50 in (80 cm)
------------------	------------------

Package 3 Weight	95.59 lb(US) (43.36 kg)
------------------	-------------------------

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

## Use Better


 <b>Materials and Substances</b>	
F-gas usage performance	Only air and vacuum used for insulation / breaking, no F-gas including SF6
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
<a href="#">EU RoHS Directive</a>	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	69107a2b-eec5-4280-8fc1-e988a903c9a2
REACH Regulation	<a href="#">REACH Declaration</a>
California proposition 65	<b>WARNING:</b> This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>

## Use Again

 <b>Repack and remanufacture</b>	
Circularity Profile	No need of specific recycling operations
Take-back	No
WEEE	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings

Dimensions

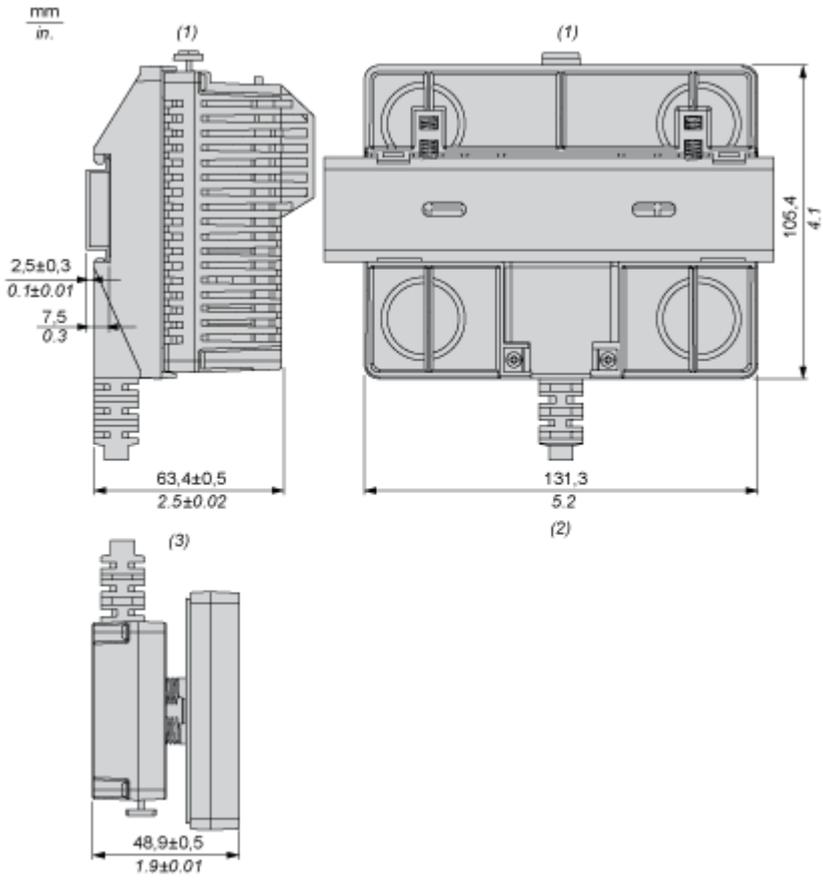


- (1) Rear module
- (2) Rear module remote cable
- (3) Panel remote cable

Mounting and Clearance

Recommended Mounting position


---

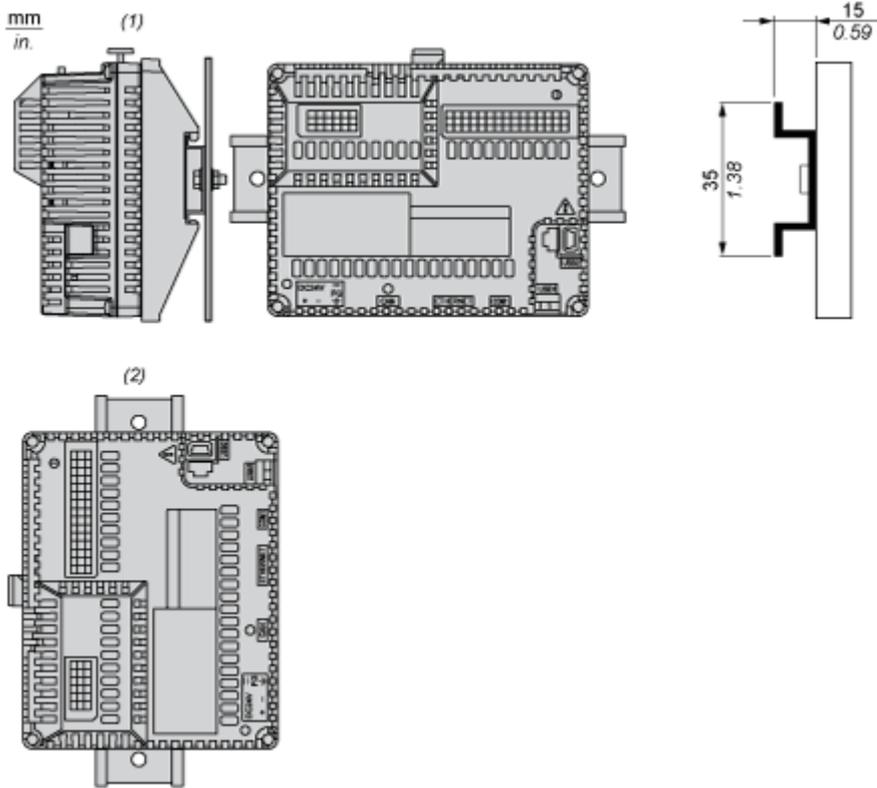

- (1) Horizontal mounting
- (2) Vertical mounting


No Recommended Mounting Position

---

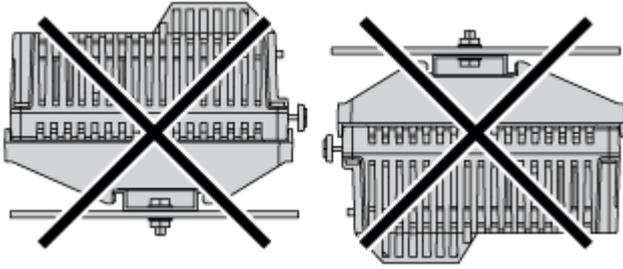

Clearance

---

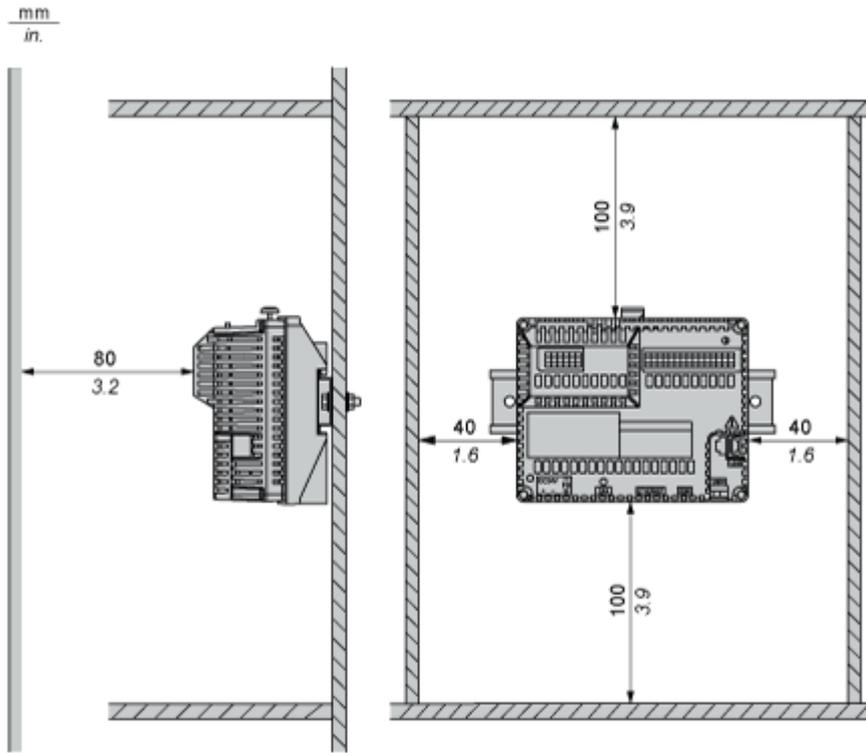

Keep adequate spacing for proper ventilation to maintain an ambient temperature between 0...50 °C (32...122 °F) for horizontal installation and 0...40 °C (32...104 °F) for vertical installation.