

# Product data sheet

Specifications



IEC contactor, TeSys Deca, nonreversing, 32A, 20HP at 480VAC, 3 phase, 3 pole, 3 NO, 24VDC coil, open style

LC1D326BD

**Product availability:** Stock - Normally stocked in distribution facility

## Main

Range of Product	TeSys Deca
Product or Component Type	Contactor
Device short name	LC1D
Contactor application	Resistive load Motor control
Utilisation category	AC-3 AC-4 AC-1 AC-3e
Poles description	3P
[Ue] rated operational voltage	Power circuit <= 690 V AC 25...400 Hz Power circuit <= 300 V DC
[Ie] rated operational current	32 A (at <140 °F (60 °C)) at <= 440 V AC AC-3 for power circuit 50 A (at <140 °F (60 °C)) at <= 440 V AC AC-1 for power circuit 32 A (at <140 °F (60 °C)) at <= 440 V AC AC-3e for power circuit
[Uc] control circuit voltage	24 V DC

## Complementary

Motor power kW	7.5 kW at 220...230 V AC 50/60 Hz (AC-3) 15 kW at 380...400 V AC 50/60 Hz (AC-3) 15 kW at 415...440 V AC 50/60 Hz (AC-3) 18.5 kW at 500 V AC 50/60 Hz (AC-3) 18.5 kW at 660...690 V AC 50/60 Hz (AC-3) 7.5 kW at 400 V AC 50/60 Hz (AC-4) 7.5 kW at 220...230 V AC 50/60 Hz (AC-3e) 15 kW at 380...400 V AC 50/60 Hz (AC-3e) 15 kW at 415...440 V AC 50/60 Hz (AC-3e) 18.5 kW at 500 V AC 50/60 Hz (AC-3e) 18.5 kW at 660...690 V AC 50/60 Hz (AC-3e)
Maximum Horse Power Rating	2 hp at 115 V AC 50/60 Hz for 1 phase motors 5 hp at 230/240 V AC 50/60 Hz for 1 phase motors 10 hp at 200/208 V AC 50/60 Hz for 3 phase motors 10 hp at 230/240 V AC 50/60 Hz for 3 phase motors 20 hp at 460/480 V AC 50/60 Hz for 3 phase motors 25 hp at 575/600 V AC 50/60 Hz for 3 phase motors
Compatibility code	LC1D
Pole contact composition	3 NO
Protective cover	With
[Ith] conventional free air thermal current	10 A (at 140 °F (60 °C)) for signalling circuit 50 A (at 140 °F (60 °C)) for power circuit

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>Irms rated making capacity</b>	140 A AC for signalling circuit conforming to IEC 60947-5-1 250 A DC for signalling circuit conforming to IEC 60947-5-1 550 A at 440 V for power circuit conforming to IEC 60947
<b>Rated breaking capacity</b>	550 A at 440 V for power circuit conforming to IEC 60947
<b>[Icw] rated short-time withstand current</b>	260 A 104 °F (40 °C) - 10 s for power circuit 430 A 104 °F (40 °C) - 1 s for power circuit 60 A 104 °F (40 °C) - 10 min for power circuit 138 A 104 °F (40 °C) - 1 min for power circuit 100 A - 1 s for signalling circuit 120 A - 500 ms for signalling circuit 140 A - 100 ms for signalling circuit
<b>Associated fuse rating</b>	10 A gG for signalling circuit conforming to IEC 60947-5-1 63 A gG at <= 690 V coordination type 1 for power circuit 63 A gG at <= 690 V coordination type 2 for power circuit
<b>Average impedance</b>	2 mOhm - Ith 50 A 50 Hz for power circuit
<b>Power dissipation per pole</b>	2 W AC-3 5 W AC-1 2 W AC-3e
<b>[Ui] rated insulation voltage</b>	Power circuit 690 V IEC 60947-4-1 Power circuit 600 V CSA Power circuit 600 V UL Signalling circuit 690 V IEC 60947-1 Signalling circuit 600 V CSA Signalling circuit 600 V UL
<b>Overvoltage category</b>	III
<b>Pollution degree</b>	3
<b>[Uimp] rated impulse withstand voltage</b>	6 kV IEC 60947
<b>Safety reliability level</b>	B10d = 1369863 cycles contactor with nominal load EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load EN/ISO 13849-1
<b>Mechanical durability</b>	30 Mcycles
<b>Electrical durability</b>	1.65 Mcycles 32 A AC-3 <= 440 V 1.4 Mcycles 50 A AC-1 <= 440 V 1.65 Mcycles 25 A AC-3e <= 440 V
<b>Control circuit type</b>	DC standard
<b>Coil technology</b>	Built-in bidirectional peak limiting diode suppressor
<b>Control circuit voltage limits</b>	0.1...0.25 Uc (-40...158 °F (-40...70 °C)):drop-out DC 0.7...1.25 Uc (-40...140 °F (-40...60 °C)):operational DC 1...1.25 Uc (140...158 °F (60...70 °C)):operational DC
<b>Inrush power in W</b>	5.4 W 68 °F (20 °C)
<b>Hold-in power consumption in W</b>	5.4 W 68 °F (20 °C)
<b>Operating time</b>	63 ±15 % ms closing 20 ±20 % ms opening
<b>Time constant</b>	28 ms
<b>Maximum operating rate</b>	3600 cyc/h at 60 °C
<b>Connections - terminals</b>	Control circuit: lugs-ring terminals - external diameter: 0.3 in (8 mm) Power circuit: lugs-ring terminals - external diameter: 0.4 in (10 mm)
<b>Tightening torque</b>	Control circuit 15.05 lbf.in (1.7 N.m) lugs-ring terminals flat Ø 6 mm M3.5 Control circuit 15.05 lbf.in (1.7 N.m) lugs-ring terminals Philips No 2 M3.5 Power circuit 22.1 lbf.in (2.5 N.m) lugs-ring terminals flat Ø 8 mm M4 Power circuit 22.1 lbf.in (2.5 N.m) lugs-ring terminals Philips No 2 M4 Control circuit 15.05 lbf.in (1.7 N.m) screw clamp terminals pozidriv No 2 Power circuit 22.1 lbf.in (2.5 N.m) screw clamp terminals pozidriv No 2
<b>Auxiliary contact composition</b>	1 NO + 1 NC
<b>Auxiliary contacts type</b>	Mechanically linked 1 NO + 1 NC IEC 60947-5-1 Mirror contact 1 NC IEC 60947-4-1

<b>Signalling circuit frequency</b>	25...400 Hz
<b>Minimum switching voltage</b>	17 V for signalling circuit
<b>Minimum switching current</b>	5 mA for signalling circuit
<b>Insulation resistance</b>	> 10 MΩ for signalling circuit
<b>Non-overlap time</b>	1.5 ms on de-energisation between NC and NO contact 1.5 ms on energisation between NC and NO contact
<b>Mounting Support</b>	Rail Plate

## Environment

<b>Standards</b>	CSA C22.2 No 14 EN 60947-4-1 EN 60947-5-1 IEC 60947-4-1 IEC 60947-5-1 UL 60947-4-1 IEC 60335-1:Clause 30.2 IEC 60335-2-40:Annex JJ UL 60335-2-40:Annex JJ CSA C22.2 No 60947-4-1
<b>Product Certifications</b>	UL CCC CSA Marine UKCA EAC CB Scheme
<b>IP degree of protection</b>	IP20 front face IEC 60529
<b>Protective treatment</b>	THIEC 60068-2-30
<b>Climatic withstand</b>	IACS E10 exposure to damp heat IEC 60947-1 Annex Q category D exposure to damp heat
<b>Permissible ambient air temperature around the device</b>	-40...140 °F (-40...60 °C) 140...158 °F (60...70 °C) with derating
<b>Operating altitude</b>	0...9842.52 ft (0...3000 m)
<b>Fire resistance</b>	1562 °F (850 °C) IEC 60695-2-1
<b>Flame retardance</b>	V1 conforming to UL 94
<b>Mechanical robustness</b>	Vibrations contactor open 2 Gn, 5...300 Hz) Vibrations contactor closed 4 Gn, 5...300 Hz) Shocks contactor closed 15 Gn for 11 ms) Shocks contactor open 8 Gn for 11 ms)
<b>Height</b>	3.3 in (85 mm)
<b>Width</b>	1.8 in (45 mm)
<b>Depth</b>	4.0 in (101 mm)
<b>Net Weight</b>	1.179 lb(US) (0.535 kg)

## Ordering and shipping details

<b>Category</b>	US10I1222355
<b>Discount Schedule</b>	0I12
<b>GTIN</b>	3389110807967
<b>Returnability</b>	Yes
<b>Country of origin</b>	ID

## Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.165 in (5.500 cm)
Package 1 Width	3.740 in (9.500 cm)
Package 1 Length	4.606 in (11.700 cm)
Package weight(Lbs)	21.034 oz (596.300 g)
Unit Type of Package 2	S02
Number of Units in Package 2	15
Package 2 Height	5.906 in (15.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	20.291 lb(US) (9.204 kg)
Unit Type of Package 3	P06
Number of Units in Package 3	240
Package 3 Height	29.528 in (75.000 cm)
Package 3 Width	31.496 in (80.000 cm)
Package 3 Length	23.622 in (60.000 cm)
Package 3 Weight	342.316 lb(US) (155.272 kg)

## Contractual warranty

Warranty	18 months
----------	-----------



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

## Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) **45**

Environmental Disclosure [Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard **Yes**

Packaging without single use plastic **Yes**

[EU RoHS Directive](#) **Compliant with Exemptions**

SCIP Number **50ae7612-fd2e-41e4-a369-50d0dea6e592**

REACH Regulation [REACH Declaration](#)

California proposition 65  
WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. For more information go to [www.P65Warnings.ca.gov](#)

PVC free **Yes**

## Use Again

### Repack and remanufacture

Circularity Profile [End of Life Information](#)


Take-back **No**

WEEE Label  
 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Image of product / Alternate images

Alternative

---

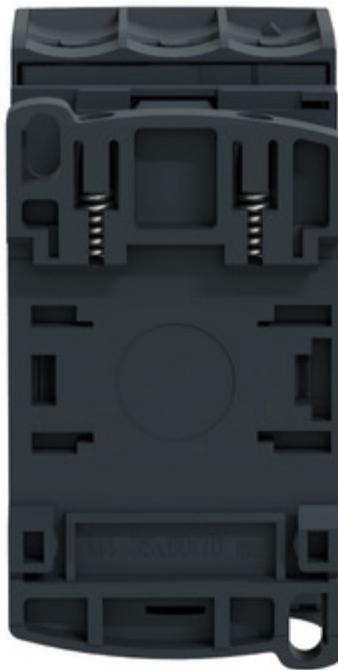



## Technical Illustration

## Assembly's dimensions

