

Product End-of-Life Instructions

PacDrive 3

Product Range

High Performance Motion Controller

Marketing Model

LMC 101C, LMC 201C




Size in mm:

H x L x D : 222 x 270 x 44

Weight in kg:

2.20 (with packaging)

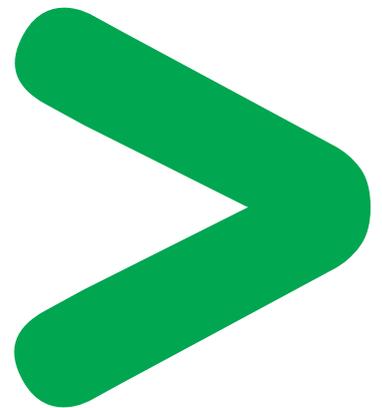

Operations recommended for the end of life treatment


There are several steps to process the products at the end of life so as to recover components, materials or energy :

Reuse ⇒ Separation for special treatment ⇒ Other dismantling ⇒ Shredding

The components of the products that optimize the recycling performances are listed, identified and located hereunder.

This product contains printed circuit boards which are recommended to be treated separately during the End of Life operations.

PacDrive LMC 101C / LMC 201C series contain batteries which may cause the electrical shock during the end of life treatment process, even when the equipment is not connected to electrical network.

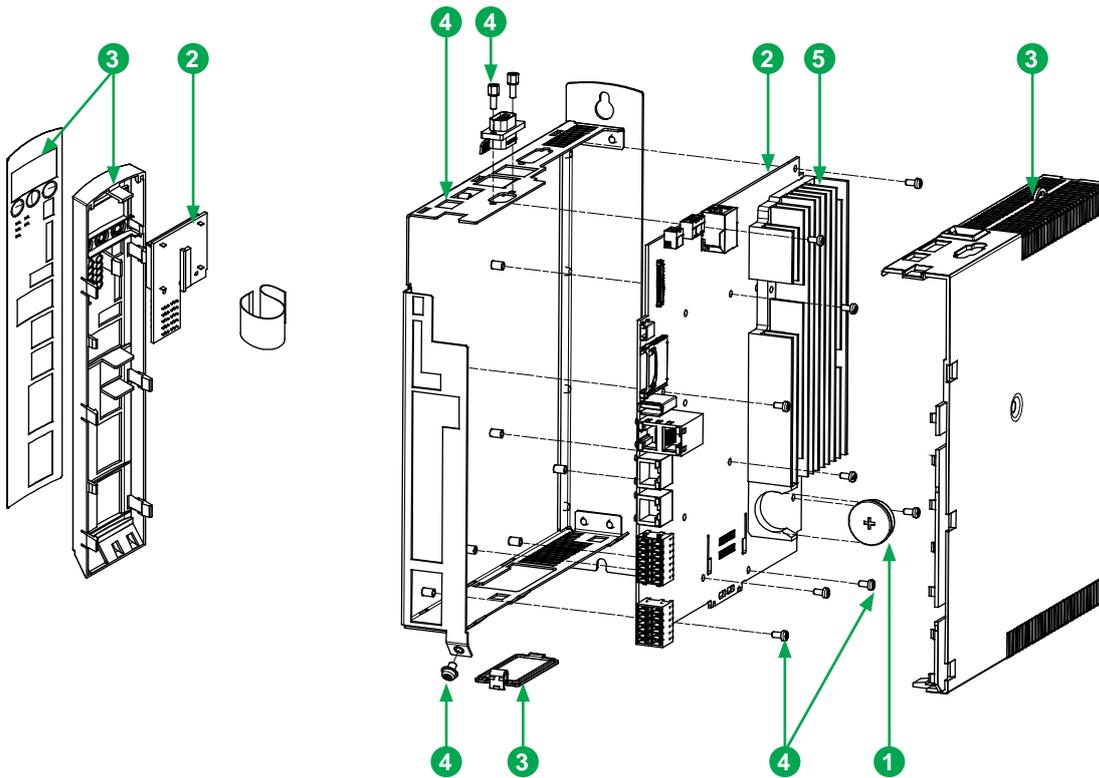

Recommendation	Number on drawing	Components	Weight (g)	Comment
Operating hazards	1	Battery	–	Electrical shock
Reuse	None	None	–	–
Special treatment	1	Battery	< 50	–
	2	PCBAs	400	–
Other dismantling	3	Plastic	200	Polycarbonate
	4	Steel	650	–
	5	Aluminium	300	–
	None	Cables and Connectors	–	–

Schneider Electric Industries SAS

35, rue Joseph Monier
CS30323
F - 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439
Capital social 896 313 776 €
www.schneider-electric.com

The version of the Guide used to create the document: End of Life Instruction Drafting Guide of Schneider Electric version V2.

Publication : Schneider Electric