


CURRENT SETTING RANGE AMPS	TERMINAL TORQUE (LB. IN.)	CLASS 10 TRIP CODE (1)	CLASS 20 TRIP CODE (1)
90-150	-	369	569

NOTE: ALL LR9D SOLID STATE OVERLOAD RELAYS ARE RATED FOR 1,000 VOLTS.

(1) = SELECT DESIRED SUFFIX FOR COMPLETE CATALOG NUMBER

LUG PART NUMBERS		MAXIMUM CABLE SIZE	SUITABLE FOR OVERLOAD RELAY LR9-D5(1)
SINGLE LUG	SET OF SIX LUGS		
DZ2FG1	DZ2FG6	3/0	369, 569

NOTE: ALL OVERLOAD RELAYS DEPICTED DIRECTLY MOUNT TO CONTACTORS LC1-D115 THROUGH LC1-D150.

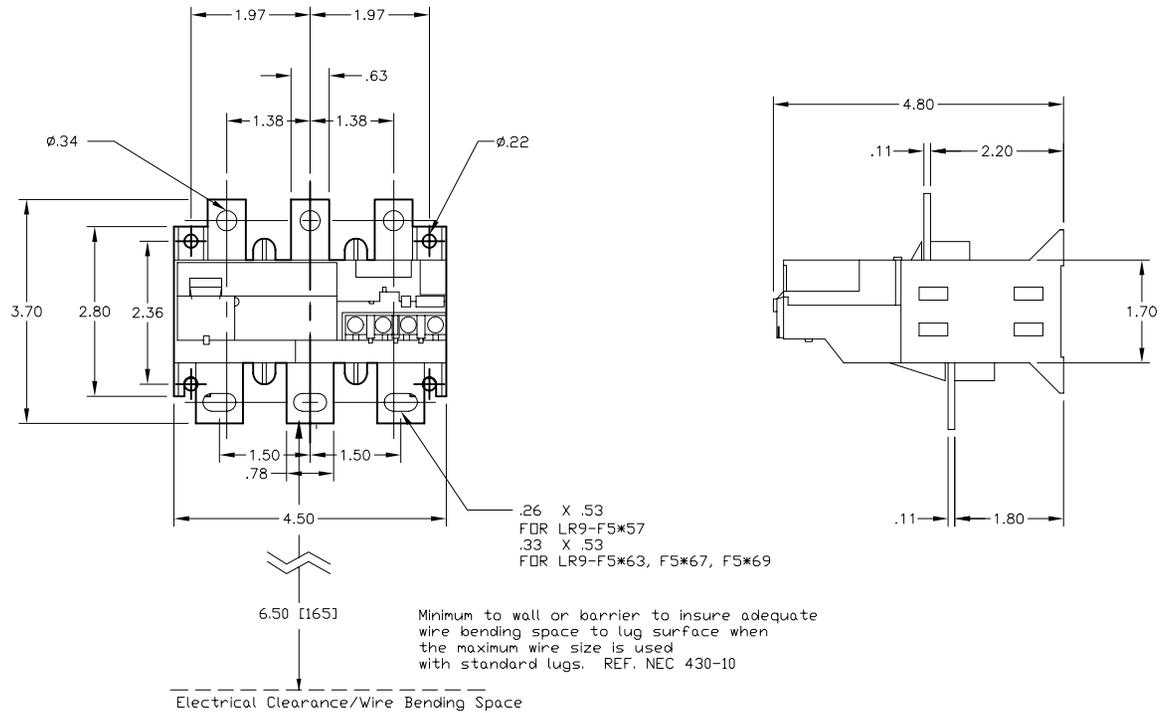

Catalog Number: LR9-D5(1)
 Ratings: SEE CHART
 UL File/CCN:
 CSA File/Class:
 Meets Standards: IEC 947-1, 255-8, 255-17 AND VDE 0060 EN 60947-1, 60947-4-1
 Weight:
 Wire Size: SEE CHART
 Terminal torque: SEE CHART
 Mounting Hwd: 35mm DIN rail, #10 screws

"THE SQUARE D COMPANY HAS PROPRIETARY RIGHTS TO THE INFORMATION CONTAINED HEREON. THIS INFORMATION REMAINS THE PROPERTY OF SQUARE D COMPANY AND MAY BE USED ONLY IN CONFORMANCE WITH INSTRUCTIONS ISSUED BY SQUARE D COMPANY. USER SHOULD VERIFY DRAWINGS ARE TO THE LATEST/CURRENT REVISION PRIOR TO INCORPORATING IN A DESIGN FILE."

DO NOT SCALE DRAWING
 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

THIRD ANGLE PROJECTION
 TOLERANCES
 UNLESS OTHERWISE SPECIFIED
 2 PLACE DECIMALS ± .01

IEC OVERLOAD RELAY (F-LINE)
 LR9-D5(1)

SQUARE D COMPANY

DWG# E0203901-01
 NO.