

# network switch, Modicon Networking, managed, 16 ports for copper with 4Gigabit SFP

MCSESM203F4LG0

## Main

Range of product	Modicon Networking	
Product or component type	Ethernet TCP/IP managed switch	
Communication port protocol	Ethernet TCP/IP SSH HTTP HTTPS SNMP RS232 SFTP SCP LLDP Telnet SNTP	
Port Ethernet	10/100BASE-TX - 16 port(s) copper cable 100/1000 SFP - 4 port(s)	
Maximum number of switches in cascade	Unlimited	
Cybersecurity	Port hardening IP-based port security MAC-based port security Port-based access control Role-based access control RADIUS assignment HTTPS DoS prevention VLAN-based ACL Audit trail SNMP logging Pre-login banner	

## Complementary

Integrated connection type	Shielded RJ45 copper cable SFP port fiber optic (Gbit)	
Transmission support medium	Twisted shielded pairs cable CAT 5E for copper cable Fiber optic cable for fiber optic (Gbit)	
Maximum cable distance between devices	100 m copper cable	
Ethernet service	Configuration via web server VLAN Multicast filtering Data stream control IGMP Snooping SNMP-Traps and SYSLOG	
Communication service	TFTP Quality of Service (QoS) Port monitoring Port mirroring Address conflict detection	

Diagnostics run time	Signal contact	
	Self test	
	MAC notification	
Maximum number of switches in a	a 50	
ring		
Redundancy	HiPER ring	
	RSTP	
	Link aggregation	
	Link backup Redundant network coupling	
	MRP	
[Us] rated supply voltage	1224 V	
Supply voltage limits	9.632 V DC SELV	
Power consumption in W	15 W	
Electrical connection	Removable connector 6 ways power supply	
Mounting support	35 mm symmetrical DIN rail	
Marking	CE	
-	CULus	
	RCM	
Function available	Security status	
	Alarms (Traps)	
	System information	
	Report	
Local signalling	1 dual colour LED (green/yellow) for P1 P2 power supplies	
	1 dual colour LED (green/red) for device status	
	1 dual colour LED (green/yellow) for memory key status	
	1 dual colour LED (green/yellow) for channel diagnostic	
Alarm output	1 voltfree contact 1 A	
Alarm function	Power supply fault	
	Data link status	
	Switch fault	
	Temperature threshold Redundancy ring fault	
	Incorrect configuration	
	External memory removed	
Ethernet cabling system	TF switches	
Width	108.8 mm	
Height	142.8 mm	
Depth	117.6 mm	
Net weight	0.95 kg	
Environment		
Ambient air temperature for operation	000 °C	
Relative humidity	195 % non-condensing	
IP degree of protection	IP30	
Directives	2014/35/EU - low voltage directive	
	2014/30/EU - electromagnetic compatibility	
Standards	UL 61010-2-201	
	EN/IEC 61131-2	
	EN/IEC 62368-1	
	IEC 61850-3	
	IFC 62443-4-2	

IEC 62443-4-2

Product certifications

CE
UL
RCM
DNV
ATEX
EAC
UKCA
CSA C22-2 No 213
UKEX

# **Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	22.000 cm
Package 1 Width	22.800 cm
Package 1 Length	23.100 cm
Package 1 Weight	1.332 kg
Unit Type of Package 2	S04
Number of Units in Package 2	2
Package 2 Height	30.000 cm
Package 2 Width	40.000 cm
Package 2 Length	60.000 cm
Package 2 Weight	3.551 kg
Unit Type of Package 3	P12
Number of Units in Package 3	24
Package 3 Height	103.000 cm
Package 3 Width	80.000 cm
Package 3 Length	120.000 cm
Package 3 Weight	53.612 kg

# **Contractual warranty**

Warranty 18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

#### Environmental Data explained >

How we assess product sustainability >

### Environmental footprint

Environmental Disclosure

Product Environmental Profile

#### **Use Better**

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACh Regulation	REACh Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

#### **Use Again**

○ Repack and remanufacture	
End of life manual availability	End of Life Information
Take-back	No

## **Product data sheet**

## MCSESM203F4LG0

### **Dimensions Drawings**

#### **Dimensions**

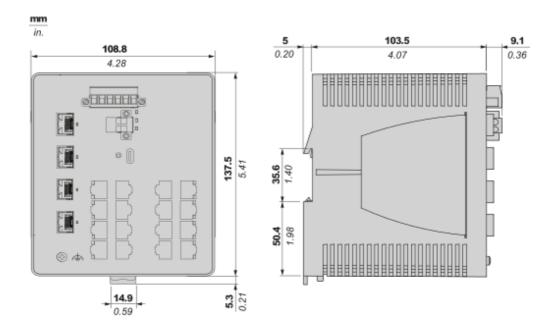


Image of product / Alternate images

### **Alternative**











