

Product data sheet

Specifications



network switch, Modicon Networking, managed, 20 ports for copper with 4Gigabit SFP

MCSESM243F4LG0

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Modicon Networking
Product or Component Type	Ethernet TCP/IP managed switch
Communication Port Protocol	Ethernet TCP/IP SSH HTTP HTTPS SNMP RS232 SFTP SCP LLDP Telnet SNTP
Port Ethernet	10/100BASE-TX - 20 copper cable 100/1000 SFP - 4
Maximum number of switches in cascade	Unlimited
Cybersecurity	Port hardening IP-based port security MAC-based port security Port-based access control Role-based access control RADIUS assignment HTTPS DoS prevention VLAN-based ACL Audit trail SNMP logging Pre-login banner

Complementary

Integrated connection type	Shielded RJ45 copper cable SFP port fiber optic (Gbit)
Transmission support medium	Twisted shielded pairs cable CAT 5E copper cable Fiber optic cable fiber optic (Gbit)
Maximum cable distance between devices	328.08 ft (100 m) copper cable
Ethernet service	Configuration via web server VLAN Multicast filtering Data stream control IGMP Snooping SNMP-Traps and SYSLOG
Communication Service	TFTP Quality of Service (QoS) Port monitoring Port mirroring Address conflict detection

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Diagnostics run time	Signal contact Self test MAC notification
Maximum number of switches in a ring	50
Redundancy	HiPER ring RSTP Link aggregation Link backup Redundant network coupling MRP
[Us] rated supply voltage	12...24 V
Supply voltage limits	9.6...32 V DC SELV
Power Consumption in W	16 W
Electrical connection	Removable connector 6 ways power supply
Mounting Support	35 mm symmetrical DIN rail
Marking	CE CULus RCM
Function Available	Security status Alarms (Traps) System information Report
Local signalling	1 dual colour LED (green/yellow) for P1 P2 power supplies 1 dual colour LED (green/red) for device status 1 dual colour LED (green/yellow) for memory key status 1 dual colour LED (green/yellow) for channel diagnostic
Alarm output	1 voltfree contact 1 A
Alarm function	Power supply fault Data link status Switch fault Temperature threshold Redundancy ring fault Incorrect configuration External memory removed
Ethernet cabling system	TF switches
Width	4.3 in (108.8 mm)
Height	5.6 in (142.8 mm)
Depth	4.6 in (117.6 mm)
Net Weight	2.31 lb(US) (1.05 kg)

Environment

Ambient Air Temperature for Operation	32...140 °F (0...60 °C)
Relative Humidity	1...95 % non-condensing
IP Degree of Protection	IP30
Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility
Standards	UL 61010-2-201 EN/IEC 61131-2 EN/IEC 62368-1 IEC 61850-3 IEC 62443-4-2

Product certifications	CE UL RCM DNV ATEX EAC UKCA CSA C22-2 No 213 UKEX
-------------------------------	---------------------------------------------------------------------------

Ordering and shipping details

Category	US1PC1118121
Discount Schedule	PC11
GTIN	3606481463487
Returnability	Yes
Country of origin	DE

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	8.661 in (22.000 cm)
Package 1 Width	8.858 in (22.500 cm)
Package 1 Length	9.055 in (23.000 cm)
Package weight(Lbs)	2.985 lb(US) (1.354 kg)
Unit Type of Package 2	S04
Number of Units in Package 2	2
Package 2 Height	11.811 in (30.000 cm)
Package 2 Width	15.748 in (40.000 cm)
Package 2 Length	23.622 in (60.000 cm)
Package 2 Weight	8.047 lb(US) (3.650 kg)
Unit Type of Package 3	P12
Number of Units in Package 3	8
Package 3 Height	17.717 in (45.000 cm)
Package 3 Width	31.496 in (80.000 cm)
Package 3 Length	47.244 in (120.000 cm)
Package 3 Weight	46.297 lb(US) (21.000 kg)

Contractual warranty

Warranty	18 months
-----------------	-----------



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

No

[EU RoHS Directive](#)

Pro-active compliance (Product out of EU RoHS legal scope)

REACH Regulation

[REACH Declaration](#)

California proposition 65

WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

Repack and remanufacture

[Circularity Profile](#)

[End of Life Information](#)

Take-back

No

Dimensions Drawings

Dimensions

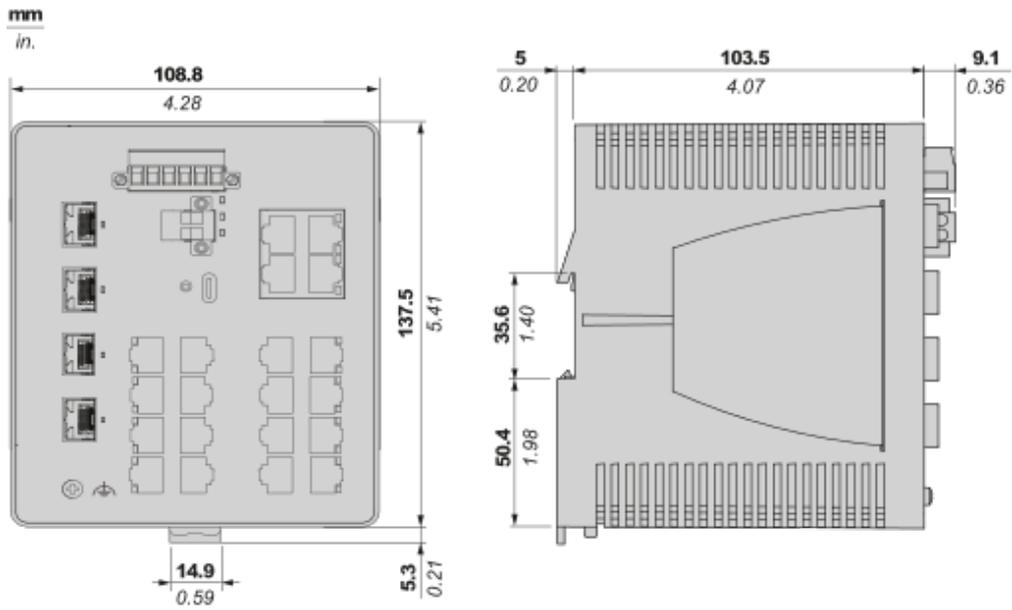


Image of product / Alternate images

Alternative





