

Product data sheet

Specifications



ABS industrial box, PanelSeT TBS,
89x54x89mm, int. 80x47x80mm, low
plain cover, IP66, IK07, RAL 7035

NSYTBS885

**Product availability: Non-Stock - Not normally stocked in
distribution facility**

Main

Range	PanelSeT
Device Application	Multi-purpose
Category	Industrial box
Height	3.5 in (89 mm)
Width	3.5 in (89 mm)
Depth	2.1 in (54 mm)
Internal height	3.1 in (80 mm)
Internal width	3.1 in (80 mm)
Internal depth	1.9 in (47 mm)
Enclosure mounting	Wall mounted
Device composition	1 body 1 cover 4 cover screw
Quantity per Set	Set of 5
Body type	One piece moulded
Type of front cover	Low plain cover
Cover fixing	Metal screws
Lock type	Captive screw flat outside sealed area
Removable parts	Cover by captive screws

Complementary

Material	ABS with 45% of post-industrial recycled content
color	Gray RAL 7035)
Standards	IEC 62208
Product Certifications	TÜV
Electrical Insulation Class	Class II
IP degree of protection	IP66 conforming to NEMA 4.4X
IK degree of protection	IK07 conforming to IEC 62262
Glow wire resistance	1202 °F (650 °C) IEC 60695-2-11
Ambient Air Temperature for Storage	5...104 °F (-15...40 °C)
Operating temperature	-13...140 °F (-25...60 °C)
Net Weight	0.212 lb(US) (0.096 kg)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Ordering and shipping details

Category	US10ES180033
Discount Schedule	0ES1
GTIN	3606480165214
Returnability	No
Country of origin	HU

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.126 in (5.400 cm)
Package 1 Width	3.504 in (8.900 cm)
Package 1 Length	3.504 in (8.900 cm)
Package weight(Lbs)	3.316 oz (94.000 g)
Unit Type of Package 2	CAR
Number of Units in Package 2	160
Package 2 Height	15.748 in (40.000 cm)
Package 2 Width	15.945 in (40.500 cm)
Package 2 Length	23.819 in (60.500 cm)
Package 2 Weight	36.068 lb(US) (16.360 kg)
Unit Type of Package 3	P12
Number of Units in Package 3	1920
Package 3 Height	52.953 in (134.500 cm)
Package 3 Width	31.496 in (80.000 cm)
Package 3 Length	47.244 in (120.000 cm)
Package 3 Weight	456.357 lb(US) (207.000 kg)

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)	1
------------------------------------------------	---

Environmental Disclosure	Product Environmental Profile
--------------------------	-----------------------------------------------

Use Better

Materials and Substances

Average percentage of recycled plastic content	45 %
------------------------------------------------	------

Packaging made with recycled cardboard	No
----------------------------------------	----

Packaging without single use plastic	No
--------------------------------------	----

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
-----------------------------------	------------------------------------------------------------

REACH Regulation	REACH Declaration
------------------	-----------------------------------

Use Again

Repack and remanufacture

Circularity Profile	No need of specific recycling operations
---------------------	------------------------------------------

Take-back	No
-----------	----

Technical Illustration

Dimensions

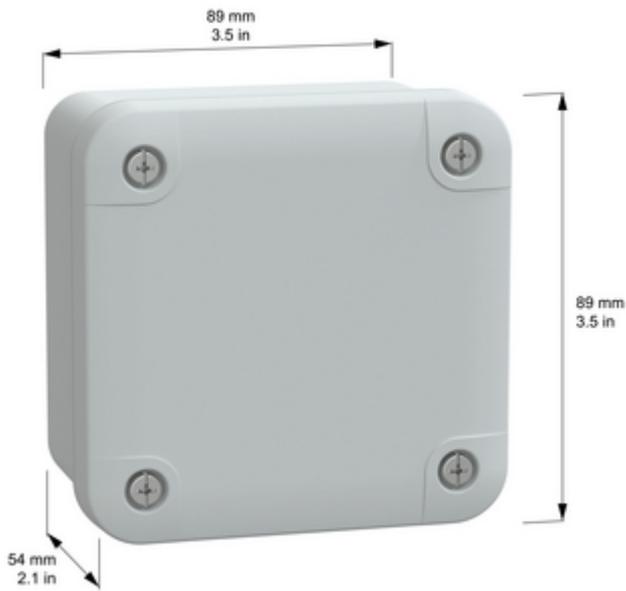


Image of product / Alternate images

Alternative

