

Product data sheet

Specifications



Analog Input Module + Base, 4 In, Current, Voltage, 2 Wires, Modicon Edge I/O NTS

NTSAMI0400K

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range of Product	Modicon Edge I/O NTS
Product or Component Type	Analog input module kit
Kit composition	NTSAMI0400 module NTSXBA0100H base
Mandatory accessory	NTSXTB12_0_H terminal block
Product Compatibility	NTSN.....
Range Compatibility	Logic/motion controller - Modicon M262 Modicon M580 Third party
Device Application	Industrial Application
Analogue input number	4
Operating Mode	Isochronous/Asynchronous

Complementary

Analogue input type	Current +/- 20 mA Current 0...20 mA Current 4...20 mA Voltage +/- 10 V Voltage 0...10 V Voltage +/- 5 V Voltage 0...5 V Voltage 1...5 V
Input wiring mode	2 wires
Analogue input resolution	15 bits + sign
Permitted overload on inputs	30 V maximum voltage 30 V at 50 mA maximum current
Input impedance	> 10 MOhm in voltage mode 100 Ohm + internal current protector 10 Ohm typical
Sampling duration	0.980 ms per module
Input protection type	Over current / miswiring protection per channel for current input Over voltage / miswiring protection per channel for voltage input
Input diagnostic	Underflow error per channel Overflow error per channel Broken wire error per channel Hardware error per channel

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

LSB value	0.31 mV, +/- 10 V 0.31 mV, 0...10 V 0.16 mV, +/- 5 V 0.16 mV, 0...5 V 0.13 mV, 1...5 V 0.61 µA, +/- 20 mA 0.61 µA, 0...2 mA 0.49 µA, 4...20 mA
Type of Cable	Shielded cable
Temperature drift	± 0.0057 % FS/ °C
Measurement error	<= 0.3 % FS 25 °C <= 0.5 % FS - 20...60 °C
Non-linearity	<= 0.01 % FS voltage/current
EMI/RFI Noise rejection (100 kHz to 10 MHz)	90 dB
Power supply type	Bus power from power supply bus (24 Vdc) Field power from power supply field (24 Vdc)
Rated operational voltage limits	20.4...28.8 V DC
Typical current consumption	31.7 mA 24 V DC on the Bus current 19.2 mA 24 V DC on the internal field current minimum 23 mA 24 V DC on the internal field current maximum
Power dissipation in W	1.6 W maximum at 24 V DC
Maximum cable distance between devices	Shielded cable <656.2 ft (200 m) voltage inputs Shielded cable <3280.8 ft (1000 m) current input
Isolation between channels and bus	1500 V AC
Isolation between channels and field pwr	No
Isolation between field power and bus	1500 V AC
Hot swapping fallback	Yes
Local signalling	1 LED green module operating (RUN) 1 LED per channel green channel diagnostic 1 LED red module error (ERR)
Housing Colour	Grey
Mounting support	Top hat type TH35-7.5 rail IEC 60715 Top hat type TH35-15 rail IEC 60715
Height	3.9 in (100 mm)
Width	0.6 in (15 mm)
Depth	3.1 in (80 mm)
Product Weight	0.161 lb(US) (0.073 kg)

Environment

IP Degree of Protection	IP20
Marking	CE UKCA CULus RCM
Product certifications	CE UKCA CULus RCM Merchant Navy - EU RO MR (pending) EAC (pending) ATEX Zone 2 (pending) IECEX zone 2 (pending) CCC Ex zone 2 (pending)

Standards	EN/IEC 61131-2 EN 61010-2-201 UL 61010-2-201 IACS E10 EN/IEC 61000-6-5 EN/IEC 61850-3 EN/IEC 60079-0 EN 50155 EN 50121-4 EN 50121-5
Directives	2014/30/EU - electromagnetic compatibility 2014/34/EU - ATEX directive 2014/35/EU
Ambient air temperature for operation	-4...140 °F (-20...60 °C)
Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Relative humidity	5...95 % without condensation
Operating altitude	0...6561.68 ft (0...2000 m) 2000...5000 m with derating
pollution degree	2
Vibration resistance	1 g without accessory 2 g with accessory
Shock resistance	15 g 11 ms with and without accessory)

Ordering and shipping details

Category	US1PC3318213
Discount Schedule	PC33
GTIN	3606486877357
Returnability	No
Country of origin	ID

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.18 in (3.000 cm)
Package 1 Width	3.54 in (9.000 cm)
Package 1 Length	4.72 in (12.000 cm)
Package 1 Weight	3.492 oz (99.000 g)
Unit Type of Package 2	S01
Number of Units in Package 2	16
Package 2 Height	5.91 in (15.000 cm)
Package 2 Width	5.91 in (15.000 cm)
Package 2 Length	15.75 in (40.000 cm)
Package 2 Weight	4.120 lb(US) (1.869 kg)

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

 Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	24
Environmental Disclosure	Product Environmental Profile

Use Better


 Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

 Repack and remanufacture	
Circularity Profile	End of Life Information
Take-back	No
WEEE	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.


Dimensions Drawings

Dimensions

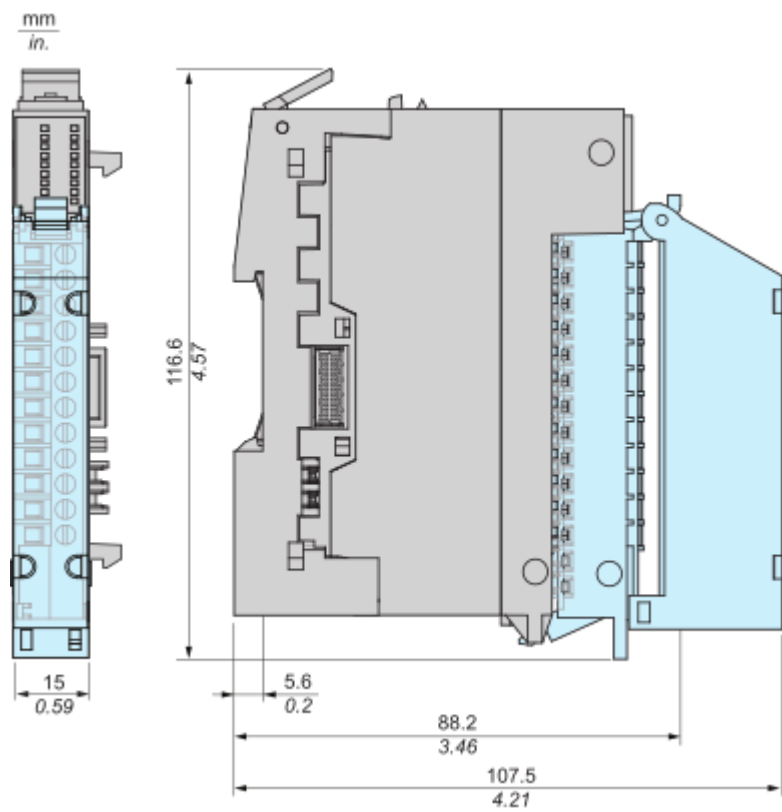

Mounting and Clearance


Minimum clearances

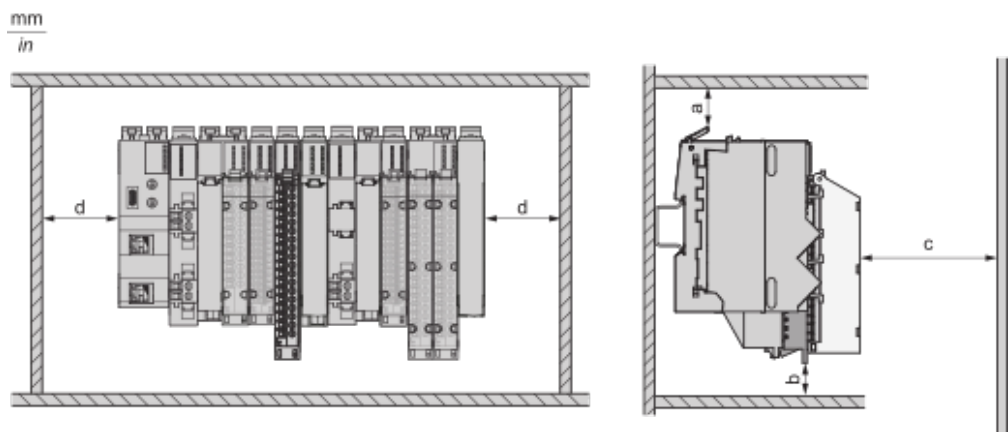

a : 50 mm (1.97 in) **b** : Without EMC kit: 25 mm (0.98 in), with EMC 55 kit: 55 mm (2.16 in) **c** : 80 mm (3.15 in) **d** : 25 mm (0.98 in)


Connections and Schema

Wiring

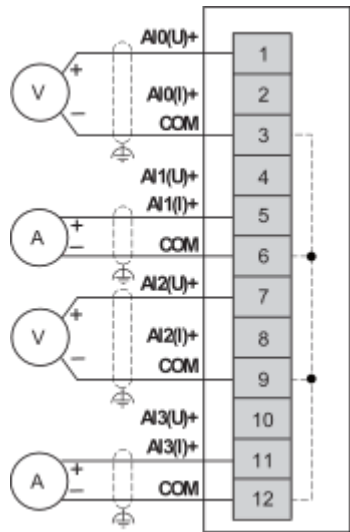

Technical Illustration

Dimensions

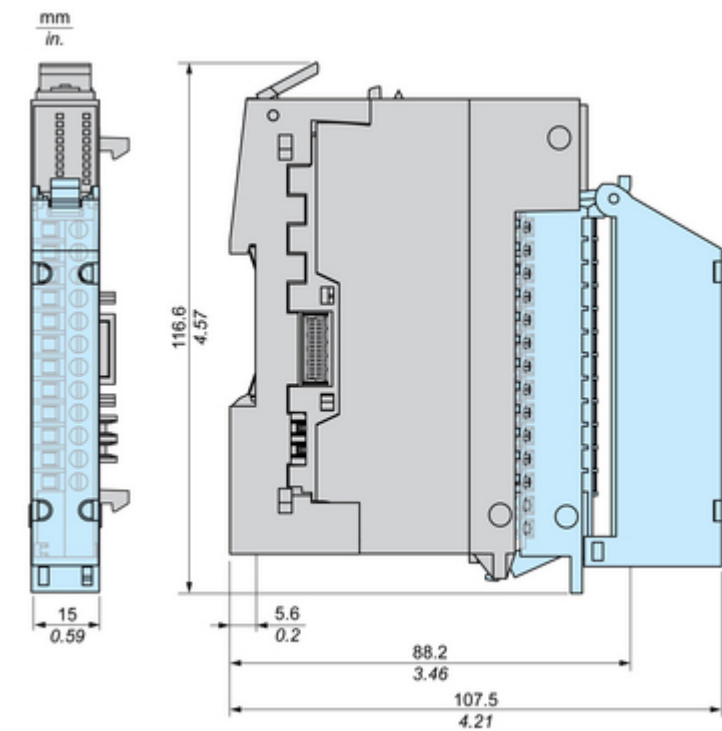

Technical Illustration

Wiring diagram

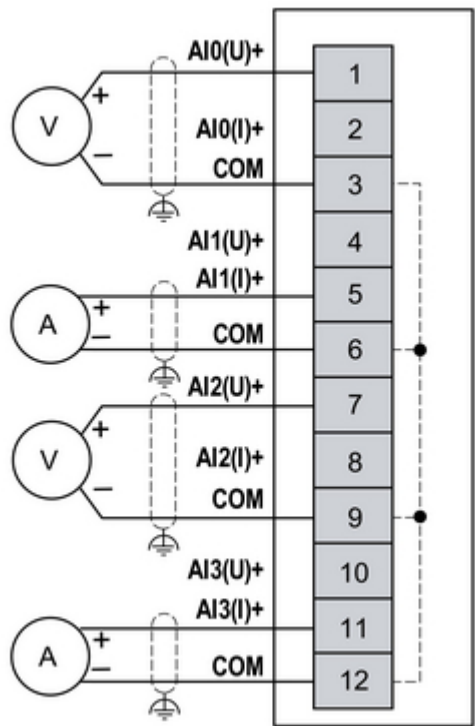


Image of product / Alternate images

Alternative





