

Product data sheet

Specifications



Network Interface Module + Base + Termination, EtherNet/IP, Modbus TCP, 100Mbps, 2 RJ45, Hardened, Modicon Edge I/O NTS

NTSNEC1200HK

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range of Product	Modicon Edge I/O NTS
Product or Component Type	Network interface module
Kit composition	NTSNEC1200 NIM NTSXBA0301H base NTSXMP0000H termination
Range Compatibility	Logic/motion controller - Modicon M262 Modicon M580 Modicon m241 & m251 (pending) Soft dPAC (pending) Third party

Complementary

Integrated connection type	Ethernet/IP Modbus TCP USB 2.0 port
Connector type	2 RJ45 switched ethernet isolated ports USB type C 1
Exchange mode	Full duplex Autonegotiation
Transmission Rate	10/100 Mbit/s
Topology	Daisy chain Star Ring (using rstp)
Web server	Embedded

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Communication Service	Secure boot Secure storage (via TPM) SCEP client (pending) CAE Support Secure syslog server (pending) TLS 1.2 Embedded TPM DPWS (IPv6) Configuration Web server FDR client BOOTP DHCP client IPv4 EtherNet/IP Server Modbus TCP server OPCUA server (explicit only) SNMP (pending) Crashlog NTP v4 RSTP support Static VLAN configuration Quality of Service (QoS) USB RNDIS
Number of addressable I/O module	32 modules
Local signalling	1 LED (green) for RUN 1 LED (red) for ERR 1 LED (green/red) for I/O 1 LED (green/red) for MS 1 LED (green/red) for NS 1 LED (green/red) for cyber security (SEC)
Height	3.9 in (100 mm)
Width	1.8 in (45 mm)
Depth	3.3 in (84 mm)
Product Weight	0.681 lb(US) (0.309 kg)

Environment

IP Degree of Protection	IP20
Protective treatment	Conformal coating
Marking	CE UKCA CULus RCM
Directives	2014/35/EU - directive basse tension 2014/30/EU - electromagnetic compatibility 2014/34/EU - ATEX directive
Ambient air temperature for operation	-40...158 °F (-40...70 °C)
Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Relative humidity	5...95 % without condensation
Operating altitude	0...6561.68 ft (0...2000 m) without derating 2000 m...5000 m with derating
pollution degree	2

Ordering and shipping details

Category	US1PC3318214
Discount Schedule	PC33
GTIN	3606486878033

Returnability	No
Country of origin	ID

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.53 in (11.500 cm)
Package 1 Width	4.53 in (11.500 cm)
Package 1 Length	5.31 in (13.500 cm)
Package 1 Weight	13.792 oz (391.000 g)
Unit Type of Package 2	S02
Number of Units in Package 2	6
Package 2 Height	5.91 in (15.000 cm)
Package 2 Width	11.81 in (30.000 cm)
Package 2 Length	15.75 in (40.000 cm)
Package 2 Weight	6.281 lb(US) (2.849 kg)

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	122
Environmental Disclosure	Product Environmental Profile

Use Better


Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

Repack and remanufacture	
Circularity Profile	End of Life Information
Take-back	No
WEEE	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.


Dimensions Drawings

Dimensions

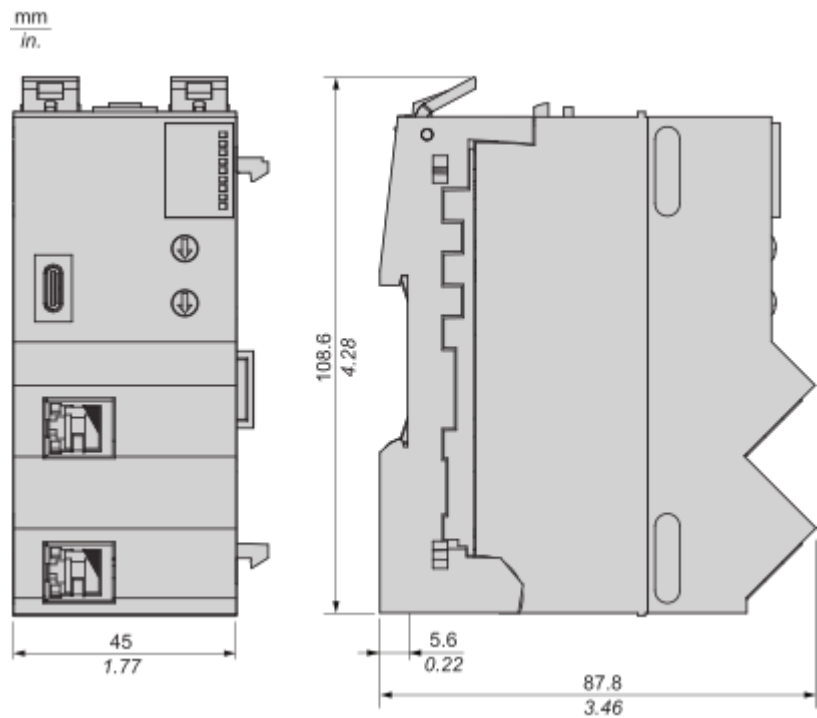

Mounting and Clearance

Minimum clearances

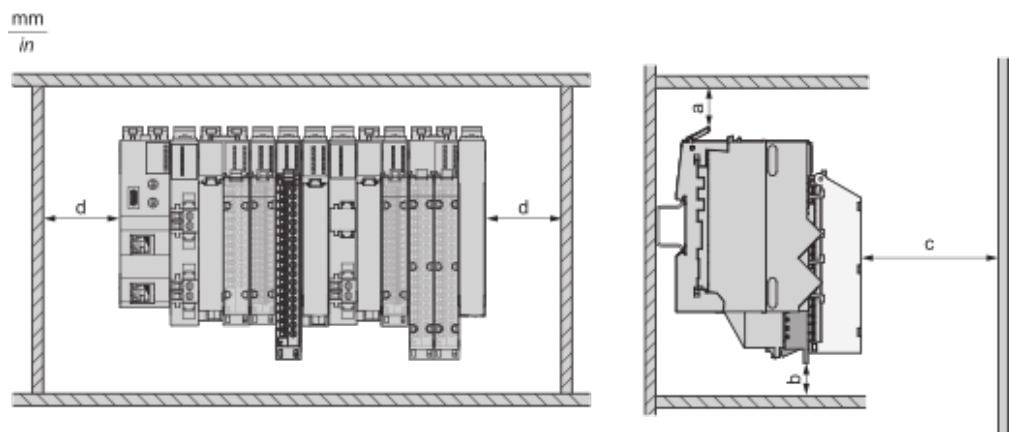

a : 50 mm (1.97 in) **b** : Without EMC kit: 25 mm (0.98 in), with EMC 55 kit: 55 mm (2.16 in) **c** : 80 mm (3.15 in) **d** : 25 mm (0.98 in)

Technical Illustration

Dimensions

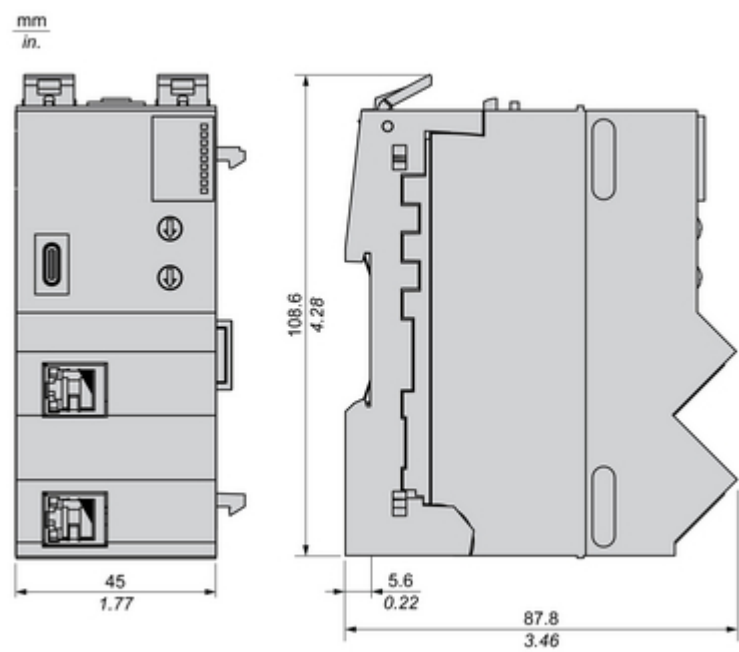


Image of product / Alternate images

Alternative











