

Product data sheet

Specifications



Spare Cluster Termination, Hardened, Modicon Edge I/O NTS

NTSXMP0000H

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Modicon Edge I/O NTS
Accessory / separate part category	Connection accessories
Product or Component Type	Cluster termination
Accessory / separate part designation	Cluster termination
Accessory / separate part destination	Cluster
Quantity per Set	Set of 1
Height	3.9 in (100 mm)
Width	0.6 in (15 mm)
Product Weight	0.086 lb(US) (0.039 kg)
Accessory / Separate Part Type	Cluster termination

Complementary

Product Compatibility	NTSN.....
Color	Gray

Environment

IP Degree of Protection	IP20
Protective treatment	Conformal coating
Marking	CE UKCA CULus RCM
Product certifications	CE UKCA CULus RCM Merchant Navy - EU RO MR (pending) EAC (pending) ATEX Zone 2 (pending) IECEX zone 2 (pending) CCC Ex zone 2 (pending)

Standards	EN/IEC 61131-2 EN 61010-2-201 UL 61010-2-201 IACS E10 EN/IEC 61000-6-5, interface type 1 & type 2 EN/IEC 61850-3, location G EN/IEC 60079-0 EN 50155 EN 50121-4 EN 50121-5
-----------	---

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Directives	2014/30/EU - electromagnetic compatibility 2014/34/EU - ATEX directive 2014/35/EU
Ambient air temperature for operation	-40...158 °F (-40...70 °C)
Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Relative humidity	5...95 % without condensation
Operating altitude	0...6561.68 ft (0...2000 m) without derating 2000 m...5000 m with derating
Pollution degree	2
Vibration resistance	1 g without accessory 2 g with accessory
Shock resistance	15 g 11 ms with and without accessory)

Ordering and shipping details

Category	US1PC3318214
Discount Schedule	PC33
GTIN	3606486877289
Returnability	Yes
Country of origin	ID

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.300 in (3.302 cm)
Package 1 Width	3.300 in (8.382 cm)
Package 1 Length	4.700 in (11.938 cm)
Package weight(Lbs)	2.240 oz (63.503 g)

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	0.5 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	0.3 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.1 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	0 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.1 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

Recyclability potential, in %	0
Circularity Profile	End of Life Information
Take-back	No


Dimensions Drawings

Dimensions

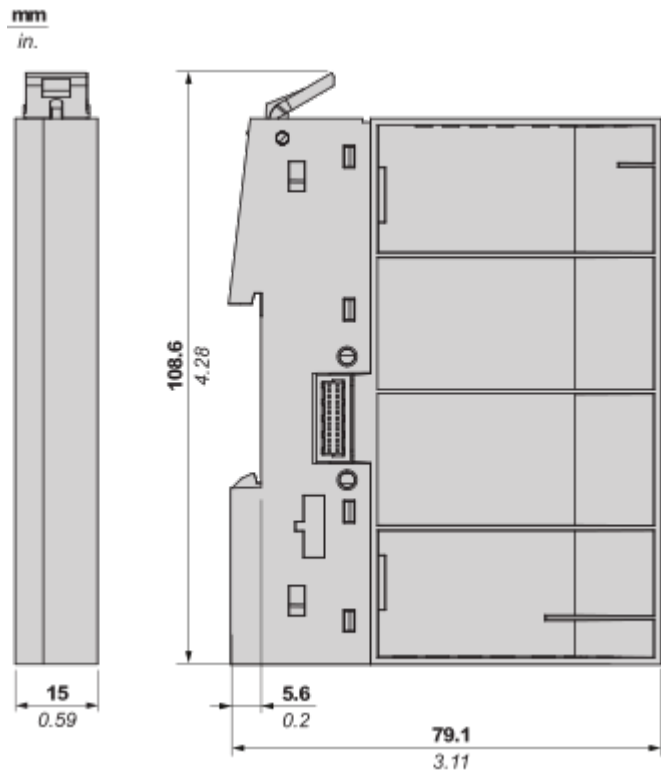

Mounting and Clearance

Minimum clearances

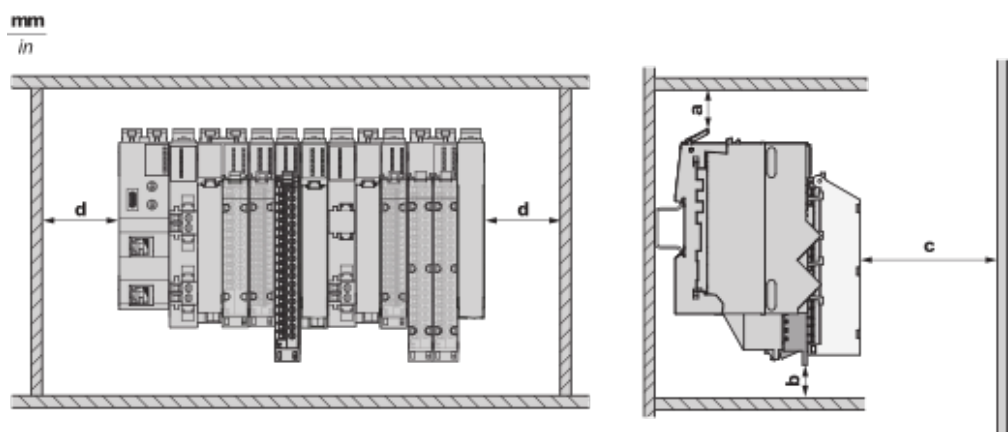

a : 50 mm (1.97 in) **b** : Without EMC kit: 25 mm (0.98 in), with EMC 55 kit: 55 mm (2.16 in) **c** : 80 mm (3.15 in) **d** : 25 mm (0.98 in)

Technical Illustration

Dimensions

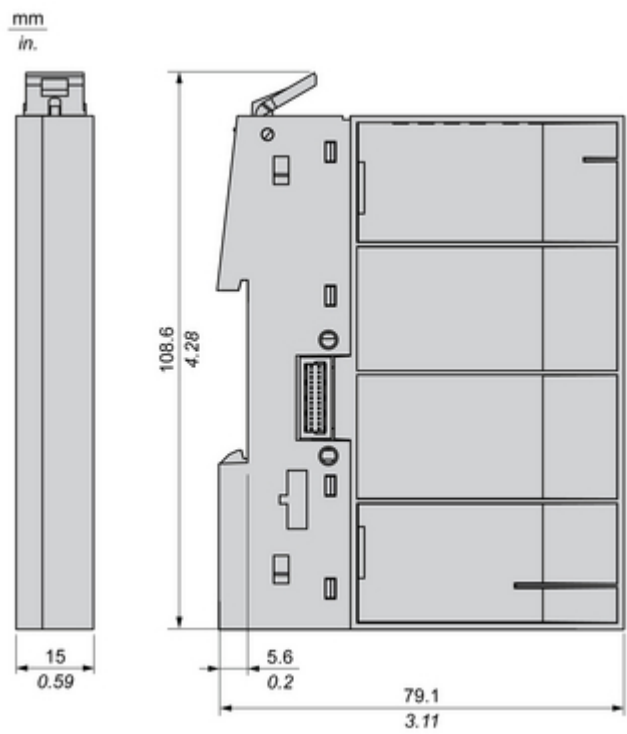


Image of product / Alternate images

Alternative

