

Product data sheet

Specifications



power relay, Harmony
Electromechanical Relays, DIN rail
or panel mount relay, 30A, 2CO,
without LED, without lockable test
button, 24V AC

RPF2BB7

Main

Range of product	Harmony Electromechanical Relays
Series name	RPF series
Product or component type	DIN rail/panel mount relay
Contacts type and composition	2 C/O
Relay type	Power relay
[Uc] control circuit voltage	24 V AC 50/60 Hz
status LED	Without
Control type	Without lockable test button
[Ithe] conventional enclosed thermal current	25 A at -40...55 °C relays side by side without a gap 30 A at -40...55 °C 13 mm gap between two relays

Complementary

Control circuit voltage limits	19.2...26.4 V
[Ie] rated operational current	30 A at 277 V (AC) NO conforming to UL 20 A at 28 V (DC) NO conforming to UL 30 A at 250 V (AC) NO conforming to IEC 25 A at 28 V (DC) NO conforming to IEC 3 A at 277 V (AC) NC conforming to UL 3 A at 28 V (DC) NC conforming to UL 3 A at 250 V (AC) NC conforming to IEC 3 A at 28 V (DC) NC conforming to IEC
Average consumption	4 VA at 60 Hz
CAD overall width	33.7 mm
CAD overall height	68.5 mm
CAD overall depth	39.2 mm
Compatibility code	RPF
[Ui] rated insulation voltage	250 V conforming to IEC 300 V conforming to UL
Maximum switching voltage	250 V conforming to IEC
Drop-out voltage threshold	>= 0.15 Uc
minimum switching current	500 mA
Maximum switching capacity	7500 VA/700 W
Average resistance	170 Ohm at 20 °C +/- 15 %
Mechanical durability	5000000 cycles
Electrical durability	100000 cycles for resistive load

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Safety reliability data	B10d = 100000
Operating rate	<= 1200 cycles/hour under load <= 18000 cycles/hour no-load
Utilisation coefficient	10 %
Dielectric strength	2000 V AC between poles with basic 4000 V AC between coil and contact with reinforced 1500 V AC between contacts with micro disconnection
[Uimp] rated impulse withstand voltage	4 kV during 1.2/50 µs
Protection category	RT II
Pollution degree	3
Mounting support	DIN rail Panel
Operating position	Any position
Test levels	Level A group mounting
Device presentation	Complete product
Contacts material	Silver tin oxide
Shape of pin	Flat (faston type)
Net weight	0.082 kg

Environment

Ambient air temperature for operation	-40...55 °C
IP degree of protection	IP40 conforming to IEC 60529
Standards	UL 508 IEC 61810-1 CSA C22.2 No 14
Product certifications	UL CE GOST CSA
Ambient air temperature for storage	-40...85 °C
Vibration resistance	3 gn, amplitude = +/- 1 mm (f = 10...150 Hz)5 cycles in operation 10 gn, amplitude = +/- 1 mm (f = 10...150 Hz)5 cycles not operating
Shock resistance	10 gn for in operation 30 gn for not operating

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.500 cm
Package 1 Width	4.600 cm
Package 1 Length	7.000 cm
Package 1 Weight	88.000 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	5.400 cm
Package 2 Width	14.800 cm

Package 2 Length	20.000 cm
Package 2 Weight	957.000 g
Unit Type of Package 3	S02
Number of Units in Package 3	60
Package 3 Height	15.000 cm
Package 3 Width	30.000 cm
Package 3 Length	40.000 cm
Package 3 Weight	6.292 kg

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

 Environmental footprint	
Environmental Disclosure	Product Environmental Profile

Use Better


 Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

 Repack and remanufacture	
End of life manual availability	No need of specific recycling operations
Take-back	No


Dimensions Drawings

Dimensions

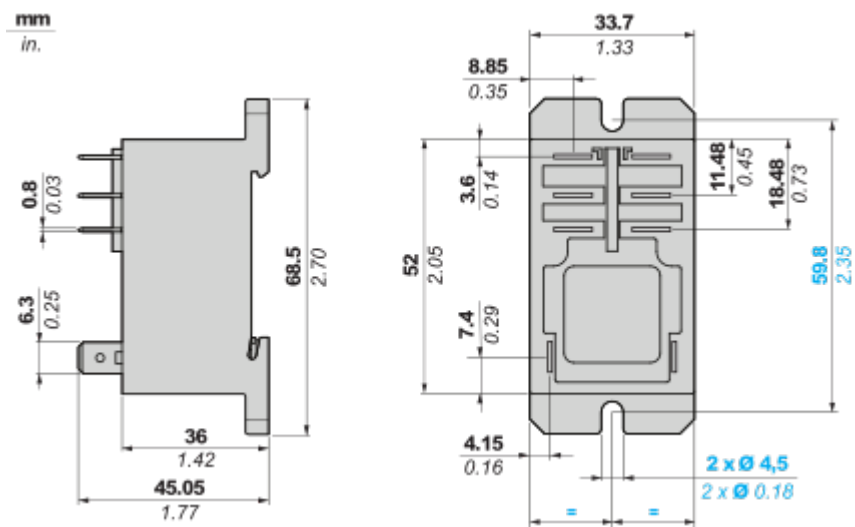

Connections and Schema

Wiring Diagram




Symbols shown in blue correspond to Nema marking.

Performance Curves

Electrical Durability of Contacts


AC Resistive load



X Switching capacity (kVA)
Y Durability (number of operating cycles)


AC Reduction coefficient for inductive load (depending on power factor cos φ)

Durability (inductive load) = durability (resistive load) x reduction coefficient.



Y reduction coefficient

Maximum switching capacity on DC resistive load



A 30 A

B 25 A

Note : These are typical curves, actual durability depends on load, environment, duty cycle, etc.

Technical Illustration

Dimensions

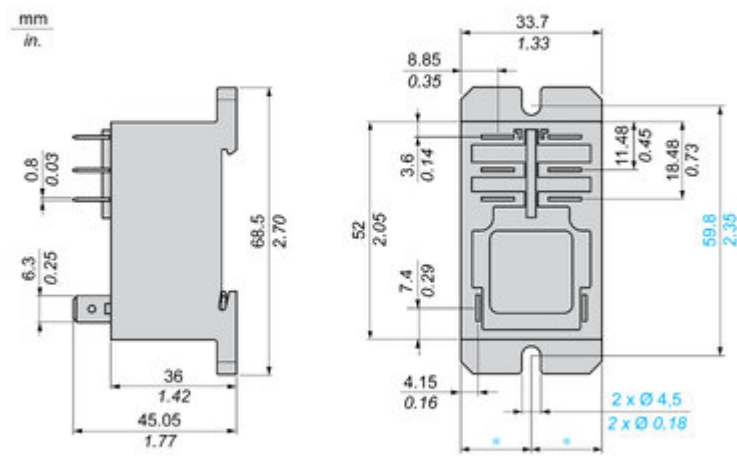


Image of product / Alternate images

Alternative







Image of product in real life situation

