


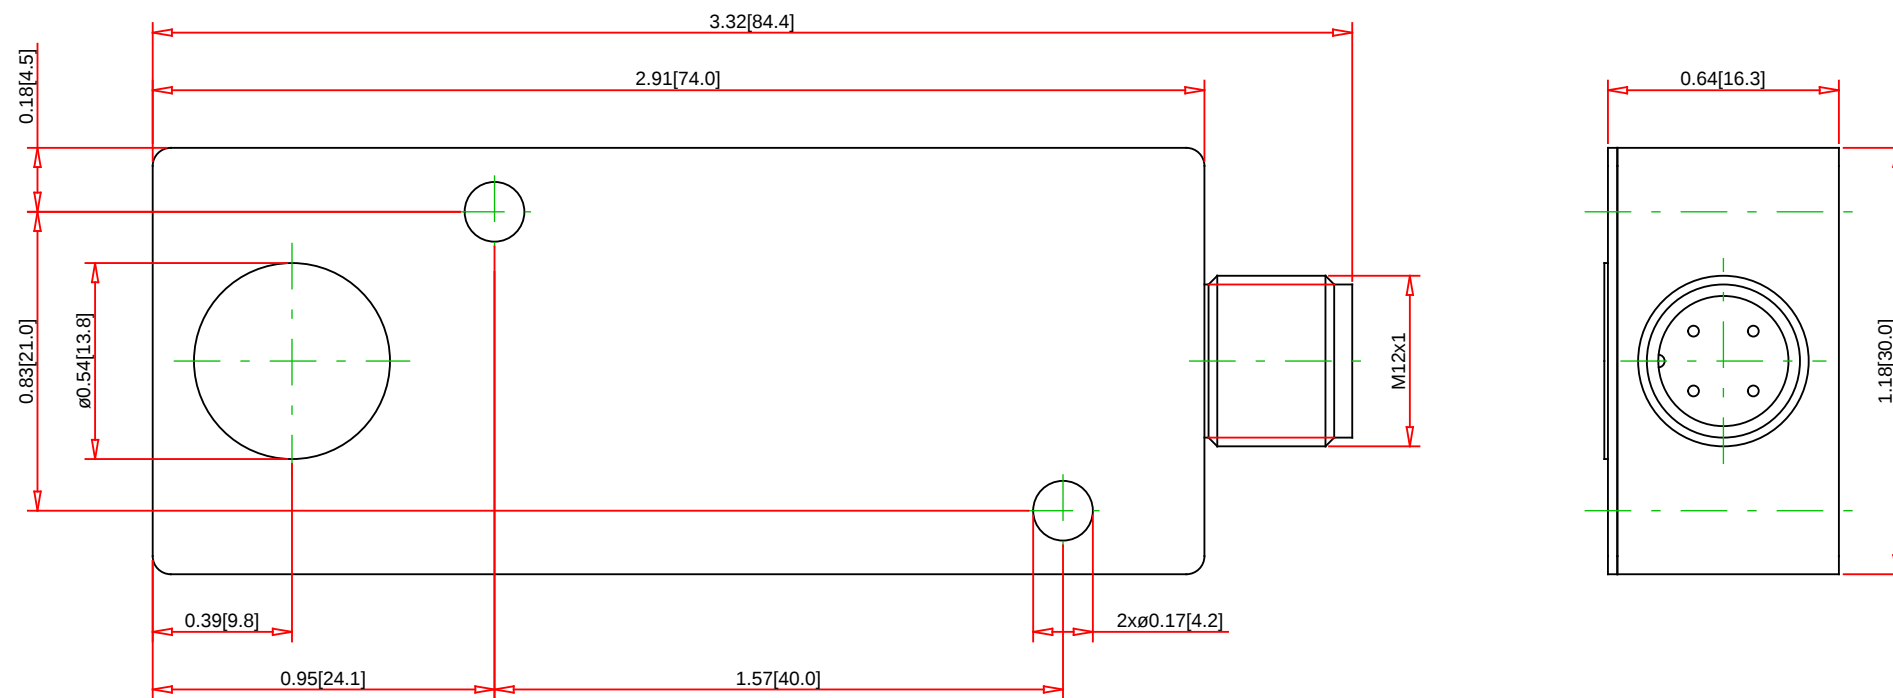

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
SC650AB00FP

 **Telemecanique**
Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Sensing Window: 254.0 mm (10.0 in)
Far Limit:
Sensing Range:
Circuit Type:
Output Mode: Discrete
Volts Type: DC
Voltage Range: 12-24 VDC
Max Load: 100 mA
Current Consumption: 60 mA
Sonic Frequency: 500 kHz
Temp Range: 0° to 60° C (32° to 140° F)
NEMA Type: 4X (indoor use only)
IP Rating: IP67
Standards: UL, CE Rohs

Specification:

Sensor Type: Ultrasonic Sensor
Description: Ultrasonic Sensor, Discrete, Flat Profile, 12-24 VDC
Body Style: Flat Profile
Diameter:
Housing Material: 0
Face Material: Silicone Rubber
Field Configurable: Yes, using AC441 Configurator and Superprox+ Software
Functionality: Configurable
Cable Size:
Connector Type: M12
Special Features: Flat profile