

Product data sheet

Specifications



Occupancy and humidity sensor, X Series, PIR, single pole, 1 way, white, matte finish

SQR73105WH

Product availability: Stock - Normally stocked in distribution facility

Main

Range	Square D X Series
Product or Component Type	Sensor
Device Application	Control
Device presentation	Mechanism with fixing frame
Aesthetic name	X Series
Number of gangs	1 gang
Number of poles	1

Complementary

Switch Function	1-way
Sensor Type	PIR Humidity sensor Light level sensor
[Ie] rated operational current AC	10 A
[Ue] rated operational voltage	120 V
Network type	AC
Network Frequency	60 Hz
Load type	Halogen 0...500 W Incandescent 0...500 W Dimmable LED 0...150 W Fan motor 2.5 A
Maximum Horse Power Rating	0.25 hp
Mounting Mode	By screws
Device mounting	Flush
Material	Plastic: strap Metal: fixing frame
Color	White
Surface Finish	Matte
Marking	LIGHT-FAN
Width	1.7 in (43 mm)
Height	4.06 in (103 mm)
Quantity per Set	1 piece

Environment

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Product Certifications	cULus ICES-003
Standards	UL 1917

Ordering and shipping details

Category	US10DE909933
Discount Schedule	0DE9
GTIN	785901549734
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.500 in (6.350 cm)
Package 1 Width	2.700 in (6.858 cm)
Package 1 Length	4.300 in (10.922 cm)
Package weight(Lbs)	6.240 oz (176.901 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	4.500 in (11.430 cm)
Package 2 Width	5.400 in (13.716 cm)
Package 2 Length	12.600 in (32.004 cm)
Package 2 Weight	3.801 lb(US) (1.724 kg)
Unit Type of Package 3	CAR
Number of Units in Package 3	40
Package 3 Height	11.000 in (27.940 cm)
Package 3 Width	7.200 in (18.288 cm)
Package 3 Length	17.800 in (45.212 cm)
Package 3 Weight	16.200 lb(US) (7.348 kg)

Contractual warranty

Warranty (in months)	24
----------------------	----

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

 Environmental footprint	
Total lifecycle Carbon footprint	0 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	0 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	14 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better

 Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Compliant
REACH Regulation	Free of Substances of Very High Concern above the threshold
California proposition 65	WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Use Longer

 Lifetime extension	
Repair	No

Use Again

 Repack and remanufacture	
Recyclability potential, in %	29
Take-back	No

Technical Illustration

Wiring diagram

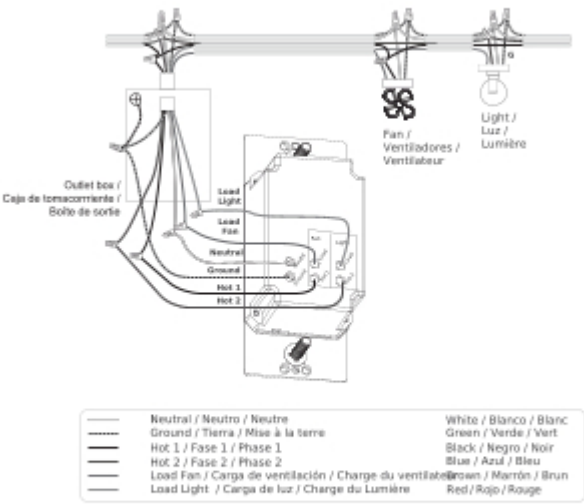


Image of product / Alternate images

Alternative





Image of product in real life situation

