

# Product data sheet

Specifications



## CANopen interface I/O block, Modicon TM7, IP67, 8 M8

TM7NCOM08B

**Product availability: Non-Stock - Not normally stocked in distribution facility**

### Main

Range of Product	Modicon TM7
Product or Component Type	CANopen interface I/O block
Range Compatibility	Modicon LMC058 Modicon M258
Enclosure Material	Plastic
Bus type	CANopen
[Ue] rated operational voltage	24 V DC
Input/output number	8
input/output number of block	8 I/O

### Complementary

Discrete input number	0...8 configurable by software
Discrete input voltage	24 V
Discrete input voltage type	DC
Discrete input current	4.4 mA
Discrete input logic	Positive
Discrete output number	0...8 configurable by software
Discrete output voltage	24 V
Discrete output voltage type	DC
Discrete output current	$\leq 0.5$ A
Discrete output type	Transistor
Sensor power supply	24 V, 500 mA for all channels overload, short-circuit and reverse polarity protection
Electrical connection	1 male connector M12 - A coding - 5 ways CANopen bus IN 1 female connector M12 - B coding - 4 ways TM7 bus OUT 8 female connectors M8 - 3 ways sensor or actuator 1 male connector M8 - 4 ways power IN 1 female connector M8 - 4 ways power OUT
Local signalling	2 LEDs for bus diagnostic 1 LED for actuator power supply diagnostics 1 LED for sensor power supply diagnostics
Operating position	Any position
Fixing Mode	By 2 screws
Net Weight	0.430 lb(US) (0.195 kg)

### Environment

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>Standards</b>	IEC 61131-2
<b>Product Certifications</b>	cURus ATEX II 3g EEx nA II T5 GOST-R C-tick
<b>Marking</b>	CE
<b>Ambient Air Temperature for Operation</b>	14...140 °F (-10...60 °C)
<b>Ambient Air Temperature for Storage</b>	-13...185 °F (-25...85 °C)
<b>Relative humidity</b>	5...95 % without condensation or dripping water
<b>Pollution degree</b>	2 IEC 60664
<b>IP degree of protection</b>	IP67 conforming to IEC 61131-2
<b>Operating altitude</b>	0...6561.68 ft (0...2000 m)
<b>Storage altitude</b>	0...9842.5 ft (0...3000 m)
<b>Vibration resistance</b>	7.5 mm constant amplitude (f= 2...8 Hz) conforming to IEC 60721-3-5 Class 5M3 2 gn constant acceleration (f= 8...200 Hz) conforming to IEC 60721-3-5 Class 5M3 4 gn constant acceleration (f= 200...500 Hz) conforming to IEC 60721-3-5 Class 5M3
<b>Shock resistance</b>	30 gn 11 ms IEC 60721-3-5 Class 5M3
<b>Resistance to electrostatic discharge</b>	6 kV in contact IEC 61000-4-2 8 kV in air IEC 61000-4-2
<b>Resistance to electromagnetic fields</b>	9.1 V/m (10 V/m) 0.08...2 Hz IEC 61000-4-3 0.9 V/m (1 V/m) 2...2.7 Hz IEC 61000-4-3
<b>Resistance to fast transients</b>	2 kV IEC 61000-4-4 power supply) 1 kV IEC 61000-4-4 input/output) 1 kV IEC 61000-4-4 shielded cable)
<b>surge withstand for DC 24 V circuit</b>	1 kV power supply (common mode) IEC 61000-4-5 0.5 kV power supply (differential mode) IEC 61000-4-5 1 kV unshielded links (common mode) IEC 61000-4-5 0.5 kV unshielded links (differential mode) IEC 61000-4-5 1 kV shielded links (common mode) IEC 61000-4-5 0.5 kV shielded links (differential mode) IEC 61000-4-5
<b>Electromagnetic compatibility</b>	EN/IEC 61000-4-6
<b>Disturbance radiated/conducted</b>	CISPR 11

## Ordering and shipping details

<b>Category</b>	US1PC1222532
<b>Discount Schedule</b>	PC12
<b>GTIN</b>	3595864092782
<b>Returnability</b>	No
<b>Country of origin</b>	AT

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Nbr. of units in pkg.</b>	1
<b>Package 1 Height</b>	1.97 in (5.000 cm)
<b>Package 1 Width</b>	2.32 in (5.900 cm)
<b>Package 1 Length</b>	4.17 in (10.600 cm)
<b>Package weight(Lbs)</b>	7.654 oz (217.000 g)
<b>Unit Type of Package 2</b>	S02

<b>Number of Units in Package 2</b>	24
<b>Package 2 Height</b>	5.91 in (15.000 cm)
<b>Package 2 Width</b>	11.81 in (30.000 cm)
<b>Package 2 Length</b>	15.75 in (40.000 cm)
<b>Package 2 Weight</b>	12.527 lb(US) (5.682 kg)

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard

No

Packaging without single use plastic

Yes

[EU RoHS Directive](#)

Pro-active compliance (Product out of EU RoHS legal scope)

REACH Regulation

[REACH Declaration](#)

California proposition 65

**WARNING:** This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

PVC free

Yes

## Use Again

### Repack and remanufacture

[Circularity Profile](#)

[End of Life Information](#)

Take-back

No

WEEE


 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Presentation

**TM7 CANopen Interface I/O Block**

---

**Description**

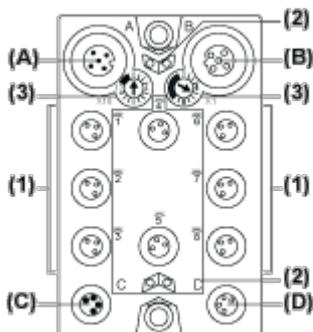

- (A) CANopen bus IN connector
- (B) TM7 bus OUT connector
- (C) 24 Vdc power IN connector
- (D) 24 Vdc power OUT connector
- (1) Input / Output connectors
- (2) Status and channel LEDs
- (3) CANopen address settings rotary switches

**Connector and Channel Assignments**


I/O connectors	Channel types	Channels
1	Input/Output	I0/Q0
2	Input/Output	I1/Q1
3	Input/Output	I2/Q2
4	Input/Output	I3/Q3
5	Input/Output	I4/Q4
6	Input/Output	I5/Q5
7	Input/Output	I6/Q6
8	Input/Output	I7/Q7

Dimensions Drawings

TM7 Block, Size 1

---


Dimensions

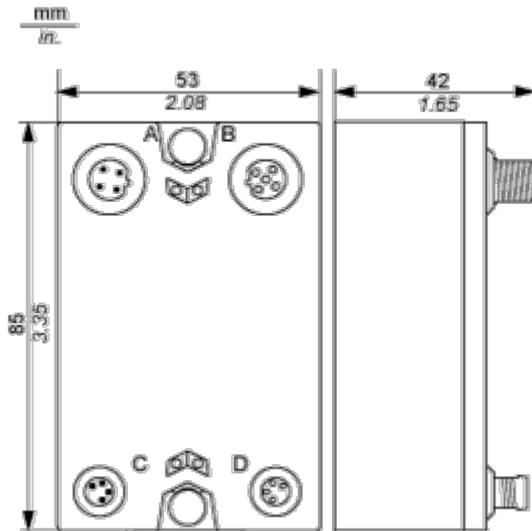

Mounting and Clearance

Spacing Requirements

---

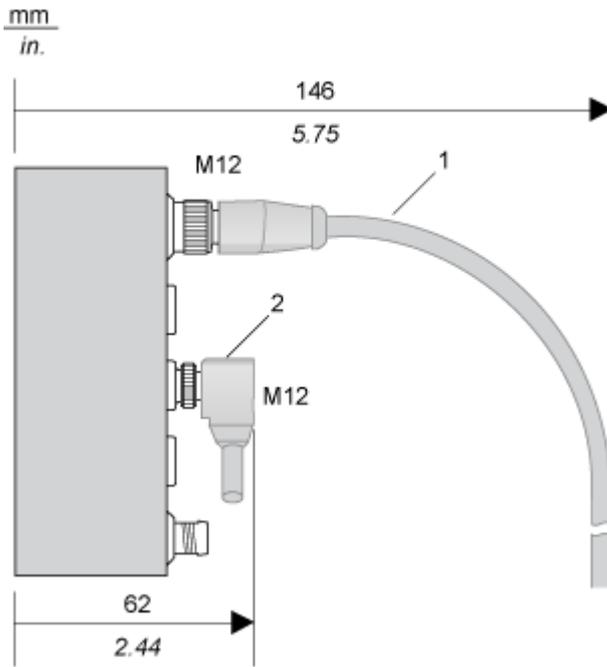


- 1 Straight cable
- 2 Elbowed cable

Installation Guidelines


---

TM7 Block on an Aluminium Frame

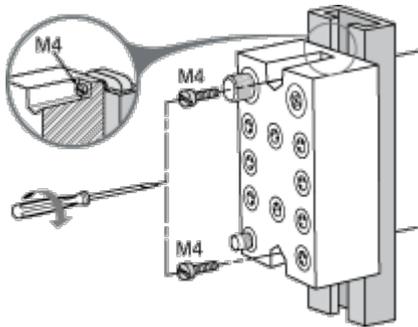

NOTE: Maximum torque to fasten the required M4 screws is 0.6 N.m (5.3 lbf-in).

TM7 Block on a DIN Rail


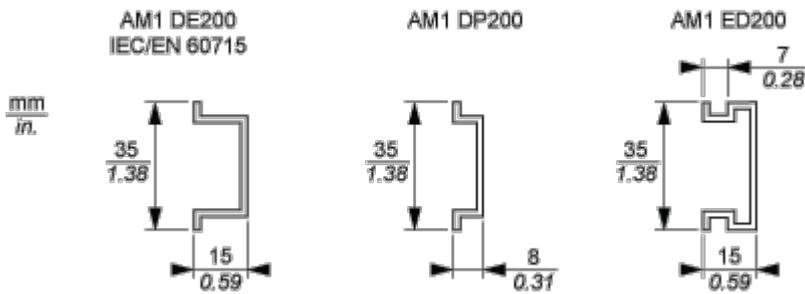


NOTE: Only size 1 (smallest) blocks can be installed on DIN rail with the TM7ACMP mounting plate.

TM7 Block Directly on the Machine


Drilling template of the block:

mm  
in.

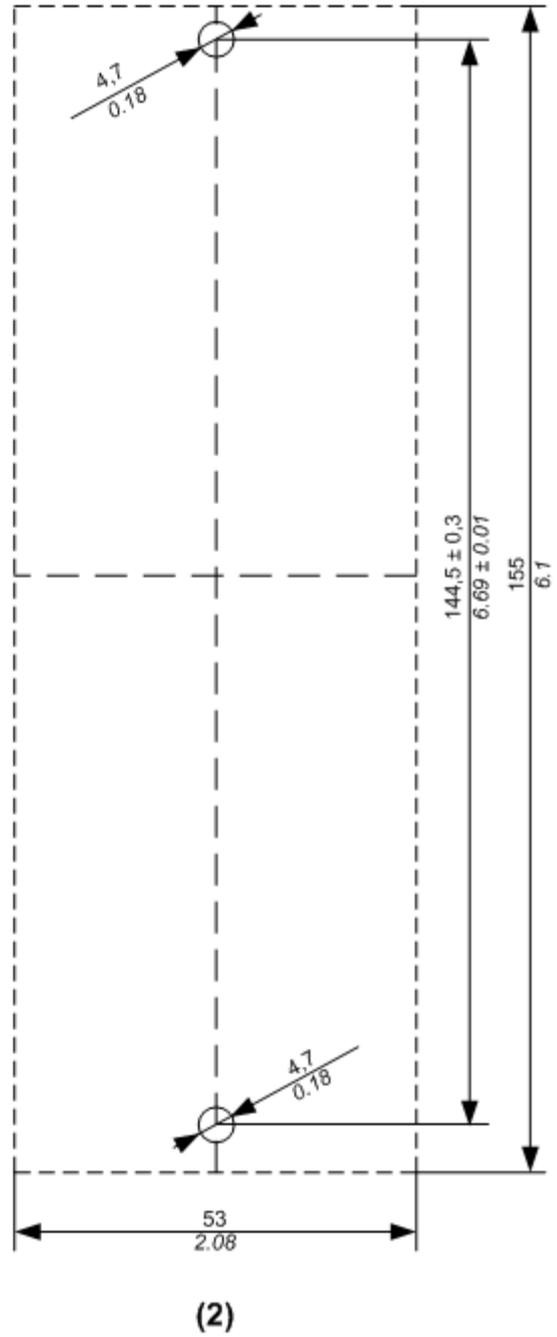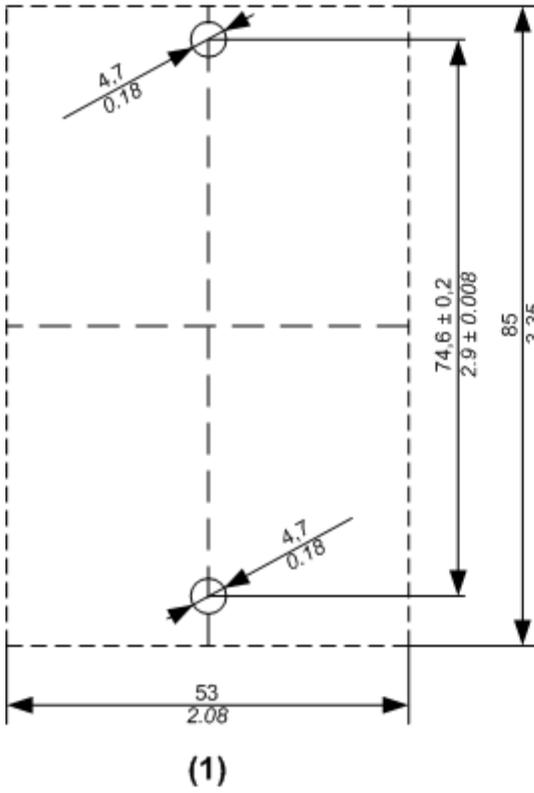

- (1) Size 1
- (2) Size 2

The thickness of the base plate should be taken into consideration when defining the screw length.

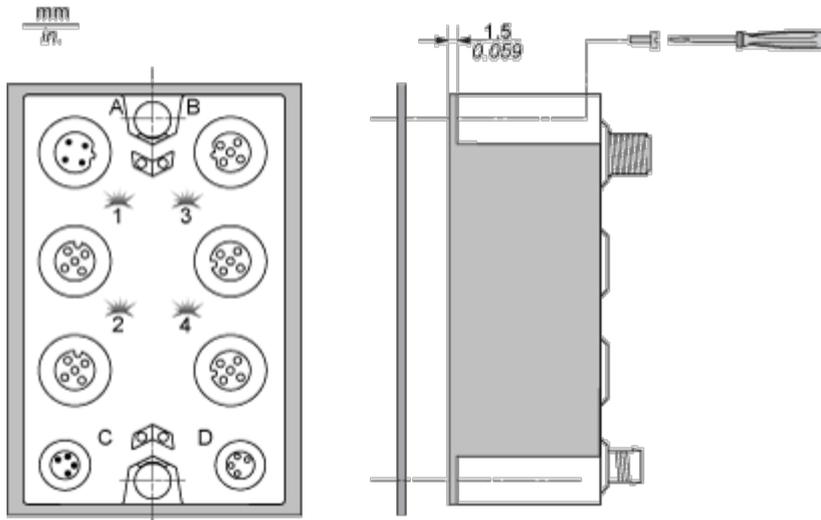


NOTE: Maximum torque to fasten the required M4 screws is 0.6 N.m (5.3 lbf-in).

Connections and Schema

Wiring Diagram


---

Pin Assignments for I/O Connectors

Connection	Pin	Designation
	1	24 Vdc sensor / actuator supply
	3	0 Vdc
	4	DI/DO: input/output signal

CANopen Pins and Connectors

Connector Assignments


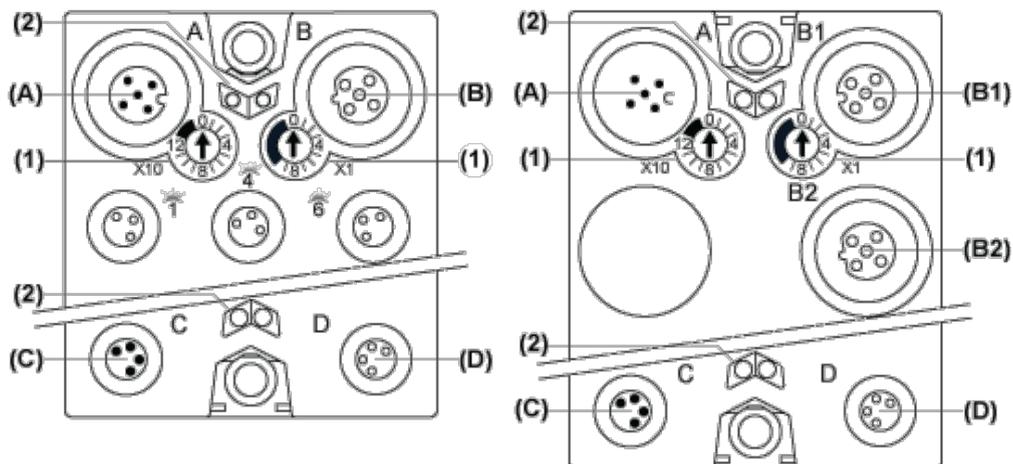


- (A) Field bus IN connector
- (B) and (B2) TM7 bus OUT connector M12
- (B1) CANopen bus OUT connector M12
- (C) 24 Vdc power IN connector
- (D) 24 Vdc power OUT connector
- (1) Address settings rotary switches
- (2) Status LEDs

Pin Assignments


Connectors	Pin	Designation
	1	CAN_SHLD
	2	(CAN_V+)
	3	CAN_GND
	4	CAN_H
	5	CAN_L
	1	TM7 V+
	2	TM7 Bus Data
	3	TM7 0V
	4	TM7 Bus Data
	5	N.C.
	1	CAN_SHLD

Connectors	Pin	Designation
	2	(CAN_V+)
	3	CAN_GND
	4	CAN_H
	5	CAN_L

Connectors	Pin	Designation
	1	24 Vdc main power
	2	24 Vdc I/O power segment
	3	0 Vdc
	4	0 Vdc
	1	24 Vdc I/O power segment
	2	24 Vdc I/O power segment
	3	0 Vdc
	4	0 Vdc

### Wiring the Power Supply

Connections	2 Power Supplies
24 Vdc main power that generates power for TM7 power bus	PS1
24 Vdc I/O power segment	PS2

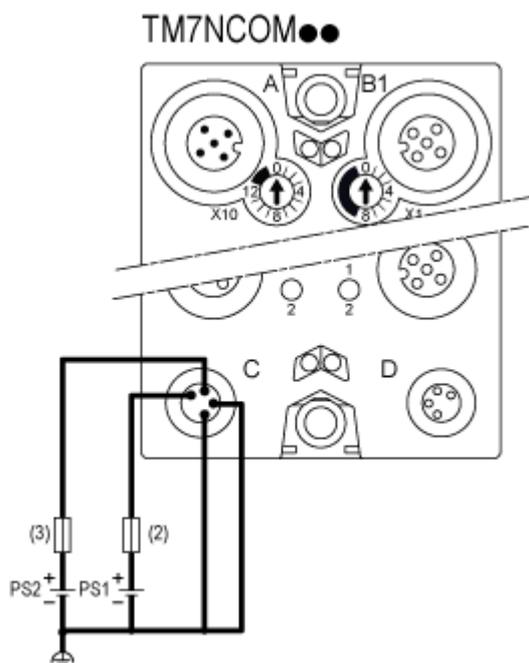


- (2) External fuse, Type T slow-blow, 1 A, 250 V <sup>1</sup>
- (3) External fuse, Type T slow-blow, 4 A max., 250 V
- PS1 External isolated main power supply, 24 Vdc
- PS2 External isolated I/O power supply, 24 Vdc

<sup>1</sup> Fuse limited to 1 A per PDB, maximum fuse limited to 5 A with maximum 4 PDB interconnected. If less than 4 PDBs size the fuse in accordance with the number of PDBs.

Performance Curves

Switching Inductive Load Characteristics

---

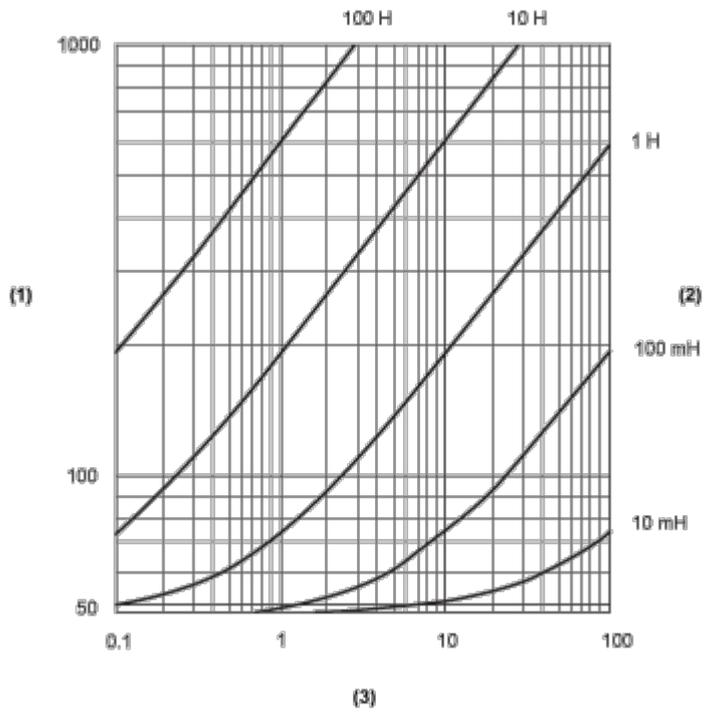

- (1) Load resistance in  $\Omega$
- (2) Load inductance in H
- (3) Max. operating cycles / second