

Product data sheet

Specifications



EMC input filter, Altivar, Lexium, 15A, 3 phases, 380 to 500V

VW3A4422

Main

Range of product	Altivar Lexium
Product or component type	EMC input filter
Range compatibility	Altivar 32 Altivar Machine ATV340 Lexium 32 Altivar Machine ATV320 Lexium 28 Lexium 52
Product compatibility	LXM28A ATV32, 380...500 V, 0.37...1.5 kW LXM32, three-phase, line current 1.2...8.7 A Variable speed drive ATV320...B at 0.37 kW, 380...500 V, three phase Variable speed drive ATV320...B at 0.55 kW, 380...500 V, three phase Variable speed drive ATV320...B at 0.75 kW, 380...500 V, three phase Variable speed drive ATV320...B at 1.1 kW, 380...500 V, three phase Variable speed drive ATV320...B at 1.5 kW, 380...500 V, three phase Variable speed drive ATV320...B at 2.2 kW, 380...500 V, three phase Variable speed drive ATV320...B at 3 kW, 380...500 V, three phase Variable speed drive ATV320...B at 4 kW, 380...500 V, three phase Variable speed drive ATV340 at 0.75 kW, 380...480 V Variable speed drive ATV340 at 1.5 kW, 380...480 V
Product specific application	Radio interference input filter
Mounting location	At variable speed drive side
Network number of phases	Three phase

Complementary

Maximum cable distance between devices	20 m conforming to IEC 61800-3 category C1 50 m conforming to IEC 61800-3 category C2 100 m conforming to IEC 61800-3 category C3
[In] rated current	15 A
Thermal losses	9.9 W
Network rated voltage	380...500 V
Tolerance	- 15...10 %
Net weight	0.9 kg
Emc filter compatibility	Type 022

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.200 cm

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Package 1 Width	15.800 cm
Package 1 Length	23.200 cm
Package 1 Weight	936.000 g
Unit Type of Package 2	P06
Number of Units in Package 2	80
Package 2 Height	75.000 cm
Package 2 Width	60.000 cm
Package 2 Length	80.000 cm
Package 2 Weight	87.400 kg

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better


 Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

 Repack and remanufacture	
Take-back	No

Dimensions Drawings

Additional EMC Input Filters

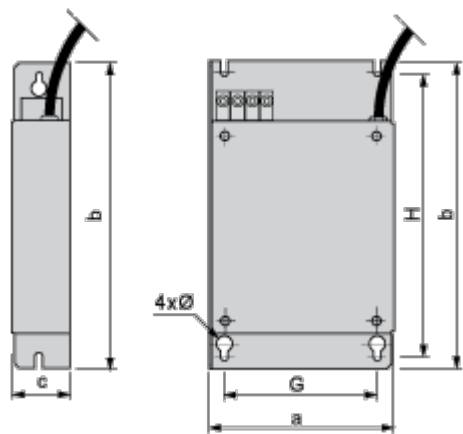

Dimensions in mm

a	b	c	G	H	Ø
107	195	42	85	180	4.5


Dimensions in in.

a	b	c	G	H	Ø
4.21	7.68	1.65	3.35	7.09	0.18

Mounting and Clearance


Mounting Recommendations

Mounting the Filter on the Side of the Drive

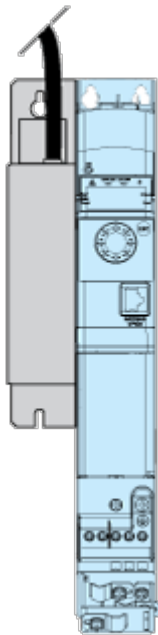

Connections and Schema

Recommended Schema

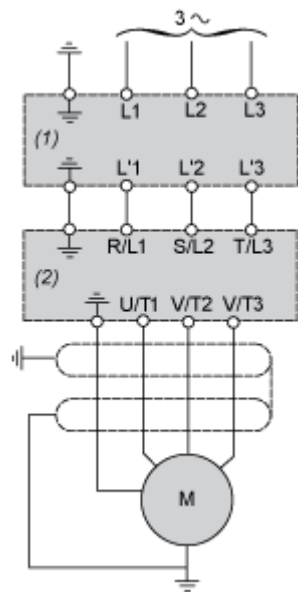

- (1) Filter
- (2) Drive