

# Product data sheet

Specifications

## braking resistor, Altivar, 100Ohm, 28W, IP00



VW3A7723

### Main

<b>Range of product</b>	Altivar
<b>Range compatibility</b>	Altivar 12 Altivar 312 Altivar 312 Solar Easy Altivar 310 Easy Altivar 310L
<b>Product compatibility</b>	Variable speed drive ATV310 at 1.5 kW Variable speed drive ATV310 at 2.2 kW ATV12H018M2 ATV12H018M3 ATV12H037M2 ATV12H037M3 ATV12H055M2 ATV12H075M2 ATV12H075M3 ATV12HU15M2 ATV12HU15M3 ATV12P037M2 ATV12P037M3 ATV12P055M2 ATV12P075M2 ATV12P075M3 ATV12PU15M3 ATV312H018M2 ATV312H018M3 ATV312H037M2 ATV312H037M3 ATV312H037N4 ATV312H055M2 ATV312H055M3 ATV312H055N4 ATV312H075M2 ATV312H075M3 ATV312H075N4 ATV312HU11M2 ATV312HU11M3 ATV312HU11N4 ATV312HU15M2 ATV312HU15M3 ATV312HU15N4 ATV312HU22N4 ATV312H075S6 ATV312HU15S6 ATV312HU22S6 Variable speed drive ATV310L at 0.75 kW Variable speed drive ATV310L at 1.5 kW Variable speed drive ATV310L at 2.2 kW Variable speed drive ATV310L at 3.0 kW Variable speed drive ATV310L at 4.0 kW Variable speed drive ATV310L at 5.5 kW
<b>Ohmic value</b>	100 Ohm

### Complementary

<b>Average power available</b>	28 W at 50 °C 32 W at 40 °C
--------------------------------	--------------------------------

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

<b>Width</b>	60 mm
<b>Height</b>	170 mm
<b>Depth</b>	30 mm
<b>Net weight</b>	0.605 kg

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	7.500 cm
<b>Package 1 Width</b>	17.500 cm
<b>Package 1 Length</b>	23.500 cm
<b>Package 1 Weight</b>	667.000 g
<b>Unit Type of Package 2</b>	S04
<b>Number of Units in Package 2</b>	12
<b>Package 2 Height</b>	30.000 cm
<b>Package 2 Width</b>	40.000 cm
<b>Package 2 Length</b>	60.000 cm
<b>Package 2 Weight</b>	9.323 kg
<b>Unit Type of Package 3</b>	P06
<b>Number of Units in Package 3</b>	48
<b>Package 3 Height</b>	75.000 cm
<b>Package 3 Width</b>	60.000 cm
<b>Package 3 Length</b>	80.000 cm
<b>Package 3 Weight</b>	46.000 kg

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Use Better

 <b>Materials and Substances</b>	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
<a href="#">EU RoHS Directive</a>	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	735ea399-2868-47fa-83de-4130bb0137d4
California proposition 65	<b>WARNING:</b> This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>


### Use Again

 <b>Repack and remanufacture</b>	
Take-back	No

Dimensions Drawings

Dimensions

---

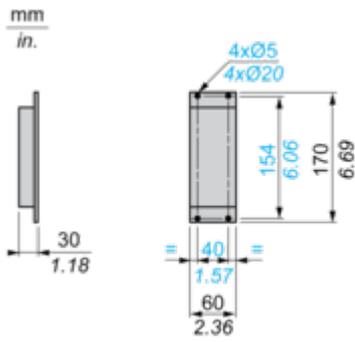

Mounting and Clearance

Clearance

---

