

Main

Range Compatibility	Altivar&Nbsp;Process ATV900 Altivar Machine ATV340 Altivar Machine ATV320
Product or Component Type	Braking resistor
Ohmic value	8 Ohm
[Ue] rated operational voltage	24 V DC 250 V AC

Complementary

Product compatibility	Variable speed drive ATV930 wall mount 55 kW 380...480 V light cycle Variable speed drive ATV930 wall mount 15 kW 200...240 V light cycle Variable speed drive ATV950 wall mount 55 kW 380...480 V light cycle Variable speed drive ATV930 wall mount 15 kW 200...240 V medium cycle Variable speed drive ATV340 45 kW 380...480 V light cycle Variable speed drive ATV320 11 kW 200...240 V
Duty cycle	Light cycle (heavy duty) <0.8 s braking with 150 % braking torque for a 40 s cycle Light cycle (normal duty) <0.8 s braking with 120 % braking torque for a 40 s cycle Medium cycle (normal duty) <4 s braking with 135 % braking torque for a 40 s cycle Medium cycle (heavy duty) <4 s braking with 165 % braking torque for a 40 s cycle
Average power available	1.1 kW 122 °F (50 °C)
Electrical connection	Terminal <= 35 mm² / AWG 3 drive Terminal <= 4 mm² / AWG 10 temperature control switch
Protection type	Thermal protection via drive or temperature control switch 120 °C
Width	7.5 in (190 mm)
Height	25.2 in (640 mm)
Depth	7.09 in (180 mm)
Net Weight	9.9 lb(US) (4.5 kg)

Environment

IP Degree of Protection	IP20
Ambient Air Temperature for Storage	-13...158 °F (-25...70 °C)
Ambient Air Temperature for Operation	32...122 °F (0...50 °C)

Ordering and shipping details

Category	US1CP4E22209
Discount Schedule	CP4E
GTIN	3606480802294
Returnability	No
Country of origin	DE

Packing Units


Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9.843 in (25.000 cm)
Package 1 Width	7.874 in (20.000 cm)
Package 1 Length	25.591 in (65.000 cm)
Package 1 Weight	11.777 lb(US) (5.342 kg)
Unit Type of Package 2	P06
Number of Units in Package 2	6
Package 2 Height	29.528 in (75.000 cm)
Package 2 Width	23.622 in (60.000 cm)
Package 2 Length	31.496 in (80.000 cm)
Package 2 Weight	89.402 lb(US) (40.552 kg)

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes

Dimensions

Right Side and Front View

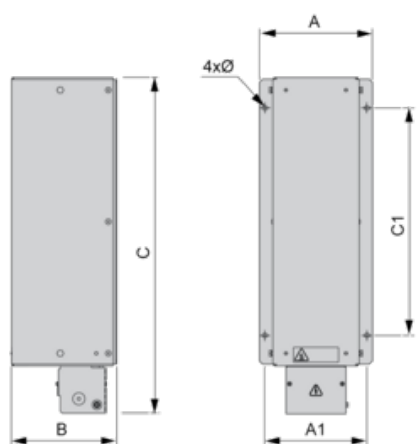

Dimensions in mm

A	B	C	A1	C1	Ø
190	180	640	170	380	6.6 x 9

Dimensions in in.


A	B	C	A1	C1	Ø
7.48	7.09	25.20	6.69	14.96	0.26 x 0.35

Mounting and Clearance




(1) Braking resistor

mm
in.

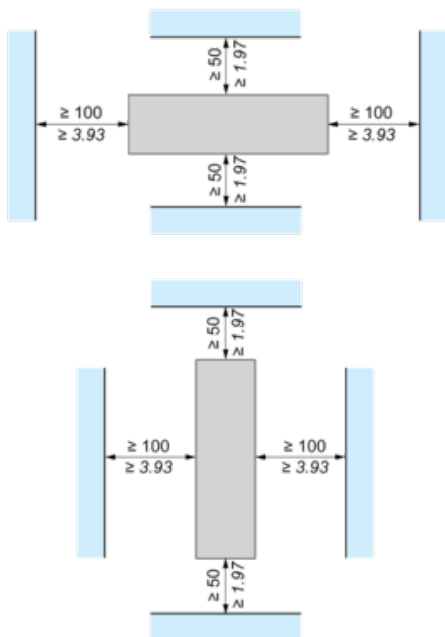

Recommended Schema

1 Braking Resistor




A1 : Drive or external braking unit

A2 : Braking resistor

PA, PB : Bus DC

2 Braking Resistors

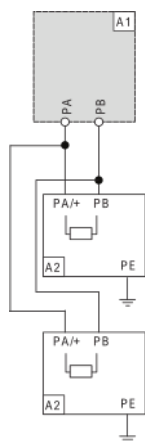

A1 : Drive or external braking unit

A2 : Braking resistor

PA, PB : Bus DC