

Product data sheet

Specifications



Connector module, Lexium 32i,
connection for industrial connectors,
EtherCAT, 2 DI source, STO

VW3M9108

**Product availability: Non-Stock - Not normally stocked in
distribution facility**

Main

Range of Product	Lexium 32i
Product or Component Type	Connector module
Accessory / separate part category	Connection accessories
Electrical Connection	Industrial connector

Complementary

Product compatibility	Drive control unit LXM32i EtherCAT
Accessory / separate part destination	Motor BMI with drive control unit Lexium 32i
Range Compatibility	Lexium 32i
Communication interface	EtherCAT
Input/output type	2 discrete inputs
Discrete input logic	Source
Safety Function	STO (safe torque off)
Net Weight	0.467 lb(US) (0.212 kg)

Ordering and shipping details

Category	US1PC5618289
Discount Schedule	PC56
GTIN	3606480610851
Returnability	No
Country of origin	DE

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	3.23 in (8.200 cm)
Package 1 Width	4.53 in (11.500 cm)
Package 1 Length	6.69 in (17.000 cm)
Package weight(Lbs)	7.901 oz (224.000 g)
Unit Type of Package 2	S03
Number of Units in Package 2	6

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Package 2 Height	11.81 in (30.000 cm)
Package 2 Width	11.81 in (30.000 cm)
Package 2 Length	15.75 in (40.000 cm)
Package 2 Weight	4.006 lb(US) (1.817 kg)

Contractual warranty

Warranty	18 months
-----------------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard

No

Packaging without single use plastic

No

[EU RoHS Directive](#)

Pro-active compliance (Product out of EU RoHS legal scope)

REACH Regulation

[REACH Declaration](#)

California proposition 65

WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

PVC free

Yes

Use Again

Repack and remanufacture

[Circularity Profile](#)


[End of Life Information](#)

Take-back

No

Connections and Schema

Connection of I/O Module for EtherCAT with Industrial Connectors

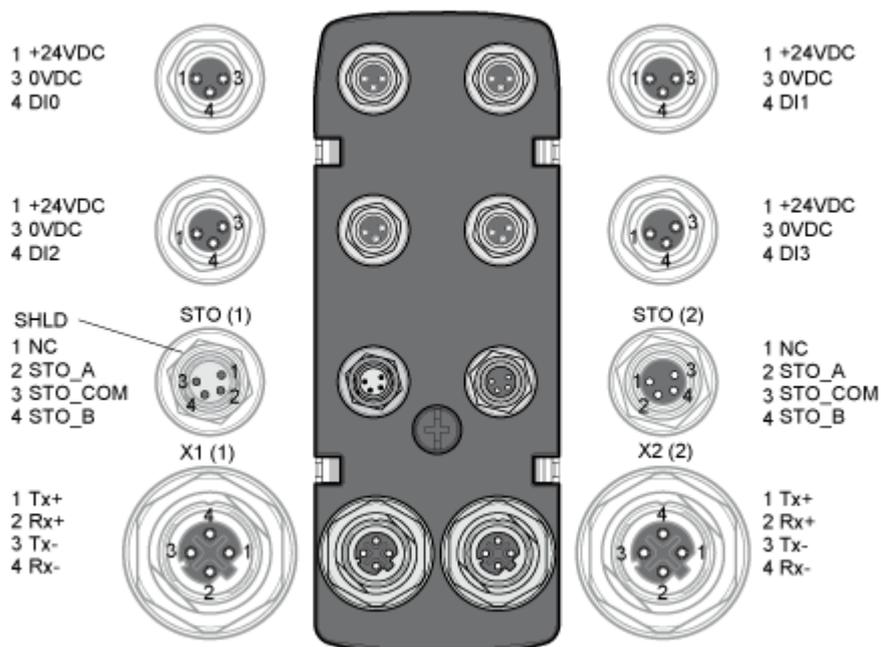

- (1) IN
- (2) OUT

Signal	Meaning
+24VDC	24 V signal power supply
0VDC	Reference potential to +24VDC
DI0	Digital input 0
DI1	Digital input 1
DI2	Digital input 2
DI3	Digital input 3
STO_A	Safety function STO
STO_COM	Reference potential for safety function STO
STO_B	Safety function STO
SHLD	Shield (grounded internally)
Tx+	Ethernet transmit signal +
Tx-	Ethernet transmit signal -
Rx+	Ethernet receive signal +

Signal	Meaning
Rx-	Ethernet receive signal -
NC	Not connected