

# Product data sheet

Specifications



Illuminated double headed push button, Harmony XB4, metal, 22mm, 1 green flush I + 1 pilot light + 1 red projecting O, 1 NO + 1 NC

XB4BW73731B5

**Product availability:** Stock - Normally stocked in distribution facility

**Important message:** A change in appearance may be noted on the product but does not affect its use in terms of function and safety. This makes it compatible with our Universal LED blocks

## Main

|                           |  |
|---------------------------|--|
| Range of Product          | Harmony XB4  |
| Product or Component Type | Illuminated double-headed push-button  |
| Device short name         | XB4  |
| Bezel material            | Chromium plated metal  |
| Head type                 | Standard   |
| Mounting diameter         | 0.9 in (22.5 mm)   |
| Colour of marking         | White marking when green, red or black caps<br>Black marking when white caps |
| Light source              | Protected LED  |
| Light source colour       | White  |
| Device presentation       | Complete product   |

## Complementary

|                                    |   |
|------------------------------------|---|
| Fixing collar material             | Zamak   |
| Height                             | 2.0 in (50 mm)  |
| Width                              | 1.2 in (30 mm)  |
| Depth                              | 2.3 in (59 mm)  |
| Net Weight                         | 0.29 lb(US) (0.13 kg)                                       |
| Resistance to high pressure washer | 1015.3 psi (7000000 Pa) 131 °F (55 °C) 0.1 m                |
| Shape of signaling unit head       | Rectangular   |
| Type of operator                   | spring return   |
| Operator profile                   | 1 flush - 1 projecting push-buttons - 1 central pilot light |
| Operators description              | Green "I" - red "O"   |
| Operator profile                   | Green flush, I white)<br>Red projecting, O white)           |
| Contacts type and composition      | 1 NO + 1 NC   |
| Contact operation                  | Slow-break  |
| Contacts usage                     | Standard contacts   |
| Positive opening                   | With IEC 60947-5-1 appendix K                               |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

|   |  |
|---|--|
| <b>Operating travel</b>                                       | 0.06 in (1.5 mm) NC changing electrical state)<br>0.1 in (2.6 mm) NO changing electrical state)<br>0.2 in (4.3 mm) total travel)   |
| <b>Operating force</b>  | 3.5 N NC changing electrical state<br>3.8 N NO changing electrical state   |
| <b>Mechanical durability</b>                                  | 1000000 cycles   |
| <b>Connections - terminals</b>                                | Screw clamp terminals, ≤ 2 x 1.5 mm <sup>2</sup> with cable end IEC 60947-1<br>Screw clamp terminals, ≥ 1 x 0.22 mm <sup>2</sup> without cable end IEC 60947-1   |
| <b>Tightening torque</b>                                      | 7.08...10.6 lbf.in (0.8...1.2 N.m) IEC 60947-1   |
| <b>Shape of screw head</b>                                    | Cross JIS No 1<br>Cross Philips no 1<br>Cross pozidriv No 1<br>Slotted flat Ø 4 mm<br>Slotted flat Ø 5.5 mm  |
| <b>Contacts material</b>                                      | Silver alloy (Ag/Ni)   |
| <b>Short-circuit protection</b>                               | 10 A cartridge fuse gG IEC 60947-5-1   |
| <b>[I<sub>th</sub>] conventional free air thermal current</b> | 10 A IEC 60947-5-1   |
| <b>[U<sub>i</sub>] rated insulation voltage</b>               | 600 V 3)IEC 60947-1  |
| <b>[U<sub>imp</sub>] rated impulse withstand voltage</b>      | 6 kV IEC 60947-1   |
| <b>[I<sub>e</sub>] rated operational current</b>              | 3 A 240 V, AC-15, A600 IEC 60947-5-1<br>6 A 120 V, AC-15, A600 IEC 60947-5-1<br>0.1 A 600 V, DC-13, Q600 IEC 60947-5-1<br>0.27 A 250 V, DC-13, Q600 IEC 60947-5-1<br>0.55 A 125 V, DC-13, Q600 IEC 60947-5-1<br>1.2 A 600 V, AC-15, A600 IEC 60947-5-1   |
| <b>Electrical durability</b>                                  | 1000000 cycles, AC-15, 2 A 230 V 3600 cyc/h 0.5 IEC 60947-5-1 appendix C<br>1000000 cycles, AC-15, 3 A 120 V 3600 cyc/h 0.5 IEC 60947-5-1 appendix C<br>1000000 cycles, AC-15, 4 A 24 V 3600 cyc/h 0.5 IEC 60947-5-1 appendix C<br>1000000 cycles, DC-13, 0.2 A 110 V 3600 cyc/h 0.5 IEC 60947-5-1 appendix C<br>1000000 cycles, DC-13, 0.5 A 24 V 3600 cyc/h 0.5 IEC 60947-5-1 appendix C |
| <b>Electrical reliability</b>                                 | $\Lambda < 10\exp(-6)$ 5 V 1 mA in clean environment IEC 60947-5-4<br>$\Lambda < 10\exp(-8)$ 17 V 5 mA in clean environment IEC 60947-5-4  |
| <b>Signalling type</b>  | Steady   |
| <b>Bulb base</b>  | Integral LED   |
| <b>[U<sub>s</sub>] rated supply voltage</b>                   | 24 V AC/DC 50/60 Hz  |
| <b>Supply voltage limits</b>                                  | 19.2...30 V DC<br>21.6...26.4 V AC   |
| <b>Current Consumption</b>                                    | 18 mA  |
| <b>Service life</b>   | 100000 h at rated voltage and 25 °C  |
| <b>Surge withstand</b>  | 1 kV IEC 61000-4-5   |
| <b>Compatibility code</b>                                     | XB4  |

## Environment

|  |   |
|--|---|
| <b>Protective treatment</b>                  | TH  |
| <b>Ambient Air Temperature for Storage</b>   | -40...158 °F (-40...70 °C)                          |
| <b>Ambient Air Temperature for Operation</b> | -40...158 °F (-40...70 °C)                          |
| <b>Electrical shock protection class</b>     | Class I conforming to IEC 60536                     |
| <b>IP degree of protection</b>               | IP66 IEC 60529<br>IP69K IEC 60529<br>IP69 IEC 60529 |

|  |   |
|--|---|
| <b>NEMA degree of protection</b>             | NEMA 13<br>NEMA 4X  |
| <b>IK degree of protection</b>               | IK06 conforming to IEC 50102  |
| <b>Standards</b>                             | IEC 60947-1<br>IEC 60947-5-1<br>CSA C22.2 No 14<br>JIS C8201-5-1<br>IEC 60947-5-5<br>IEC 60947-5-4<br>UL 508<br>JIS C8201-1 |
| <b>Product Certifications</b>                | CSA<br>LROS (Lloyds register of shipping)<br>BV<br>UL Listed<br>DNV   |
| <b>Vibration resistance</b>                  | 5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6  |
| <b>Shock resistance</b>                      | 30 gn 18 ms) half sine wave acceleration IEC 60068-2-27<br>50 gn 11 ms) half sine wave acceleration IEC 60068-2-27          |
| <b>Resistance to fast transients</b>         | 2 kV IEC 61000-4-4  |
| <b>Resistance to electromagnetic fields</b>  | 9.1 V/m (10 V/m) IEC 61000-4-3  |
| <b>Resistance to electrostatic discharge</b> | 6 kV on contact (on metal parts) IEC 61000-4-2<br>8 kV in free air (in insulating parts) IEC 61000-4-2                      |
| <b>Electromagnetic emission</b>              | Class B IEC 55011   |

## Ordering and shipping details

|                          |               |
|--------------------------|---------------|
| <b>Category</b>          | US10CS222468  |
| <b>Discount Schedule</b> | 0CS2          |
| <b>GTIN</b>              | 3389119043601 |
| <b>Returnability</b>     | Yes           |
| <b>Country of origin</b> | FR            |

## Packing Units

|                                     |                           |
|-------------------------------------|---------------------------|
| <b>Unit Type of Package 1</b>       | PCE                       |
| <b>Nbr. of units in pkg.</b>        | 1                         |
| <b>Package 1 Height</b>             | 1.378 in (3.500 cm)       |
| <b>Package 1 Width</b>              | 2.165 in (5.500 cm)       |
| <b>Package 1 Length</b>             | 3.543 in (9.000 cm)       |
| <b>Package weight(Lbs)</b>          | 4.402 oz (124.800 g)      |
| <b>Unit Type of Package 2</b>       | S03                       |
| <b>Number of Units in Package 2</b> | 100                       |
| <b>Package 2 Height</b>             | 11.811 in (30.000 cm)     |
| <b>Package 2 Width</b>              | 11.811 in (30.000 cm)     |
| <b>Package 2 Length</b>             | 15.748 in (40.000 cm)     |
| <b>Package 2 Weight</b>             | 28.451 lb(US) (12.905 kg) |
| <b>Unit Type of Package 3</b>       | P06                       |
| <b>Number of Units in Package 3</b> | 800                       |
| <b>Package 3 Height</b>             | 29.528 in (75.000 cm)     |

---

|                         |                             |
|-------------------------|-----------------------------|
| <b>Package 3 Width</b>  | 31.496 in (80.000 cm)       |
| <b>Package 3 Length</b> | 23.622 in (60.000 cm)       |
| <b>Package 3 Weight</b> | 245.242 lb(US) (111.240 kg) |

---

## **Contractual warranty**

---

|                 |           |
|-----------------|-----------|
| <b>Warranty</b> | 18 months |
|-----------------|-----------|

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) 14

Environmental Disclosure [Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic Yes

[EU RoHS Directive](#)

Pro-active compliance (Product out of EU RoHS legal scope)

SCIP Number 2c36ce9a-adfd-4e17-bb1b-b76b7fc6aefe

California proposition 65 **WARNING:** This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## Use Again

### Repack and remanufacture

Circularity Profile [End of Life Information](#)


Take-back No

WEEE Label  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings



**Dimensions**

---

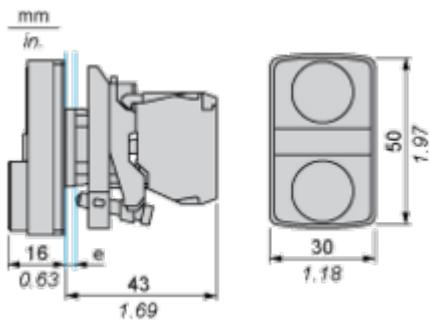


Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)
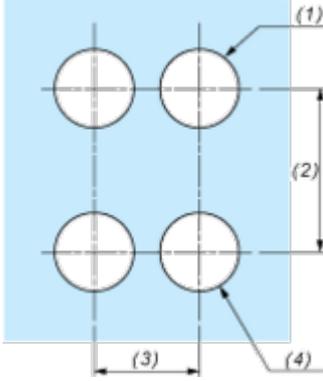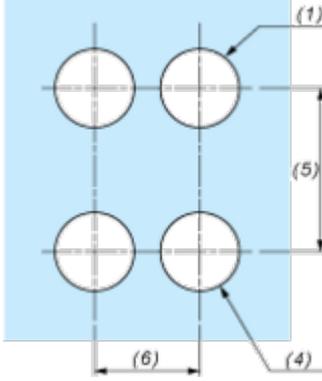
| Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board   | Connection by Faston Connectors  |
|---|--|
|    |  |
| <p>(1) Diameter on finished panel or support<br/>                 (2) 40 mm min. / 1.57 in. min.<br/>                 (3) 30 mm min. / 1.18 in. min.<br/>                 (4) <math>\varnothing 22.5 \text{ mm} / 0.89 \text{ in. recommended } (\varnothing 22.3 \text{ mm }_0^{+0.4} / 0.88 \text{ in. }_0^{+0.016})</math><br/>                 (5) 45 mm min. / 1.78 in. min.<br/>                 (6) 32 mm min. / 1.26 in. min.</p> |  |





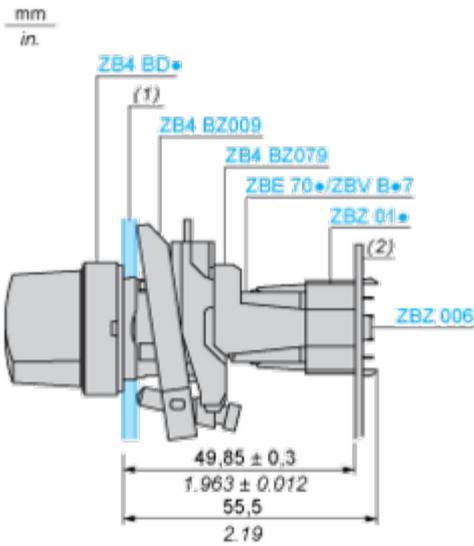

(1) Panel

(2) Printed circuit board



**Mounting of Adapter (Socket) ZBZ 01•**

- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole  $\varnothing 2.4 \text{ mm} \pm 0.05 / 0.09 \text{ in.} \pm 0.002$  for centring adapter ZBZ 01•
- 3  $8 \times \varnothing 1.2 \text{ mm} / 0.05 \text{ in.}$  holes
- 4 1 hole  $\varnothing 2.9 \text{ mm} \pm 0.05 / 0.11 \text{ in.} \pm 0.002$ , for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes  $\varnothing 2.4 \text{ mm} / 0.09 \text{ in.}$  for clipping in adapter ZBZ 01•

Dimensions An + 18.1 relate to the  $\varnothing 2.4 \text{ mm} \pm 0.05 / 0.09 \text{ in.} \pm 0.002$  holes for centring adapter ZBZ 01•.

Technical Illustration

Dimensions

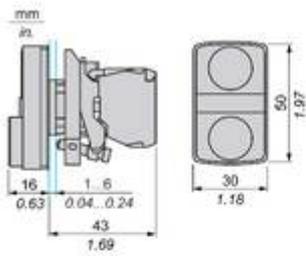

|           |           | a (mm) | a (in.) | b (mm) | b (in.) |
|-----------|-----------|--------|---------|--------|---------|
|           |           | 40     | 1.57    | 30     | 1.18    |
| ZBE.....  | ZBV.....  |        |         |        |         |
|           |           | 45     | 1.77    | 32     | 1.26    |
| ZBE.....3 | ZBV.....3 |        |         |        |         |
|           |           | 40     | 1.57    | 30     | 1.18    |
| ZBE.....4 | ZBV.....4 |        |         |        |         |
|           |           | 50     | 1.97    | 30     | 1.18    |
| ZBE.....5 | ZBV.....5 |        |         |        |         |
|           |           | 40     | 1.57    | 30     | 1.18    |
| ZBE.....9 | ZBV.....9 |        |         |        |         |
|           |           | 40     | 1.57    | 30     | 1.18    |
| ZBRT•     | ZBRV1     |        |         |        |         |

Offer Marketing Illustration

Product benefits / Features

---

### Features

Harmony XB4/XB5 Illuminated functions



NEW universal LED  
Block for all colors



Simple stock  
management



Simple stock  
management



Improved installation  
time and easy  
selection






Improved color  
intensity and  
brightness

Offer Marketing Illustration

Product benefits / Features

---

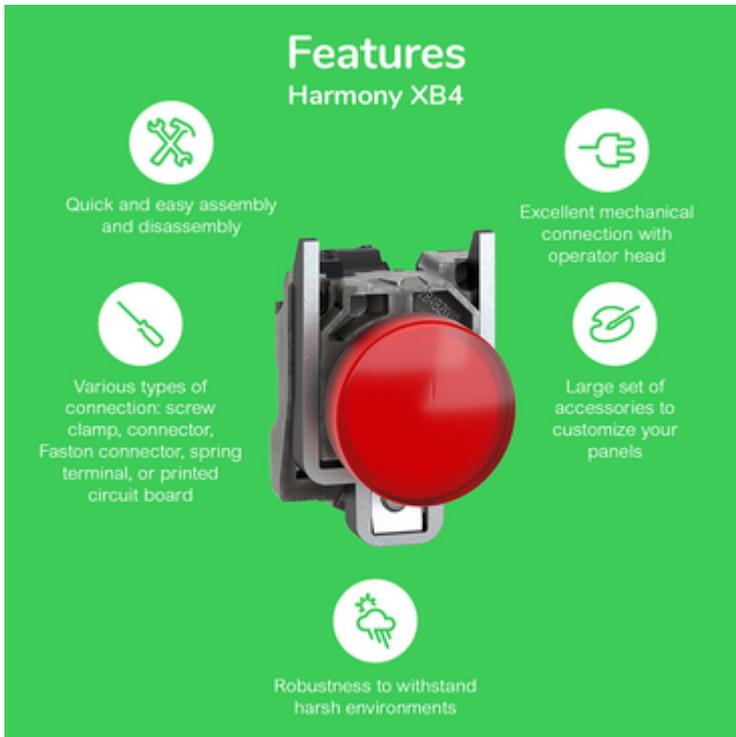

The infographic features a central image of a red Schneider XB4 circuit breaker. It is surrounded by five circular icons, each with a corresponding text description of a feature. The background is a solid green color.

### Features Harmony XB4

-  Quick and easy assembly and disassembly
-  Various types of connection: screw clamp, connector, Faston connector, spring terminal, or printed circuit board
-  Excellent mechanical connection with operator head
-  Large set of accessories to customize your panels
-  Robustness to withstand harsh environments

Offer Marketing Illustration

Product benefits / Features

---

## Technical Benefits

### Harmony XB4

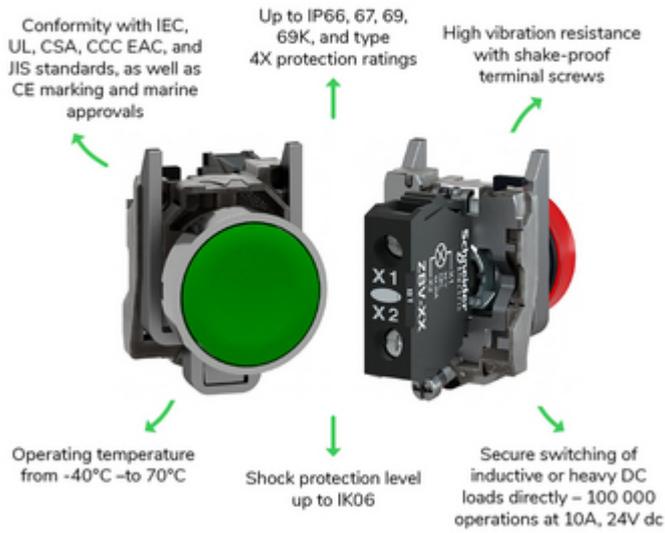


Image of product / Alternate images

Alternative

---



