

XB5KS2G4

Annunciator, Harmony XB5, Illuminated buzzer, plastic, red, 22mm, continuous or intermittent tone, 110...120V AC DC



Main

Range of Product	Harmony XB5
Product or Component Type	Annunciator
Bezel material	Plastic
Mounting diameter	0.9 in (22.5 mm)
Cap/operator or lens colour	Red

Complementary

Supply circuit type	AC/DC
Supply frequency	50/60 Hz
Signalling type	Continuous or intermittent tone
Noise level	90 dB 6.8 kHz 0.1 m +/- 10 %
Resistance to high pressure washer	1305.3 psi (9000000 Pa) 176 °F (80 °C) 0.1 m
Height	1.1 in (29 mm)
Width	1.1 in (29 mm)
Depth	2.2 in (55 mm)
Net Weight	0.053 lb(US) (0.024 kg)
Current Consumption	<= 20 mA
[Us] rated supply voltage	110...120 V +/- 10 %

Environment

Protective treatment	TH
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Ambient Air Temperature for Operation	-40...158 °F (-40...70 °C)
Overvoltage category	Class II IEC 60536
NEMA Degree of Protection	NEMA 13 NEMA 4X
Standards	UL 508 JIS C8201-5-1 IEC 60947-5-4 CSA C22.2 No 14 IEC 60947-5-1 IEC 60947-1 JIS C8201-1 IEC 60529 IEC 62262 IEC 50102
Product Certifications	UL Listed[RETURN]CSA[RETURN]BV

Ordering and shipping details

Category	US10CS200028
Discount Schedule	0CS2
GTIN	3606481352446
Returnability	Yes
Country of origin	ID


Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.3 in (3.4 cm)
Package 1 Width	1.3 in (3.4 cm)
Package 1 Length	2.4 in (6 cm)
Package 1 Weight	1.0 oz (28 g)
Unit Type of Package 2	S01
Number of Units in Package 2	88
Package 2 Height	5.9 in (15 cm)
Package 2 Width	5.9 in (15 cm)
Package 2 Length	15.7 in (40 cm)
Package 2 Weight	6.08 lb(US) (2.76 kg)
Unit Type of Package 3	P06
Number of Units in Package 3	1408
Package 3 Height	27.6 in (70 cm)
Package 3 Width	23.6 in (60 cm)
Package 3 Length	31.5 in (80 cm)
Package 3 Weight	94.834 lb(US) (43.016 kg)

Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	 REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions

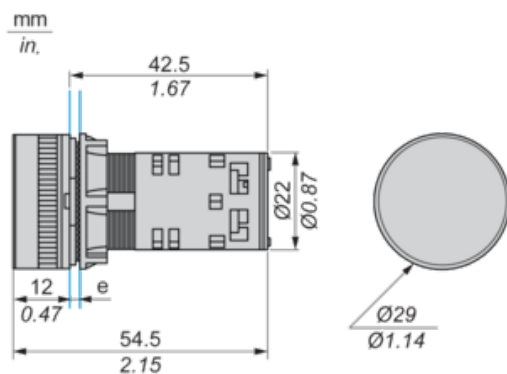

e: Clamping thickness: 1 to 6 mm / 0.04 to 0.24 in.

Panel Cut-out for Buzzer


Connection by Screw Clamp Terminals



- (1) Diameter on finished panel or support
- (2) Ø22.5 mm recommended ($\text{Ø}22.3 \text{ }_0^{+0.4}$) / Ø0.89 in. recommended ($\text{Ø}0.88 \text{ in. }_0^{+0.016}$)

Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18

Cabling of Annunciators

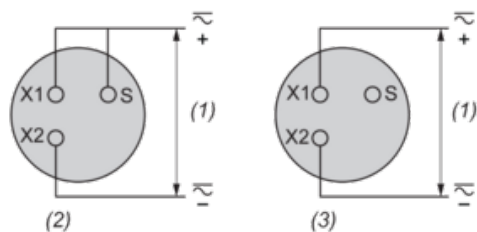

- (1) Supply
- (2) Intermittent
- (3) Continuous