

# Product data sheet

Specifications



Illuminated monolithic push button,  
Harmony XB6E, square white flush,  
16mm, spring return, 24V DC, 1CO

XB6ECW1B1P

## Main

Range of product	Harmony XB6E
Product or component type	Illuminated monolithic push-button
Device short name	XB6E
Bezel material	Plastic
Mounting diameter	16 mm
Sale per indivisible quantity	5
Shape of signaling unit head	Square
Type of operator	spring return
Operator profile	White flush
Contacts type and composition	1 C/O
Contact operation	Snap action
Connections - terminals	Insulated faston, connection size: 2.8 x 0.5 mm Solder terminal, clamping capacity: <= 0.75 mm <sup>2</sup> AWG 19 Fast connector socket
Contacts material	Gold-flashed silver
Light source	Integral LED
[Us] rated supply voltage	24 V DC polarised

## Complementary

Net weight	0.006 kg
Operating position	Any position
Marking	CE
Mechanical durability	1000000 cycles
Contact resistance	50 mOhm at 1/6 V
Short-circuit protection	2 A cartridge fuse type gG
[Ith] conventional free air thermal current	3 A (fast connector socket) 5 A
[Ie] rated operational current	1.5 A at 120 V, AC-12 conforming to IEC 60947-5-1 1 A at 240 V, AC-12 conforming to IEC 60947-5-1 1 A at 24 V, DC-12 conforming to IEC 60947-5-1 0.7 A at 24 V, DC-13 conforming to IEC 60947-5-1 0.2 A at 125 V, DC-12 conforming to IEC 60947-5-1 0.15 A at 125 V, DC-13 conforming to IEC 60947-5-1
Electrical durability	100000 cycles, AC, 0.7 A at 220 V conforming to IEC 60947-5-1 appendix C
Signalling type	Steady

<b>Current consumption</b>	10 mA
----------------------------	-------

<b>Service life</b>	30000 h
---------------------	---------

## Environment

<b>Ambient air temperature for storage</b>	-40...70 °C
<b>Ambient air temperature for operation</b>	-10...55 °C
<b>IP degree of protection</b>	IP65 conforming to IEC 60529
<b>Standards</b>	UL 508 IEC 60947-1 CSA C22.2 No 14 JIS C 852 IEC 60947-5-1 JIS C 4520
<b>Product certifications</b>	CCC cURus
<b>Vibration resistance</b>	1 mm (f= 10...55 Hz) conforming to IEC 60068-2-6
<b>Shock resistance</b>	10 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	3.000 cm
<b>Package 1 Width</b>	9.000 cm
<b>Package 1 Length</b>	10.000 cm
<b>Package 1 Weight</b>	12.000 g
<b>Unit Type of Package 2</b>	BB1
<b>Number of Units in Package 2</b>	5
<b>Package 2 Height</b>	3.000 cm
<b>Package 2 Width</b>	9.000 cm
<b>Package 2 Length</b>	20.000 cm
<b>Package 2 Weight</b>	60.000 g
<b>Unit Type of Package 3</b>	S01
<b>Number of Units in Package 3</b>	50
<b>Package 3 Height</b>	15.000 cm
<b>Package 3 Width</b>	15.000 cm
<b>Package 3 Length</b>	40.000 cm
<b>Package 3 Weight</b>	846.000 g

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Total lifecycle Carbon footprint 5

Environmental Disclosure [Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic No

[EU RoHS Directive](#) Pro-active compliance (Product out of EU RoHS legal scope)

California proposition 65 WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](#)

## Use Again

### Repack and remanufacture

End of life manual availability [End of Life Information](#)


Take-back No

WEEE Label ☒ The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

## Dimensions Drawings

Pushbutton

## Square Head

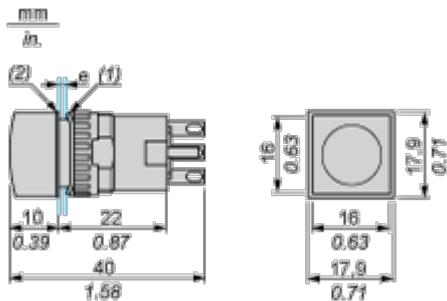

(1) Anti-rotation plate (thickness: 0.6 mm / 0.02 in.)

(2) Seal (thickness: 0.5 mm / 0.01 in.)

e panel thickness: 0.5 mm (0.01 in.)  $\leq e \leq$  6 mm (0.24 in.)

## Mounting and Clearance

Panel Cut-Out and Mounting

## Circular or Square Head

