

# Product data sheet

Specifications



**Illuminated monolithic push button,  
Harmony XB6E, square yellow flush,  
16mm, spring return, 24V DC, 2CO**

XB6ECW5B2P

**Product availability: Non-Stock - Not normally stocked in distribution facility**

## Main

Range of Product	Harmony XB6E
Product or Component Type	Illuminated monolithic push-button
Device short name	XB6E
Bezel material	Plastic
Mounting diameter	0.6 in (16 mm)
Sale per indivisible quantity	5
Shape of signaling unit head	Square
Type of operator	spring return
Operator profile	Yellow flush
Contacts type and composition	2 C/O
Contact operation	Snap action
Connections - terminals	Insulated faston 2.8 x 0.5 mm Solder terminal <= 0.75 mm <sup>2</sup> AWG 19 Fast connector socket
Contacts material	Gold-flashed silver
Light source	Integral LED
[Us] rated supply voltage	24 V DC polarised

## Complementary

Net Weight	0.013 lb(US) (0.006 kg)
Operating position	Any position
Marking	CE
Mechanical durability	1000000 cycles
Contact resistance	50 mOhm 1/6 V
Short-circuit protection	2 A cartridge fuse gG
[Ith] conventional free air thermal current	3 A fast connector socket) 5 A
[Ie] rated operational current	1.5 A 120 V, AC-12 IEC 60947-5-1 1 A 240 V, AC-12 IEC 60947-5-1 1 A 24 V, DC-12 IEC 60947-5-1 0.7 A 24 V, DC-13 IEC 60947-5-1 0.2 A 125 V, DC-12 IEC 60947-5-1 0.15 A 125 V, DC-13 IEC 60947-5-1
Electrical durability	100000 cycles, AC, 0.7 A 220 V IEC 60947-5-1 appendix C
Signalling type	Steady

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Current Consumption	10 mA
---------------------	-------

Service life	30000 h
--------------	---------

## Environment

Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
-------------------------------------	----------------------------

Ambient Air Temperature for Operation	14...131 °F (-10...55 °C)
---------------------------------------	---------------------------

IP degree of protection	IP65 IEC 60529
-------------------------	----------------

Standards	JIS C 852 CSA C22.2 No 14 JIS C 4520 IEC 60947-5-1 UL 508 IEC 60947-1
-----------	--

Product Certifications	CCC cURus
------------------------	--------------

Vibration resistance	1 mm (f= 10...55 Hz) conforming to IEC 60068-2-6
----------------------	--

Shock resistance	10 gn 11 ms) half sine wave acceleration IEC 60068-2-27
------------------	---

## Ordering and shipping details

Category	US10CS222459
Discount Schedule	0CS2
GTIN	3389110627725
Returnability	Yes
Country of origin	CN

## Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.18 in (3.000 cm)
Package 1 Width	3.54 in (9.000 cm)
Package 1 Length	3.94 in (10.000 cm)
Package weight(Lbs)	0.423 oz (12.000 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	5
Package 2 Height	1.18 in (3.000 cm)
Package 2 Width	3.54 in (9.000 cm)
Package 2 Length	7.87 in (20.000 cm)
Package 2 Weight	2.187 oz (62.000 g)
Unit Type of Package 3	S01
Number of Units in Package 3	50
Package 3 Height	5.91 in (15.000 cm)
Package 3 Width	5.91 in (15.000 cm)
Package 3 Length	15.75 in (40.000 cm)
Package 3 Weight	30.547 oz (866.000 g)

## Contractual warranty

---

Warranty

18 months



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) **1**

Environmental Disclosure [Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging without single use plastic **No**

[EU RoHS Directive](#) **Pro-active compliance (Product out of EU RoHS legal scope)**

California proposition 65   
**WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](#)**

## Use Again

### Repack and remanufacture

Circularity Profile [End of Life Information](#)


Take-back **No**

WEEE   
 **The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.**

## Dimensions Drawings

Pushbutton

## Square Head

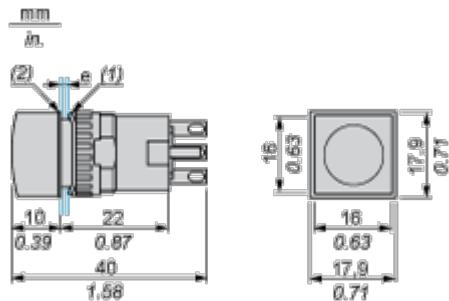

(1) Anti-rotation plate (thickness: 0.6 mm / 0.02 in.)

(2) Seal (thickness: 0.5 mm / 0.01 in.)

e panel thickness: 0.5 mm (0.01 in.)  $\leq$  e  $\leq$  6 mm (0.24 in.)

## Mounting and Clearance

## Panel Cut-Out and Mounting

## **Circular or Square Head**

