

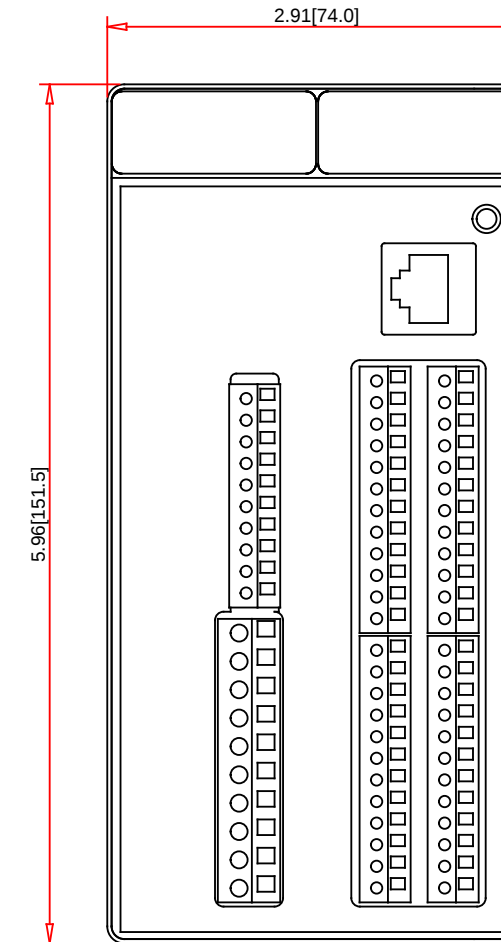


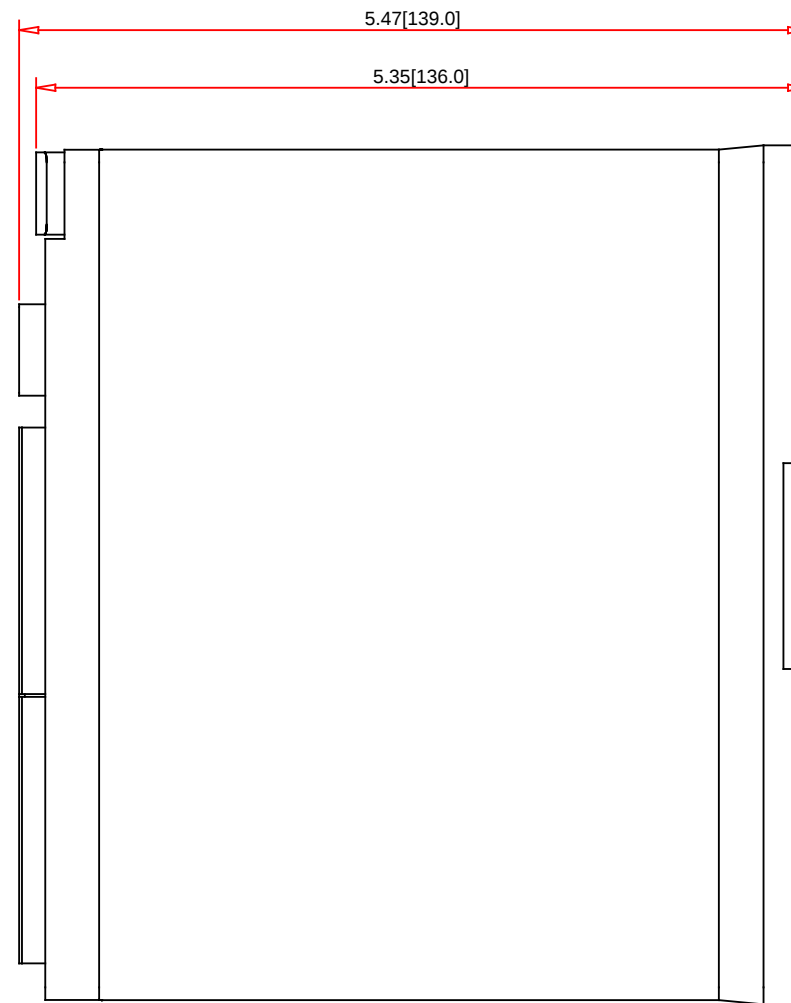

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
XPSMC32ZP

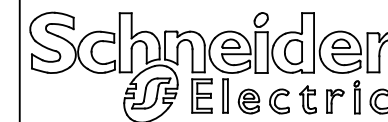

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 877 342 5173
Email: CCC@us.schneider-electric.com

UL File/CCN: E164353 / NKCR
CSA File/Class: LR44087 / 3211 03
CE: Yes
RoHS: Yes

Technical Information:

Description:
Voltage: 24 VDC
Terminal Type: Screw or Spring
Terminal Block: Removable
Safety Contacts - Standard: 6 Solid State, 2 Relay Outputs with two contacts each
Safety Contacts - Time Delay: Via Internal Timers
Auxiliary Contacts:
Solid State Outputs:
Timing Range:

Specification: