

Product data sheet

Specifications



Base Module, Harmony XV6, Ø60mm Modular Tower Light, 24V AC/DC base with Wall Mount Adapter, Cover Included, Dark Grey Body Color

XV6C21BL

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony XV6
Product or Component Type	Base module
Device Composition	Base + wall mount adapter & cover
Device short name	XV6
Mounting diameter	2.4 in (60 mm)
Electrical Connection	24V
Device mounting	Wall mounted
Mounting position	Upright/inverted
Assembly style	Up to 5 Modules (4 lens + 1 sound or 5 lens)
Material	Polycarbonate
Housing Colour	Dark grey
Net Weight	0.205 lb(US) (0.093 kg)

Complementary

[Ue] rated operational voltage	24 V AC 50/60 Hz 24 V DC
Rated operational voltage limits	21.6...26.4 V AC/DC
Electrical shock protection class	Class III
Connections - terminals	Spring clamp terminals (push 'n stay), 6 x 0.25...6 x 1.5 mm ² with cable end Spring clamp terminals (push 'n stay), 6 x 0.25...6 x 1.5 mm ² without cable end
cable entry	Side entry
[Ui] Rated Insulation Voltage	50 V
[Uimp] rated impulse withstand voltage	500 V

Environment

Pollution degree	2
Ambient Air Temperature for Operation	-13...122 °F (-25...50 °C)
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
IP Degree of Protection	IP65
Environmental Type ratings	Type 12

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Vibration resistance	6 gn +/- 0.5 mm 10...500 Hz)in operation
Shock resistance	20 gn 11 ms) in operation
Standards	UL 60947-5-1 IEC 60947-5-1 CSA C22.2 No 60947-5-1
Product Certifications	cULus CCC RCM UKCA CE

Ordering and shipping details

Category	US10CS222608
Discount Schedule	0CS2
GTIN	3606487129707
Returnability	Yes
Country of origin	DE

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.756 in (7.000 cm)
Package 1 Width	2.953 in (7.500 cm)
Package 1 Length	5.118 in (13.000 cm)
Package weight(Lbs)	4.162 oz (118.000 g)
Unit Type of Package 2	S03
Number of Units in Package 2	30
Package 2 Height	11.811 in (30.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	8.818 lb(US) (4.000 kg)
Unit Type of Package 3	P06
Number of Units in Package 3	240
Package 3 Height	29.528 in (75.000 cm)
Package 3 Width	23.622 in (60.000 cm)
Package 3 Length	31.496 in (80.000 cm)
Package 3 Weight	87.083 lb(US) (39.500 kg)

Contractual warranty

Warranty (in months)	18
-----------------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) 1

Environmental Disclosure [Product Environmental Profile](#)

Use Better



Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic Yes

[EU RoHS Directive](#) Compliant with Exemptions

REACH Regulation [REACH Declaration](#)

California proposition 65 **WARNING:** This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer



Lifetime extension

Repair No

Use Again



Repack and remanufacture


Circularity Profile [End of Life Information](#)

Take-back No

WEEE Label  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.


Dimensions Drawings

Dimensions

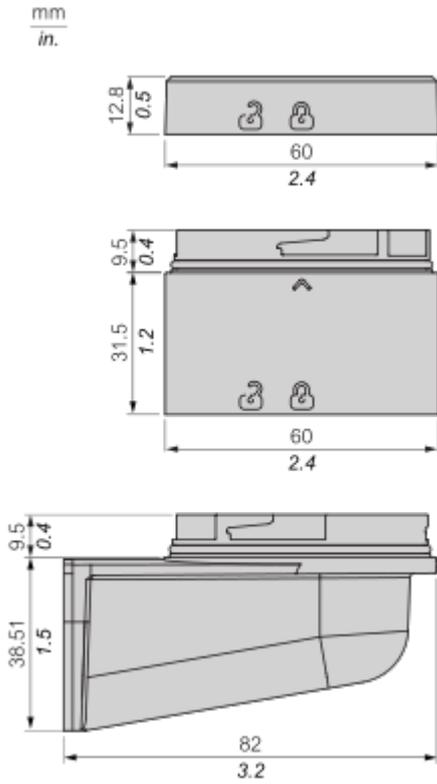

Mounting and Clearance

Mounting Overview

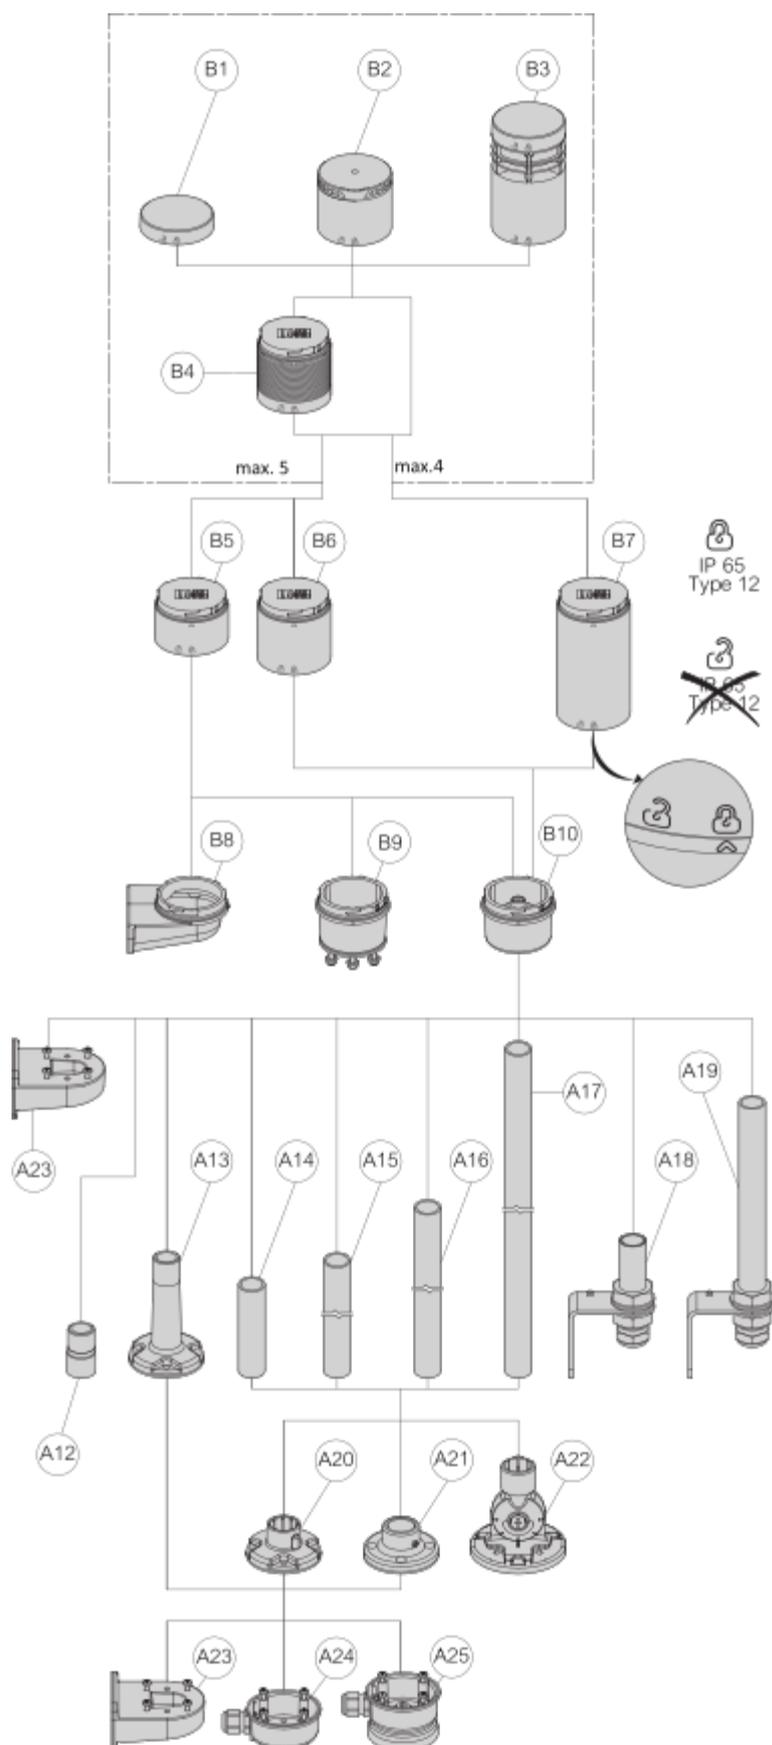


Configurations	Part Number	Part Description
----------------	-------------	------------------

B1, B5, B8	XV6C21BL•	24V Base With Wall Adapter & Cover
B1, B5, B9	XV6C21BP•	24V Base With 3-Pin & Cover
B1, B5, B10	XV6C21B•	24V Base Direct/ Tube & Cover
B1, B6, B10	XV6C51W	USB Direct/ Tube & Cover
B1, B7, B10	XV6C21M	AC Base Direct/ Tube & Cover
B2	XV6C9S•	Buzzer 2 Tones
	XV6C9T•	Buzzer 8 Tones
B3	XV6C9V•	Editable Voice Alarm
B4	XV6C2•	Steady Lens
	XV6C2•C	Steady Clear Lens
	XV6C5•	Blinking Lens
	XV6C6•	Flashing Lens
	XV6C29	Steady Clear Lens (Multi Colored)
A12	XVZ00	1/2" NPT Adapter
A13	XVZ02•	Plastic Fixing Plate With Pole
A14	XVZ100	Alu Ø25mm Pole 100mm Length
A15	XVZ250	Alu Ø25mm Pole 250mm Length
A16	XVZ400	Alu Ø25mm Pole 400mm Length
A17	XVZ800	Alu Ø25mm Pole 800mm Length
A18	XVZ100T	L Bracket Alu Ø25mm Pole 100mm
A19	XVZ250T	L Bracket Alu Ø25mm Pole 250mm
A20	XVZ01•	Plastic Fixing Plate
A21	XVZ11	Metal Fixing Plate
A22	XVZ06•	Plastic Foldable Bracket
A23	XVZ09	Plastic Wall Mount Bracket
A24	XVZ07	Side Entry Adapter
A25	XVZ08	Magnetic Adapter


Connections and Schema

Wiring

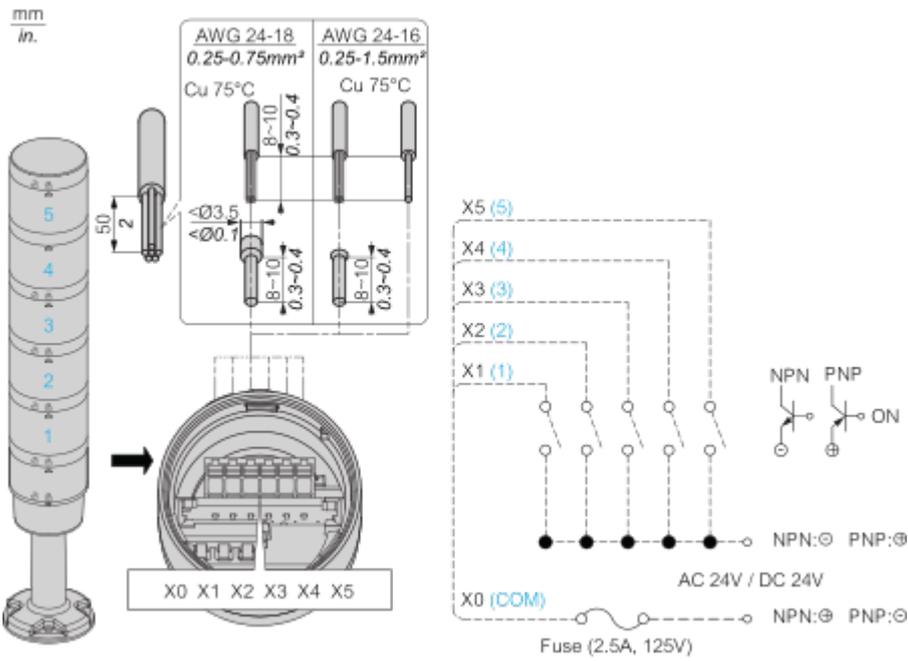


Technical Illustration

Dimensions

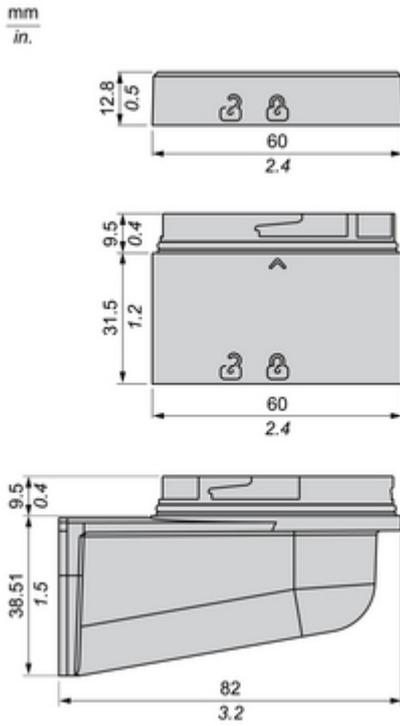

Technical Illustration

Wiring diagram

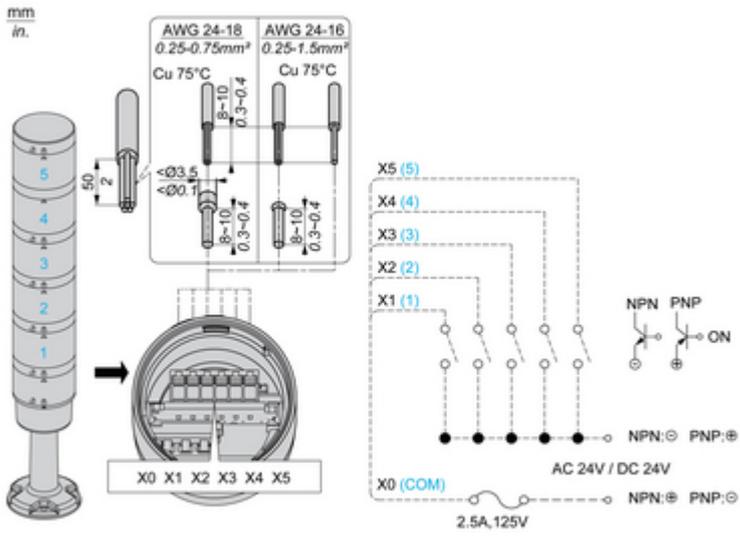

Offer Marketing Illustration

Product benefits / Features

Technical Features

Harmony XV6 Modular Tower Light

60mm tower light with modular construction

Rated up to IP65 for protection against dust and water

6 color, 4 clear and 1 multi-color lens options



3 buzzer options with up to 95dB sound output

Comes in dark grey and white body color

6 mounting options, including wall, magnetic, and foldable designs

Offer Marketing Illustration

Product benefits / Features

Modular Tower Light Harmony XV6

The illustration shows four different configurations of the Modular Tower Light. From left to right: a tall stack of five colored modules (red, orange, green, blue, grey), a shorter stack of three modules (black, red, black), a single module on a tall silver pole, and a single module on a shorter silver pole. Each configuration is surrounded by a green circular icon and a text description of a feature.

- 60mm modular tower light** (Icon: Ruler)
- Fit for harsh environments** (Icon: Shield with lightning bolt)
- Wide voltage compatibility with simplified base options, including a USB base** (Icon: Lightning bolt)
- Modern design with minimum glare and high visibility** (Icon: Eye)
- 360° Omni sound buzzer options** (Icon: Speaker)
- Multiple mounting options for ease of use** (Icon: Wrench and screwdriver)

Image of product / Alternate images

Alternative





