

# Product data sheet

Specifications



Indicator bank, Harmony XVB,  
illuminated unit, plastic, blue, 70mm,  
steady, bulb or LED not included,  
250V

XVBC36

! Discontinued

! Discontinued on: Jun 30, 2025

**Product availability: Stock - Normally stocked in distribution facility**

## Main

Range of Product	Harmony XVB Universal
Product or Component Type	Indicator bank
Beacon or indicator bank unit type	Illuminated unit
Signalling type	Steady
Mounting diameter	2.8 in (70 mm)
Component name	XVBC
Material	Polycarbonate
Light source	Bulb not included, blue
Bulb type	Incandescent BA 15d Protected LED
[Us] rated supply voltage	<= 250 V

## Complementary

Assembly style	Customer assembly, up to 5 units
Maximum power dissipation in W	7 W
Connections - terminals	Screw clamp terminals, <= 1 x 1.5 mm <sup>2</sup> with cable end
[Ui] rated insulation voltage	250 V IEC 60947-1
Nominal voltage limit	0.85...1.1 Un IEC 60947-5-1
[Uimp] rated impulse withstand voltage	4 kV IEC 60947-1
CAD overall width	2.8 in (70 mm)
CAD overall height	2.5 in (63 mm)
CAD overall depth	2.8 in (70 mm)

## Environment

Pollution degree	2
Product Certifications	CCC EAC CSA C22-2 No 14 UL 508
Standards	IEC 60947-5-1

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>Protective treatment</b>	TC
<b>Ambient Air Temperature for Storage</b>	-40...158 °F (-40...70 °C)
<b>Ambient air temperature for operation</b>	-13...122 °F (-25...50 °C) LED -13...158 °F (-25...70 °C) incandescent
<b>Electrical shock protection class</b>	Class I on support tube IEC 61140 Class II on base unit IEC 61140
<b>IP degree of protection</b>	IP65 on fixing base XVBZ0. IEC 60529 IP66 on base unit IEC 60529
<b>NEMA degree of protection</b>	Type 4X UL indoor)

## Ordering and shipping details

<b>Category</b>	US100XV22611
<b>Discount Schedule</b>	00XV
<b>GTIN</b>	3389110845099
<b>Returnability</b>	Yes

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Nbr. of units in pkg.</b>	1
<b>Package 1 Height</b>	3.07 in (7.800 cm)
<b>Package 1 Width</b>	4.17 in (10.600 cm)
<b>Package 1 Length</b>	5.67 in (14.400 cm)
<b>Package weight(Lbs)</b>	4.762 oz (135.000 g)
<b>Unit Type of Package 2</b>	S03
<b>Number of Units in Package 2</b>	36
<b>Package 2 Height</b>	11.81 in (30.000 cm)
<b>Package 2 Width</b>	11.81 in (30.000 cm)
<b>Package 2 Length</b>	15.75 in (40.000 cm)
<b>Package 2 Weight</b>	12.427 lb(US) (5.637 kg)

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)	73
--	----

## Use Better

### Materials and Substances

Packaging made with recycled cardboard	Yes
--	-----

Packaging without single use plastic	Yes
--------------------------------------	-----

<a href="#">EU RoHS Directive</a>	Pro-active compliance (Product out of EU RoHS legal scope)
-----------------------------------	--

SCIP Number	D2b770b5-0c26-43b8-9686-bd198ab76258
-------------	--------------------------------------

REACH Regulation	<a href="#">REACH Declaration</a>
------------------	-----------------------------------

California proposition 65	<b>WARNING:</b> This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
---------------------------	--

## Use Again

### Repack and remanufacture

Circularity Profile	No need of specific recycling operations
---------------------	--

Take-back	No
-----------	----


WEEE	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
------	--

Dimensions Drawings

Indicator Bank without “Flash” Discharge Tube Unit

Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

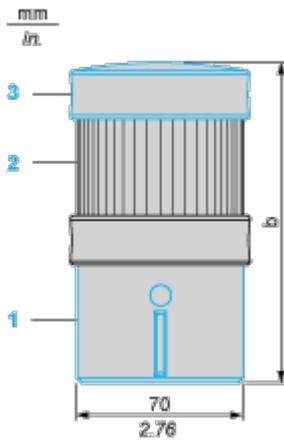

- (1) Base unit XVBC21, to be ordered separately
- (2) Illuminated or audible signalling unit
- (3) Cover (supplied with XVBC21 base unit)


Number of illuminated or audible signalling units (no “flash”)	b in mm	b in in.
1	138	5.43
2	201	7.91
3	264	10.39
4	327	12.87
5	390	15.35

**Indicator Bank with “Flash” Discharge Tube Unit**

---

**Dimensions**

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

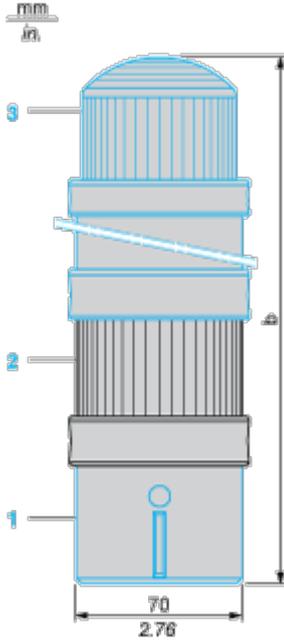

- (1) Base unit XVBC07, to be ordered separately
- (2) Illuminated or audible signalling unit
- (3) “Flash” unit, to be ordered separately

Number of illuminated or audible signalling units other than “flash” tube	b in mm	b in in.
1	295	11.61
2	358	14.09
3	421	16.57
4	484	19.06



Offer Marketing Illustration

Product benefits / Features

---

### Features Harmony XVB



**3 types of light source:**  
10-Watt incandescent bulb,  
built-in high-efficiency  
LEDs, 5 and 10-joule  
discharge tube

100,000 hours of  
maintenance-free lighting  
thanks to "LED Protected"  
technology

Connector with  
removable base, axial,  
or side cable entry,  
immediate assembly, and  
fixing using a locking ring

High degree of protection  
(IP66) and Shock  
resistance (IK05)

Fully flexible and interchangeable  
construction of up to 5 lens units  
(six colors of light lens unit)

Offer Marketing Illustration

Product benefits / Features

---

## Technical Benefits

Harmony XVB

Robust product performance with high IP protection and IK05 shock resistance



Greater loudness up to 90dB with continuous and intermittent tones



Conformity with International standards



Beacon lens on top with high intensity 5J, 10J Xenon flash, increase visibility from top and surrounding



Image of product / Alternate images

Alternative

---

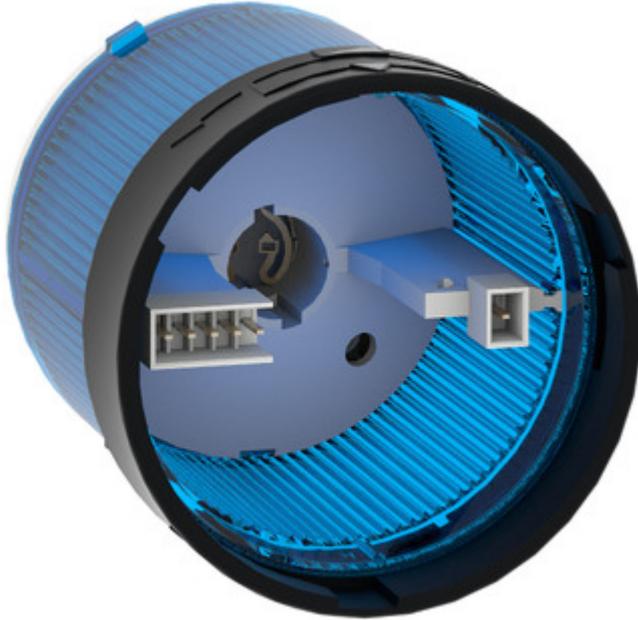




Image of product in real life situation

