

# Product data sheet

Specifications



Monolithic precabled tower light,  
Harmony XVC, plastic, red orange  
green, 40mm, tube mounting,  
steady, IP23, 24V AC DC

XVC4B3

⚠ To be discontinued on: May 31, 2026

⚠ To be discontinued

## Main

Range of product	Harmony XVC4
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	3 illuminated units
Sound signalling	Without
Mounting diameter	40 mm
Component name	XVC
Device short name	XVC
Light source	LED steady red LED steady orange LED steady green
Supply circuit type	AC/DC

## Complementary

Material	Polycarbonate: illuminated unit ABS (acrylonitrile butadiene-styrene): base unit PBT + ABS (UL94HB): top cover SGP (chromium-plated): support tube
Mounting location	On support tube, 17 mm
Product mounting	On support tube, 17 mm
[Us] rated supply voltage	24 V
[Us] rated supply voltage	24 V
Cable cross section	0.33 mm <sup>2</sup>
AWG gauge	AWG 22
Cable length	600 mm
Marking	CE
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	75 mA
Flashing frequency	1 Hz
Net weight	0.54 kg
Height	473.5 mm

## Environment

<b>Standards</b>	IEC 61000-6-3 IEC 61000-6-2
<b>Product certifications</b>	UL
<b>Protective treatment</b>	TC
<b>Ambient air temperature for storage</b>	-35...70 °C
<b>Ambient air temperature for operation</b>	-10...50 °C
<b>Electrical shock protection class</b>	Class I conforming to IEC 61140
<b>Overvoltage category</b>	Class I conforming to IEC 61140
<b>IP degree of protection</b>	IP23 vertical surface installation conforming to IEC 60529

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	6.800 cm
<b>Package 1 Width</b>	6.800 cm
<b>Package 1 Length</b>	75.200 cm
<b>Package 1 Weight</b>	758.000 g
<b>Unit Type of Package 2</b>	BB1
<b>Number of Units in Package 2</b>	10
<b>Package 2 Height</b>	17.500 cm
<b>Package 2 Width</b>	37.000 cm
<b>Package 2 Length</b>	77.500 cm
<b>Package 2 Weight</b>	8.684 kg
<b>Unit Type of Package 3</b>	P06
<b>Number of Units in Package 3</b>	20
<b>Package 3 Height</b>	75.000 cm
<b>Package 3 Width</b>	60.000 cm
<b>Package 3 Length</b>	80.000 cm
<b>Package 3 Weight</b>	25.368 kg

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Total lifecycle Carbon footprint	61
----------------------------------	----

## Use Better

### Materials and Substances

Packaging made with recycled cardboard	Yes
--	-----

Packaging without single use plastic	Yes
--------------------------------------	-----

[EU RoHS Directive](#)

Pro-active compliance (Product out of EU RoHS legal scope)

California proposition 65

**WARNING:** This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## Use Again

### Repack and remanufacture


Take-back	No
-----------	----

Dimensions Drawings

**Pre-assembled and Pre-wired Tower Light with Support Tube Mounting**

**Dimensions**

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

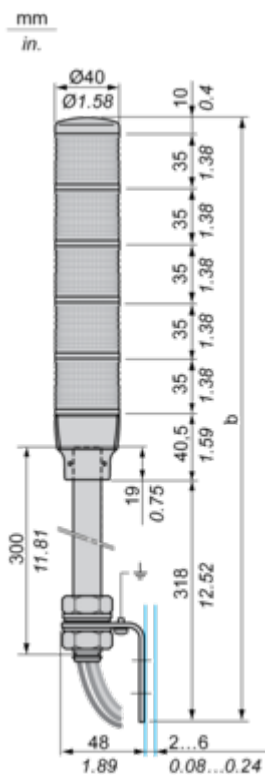

No. of illuminated units	b Without buzzer (mm)	b Without buzzer (in.)
1 stage	403.50	15.89
2 stages	438.50	17.26
3 stages	473.50	18.64
4 stages	508.50	20.02
5 stages	543.50	21.40

Mounting and Clearance

Pre-assembled and Pre-wired Tower Light

---

Support Tube Mounting

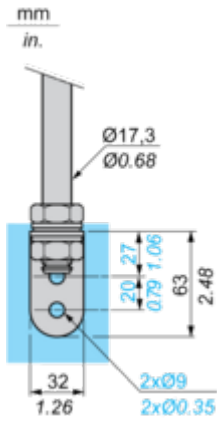




Image of product / Alternate images

Alternative

---





