

# Product data sheet

Specifications



Complete body contact assembly, Harmony XB4, single contact block with body fixing collar, 1NC spring clamp terminal

ZB4BZ1029

Product availability: Stock - Normally stocked in distribution facility

## Main

|                               |  |
|-------------------------------|--|
| Range of Product              | Harmony XB4  |
| Product or Component Type     | Complete body/contact assembly   |
| Device short name             | ZB4  |
| Fixing collar material        | Zamak  |
| Sale per indivisible quantity | 1  |
| Head type                     | Standard   |
| Contacts type and composition | 1 NC   |
| Contact operation             | Slow-break   |
| Contact block type            | Single   |
| Device Composition            | Fixing collar<br>Contact block   |
| Connections - terminals       | Screw clamp terminals, $\leq 2 \times 1.5 \text{ mm}^2$ with cable end IEC 60947-1<br>Screw clamp terminals, $\geq 1 \times 0.22 \text{ mm}^2$ without cable end IEC 60947-1 |

## Complementary

|  |  |
|--|--|
| CAD overall width  | 1.2 in (30 mm)   |
| CAD overall height                                       | 1.9 in (47 mm)   |
| CAD overall depth  | 1.5 in (37 mm)   |
| Terminals description ISO n°1                            | (11-12)NC  |
| Net Weight   | 0.141 lb(US) (0.064 kg)  |
| Contacts usage   | Standard contacts  |
| Positive opening   | With IEC 60947-5-1 appendix K  |
| Operating travel   | 0.06 in (1.5 mm) NC changing electrical state)<br>0.1 in (2.6 mm) NO changing electrical state)<br>0.2 in (4.3 mm) total travel) |
| Operating torque   | 0.44 lbf.in (0.05 N.m) NO changing electrical state  |
| Mechanical durability                                    | 5000000 cycles   |
| Contacts material  | Silver alloy (Ag/Ni)   |
| Short-circuit protection                                 | 4 A cartridge fuse gG IEC 60947-5-1  |
| [I <sub>th</sub> ] conventional free air thermal current | 10 A IEC 60947-5-1   |
| [U <sub>i</sub> ] rated insulation voltage               | 250 V 3)IEC 60947-1  |
| [U <sub>imp</sub> ] rated impulse withstand voltage      | 4 kV IEC 60947-1   |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

|                                       |   |
|---------------------------------------|---|
| <b>[Ie] rated operational current</b> | 3 A 240 V, AC-15, A300 IEC 60947-5-1<br>6 A 120 V, AC-15, A300 IEC 60947-5-1<br>0.1 A 250 V, DC-13, R300 IEC 60947-5-1<br>0.22 A 125 V, DC-13, R300 IEC 60947-5-1   |
| <b>Electrical durability</b>          | 1000000 cycles, AC-15, 1 A 230 V 3600 cyc/h 0.5 IEC 60947-5-1 appendix C<br>1000000 cycles, AC-15, 1.5 A 120 V 3600 cyc/h 0.5 IEC 60947-5-1 appendix C<br>1000000 cycles, AC-15, 3 A 24 V 3600 cyc/h 0.5 IEC 60947-5-1 appendix C<br>1000000 cycles, DC-13, 0.15 A 110 V 3600 cyc/h 0.5 IEC 60947-5-1 appendix C<br>1000000 cycles, DC-13, 0.4 A 24 V 3600 cyc/h 0.5 IEC 60947-5-1 appendix C |
| <b>Electrical reliability</b>         | $\Lambda < 10\exp(-6)$ 5 V, 1 mA in clean environment IEC 60947-5-4<br>$\Lambda < 10\exp(-8)$ 17 V, 5 mA in clean environment IEC 60947-5-4   |

## Environment

|  |   |
|--|---|
| <b>Protective treatment</b>                  | TH  |
| <b>Ambient Air Temperature for Storage</b>   | -40...158 °F (-40...70 °C)  |
| <b>Ambient Air Temperature for Operation</b> | -13...158 °F (-25...70 °C)  |
| <b>IP degree of protection</b>               | IP20 IEC 60529  |
| <b>Standards</b>                             | IEC 60947-1<br>CSA C22.2 No 14<br>IEC 60947-5-5<br>IEC 60947-5-4<br>IEC 60947-5-1<br>UL 508<br>JIS C8201-5-1<br>JIS C8201-1 |
| <b>Product Certifications</b>                | BV<br>UL<br>CSA<br>DNV<br>LROS (Lloyds register of shipping)  |
| <b>Vibration resistance</b>                  | 5 gn ( $f= 2 \dots 500$ Hz) conforming to IEC 60068-2-6   |
| <b>Shock resistance</b>                      | 30 gn 18 ms) half sine wave acceleration IEC 60068-2-27<br>50 gn 11 ms) half sine wave acceleration IEC 60068-2-27          |

## Ordering and shipping details

|                          |               |
|--------------------------|---------------|
| <b>Category</b>          | US10CS222469  |
| <b>Discount Schedule</b> | 0CS2          |
| <b>GTIN</b>              | 3606480502415 |
| <b>Returnability</b>     | Yes           |
| <b>Country of origin</b> | FR            |

## Packing Units

|                                     |                    |
|-------------------------------------|--------------------|
| <b>Unit Type of Package 1</b>       | PCE                |
| <b>Nbr. of units in pkg.</b>        | 1                  |
| <b>Package 1 Height</b>             | 1.77 in (4.5 cm)   |
| <b>Package 1 Width</b>              | 1.38 in (3.5 cm)   |
| <b>Package 1 Length</b>             | 2.05 in (5.2 cm)   |
| <b>Package weight(Lbs)</b>          | 1.8 oz (52.0 g)    |
| <b>Unit Type of Package 2</b>       | S03                |
| <b>Number of Units in Package 2</b> | 200                |
| <b>Package 2 Height</b>             | 11.81 in (30.0 cm) |

---

|                         |                         |
|-------------------------|-------------------------|
| <b>Package 2 Width</b>  | 11.81 in (30.0 cm)      |
| <b>Package 2 Length</b> | 15.75 in (40.0 cm)      |
| <b>Package 2 Weight</b> | 23.88 lb(US) (10.83 kg) |

---

## **Contractual warranty**

---

|                 |           |
|-----------------|-----------|
| <b>Warranty</b> | 18 months |
|-----------------|-----------|



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) 1

Environmental Disclosure [Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic Yes

[EU RoHS Directive](#) Pro-active compliance (Product out of EU RoHS legal scope)

REACH Regulation [REACH Declaration](#)

California proposition 65 **WARNING:** This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## Use Again

### Repack and remanufacture

Circularity Profile [End of Life Information](#)

Take-back No

WEEE  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.


Offer Marketing Illustration

Product benefits / Features

---

## Technical Benefits


### Harmony XB4

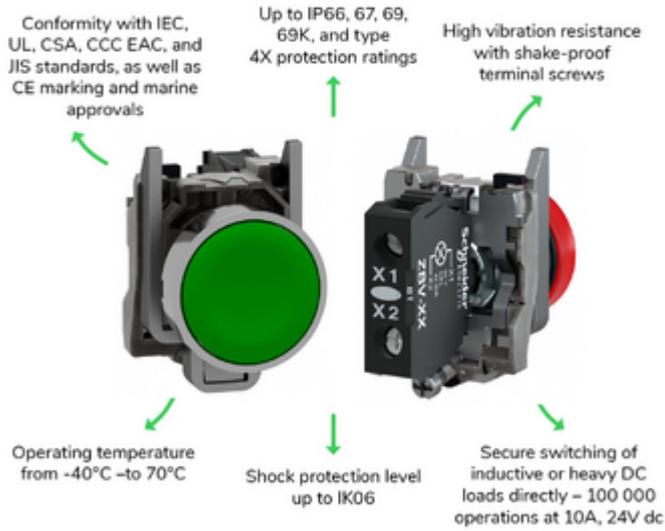

Offer Marketing Illustration

Product benefits / Features

---

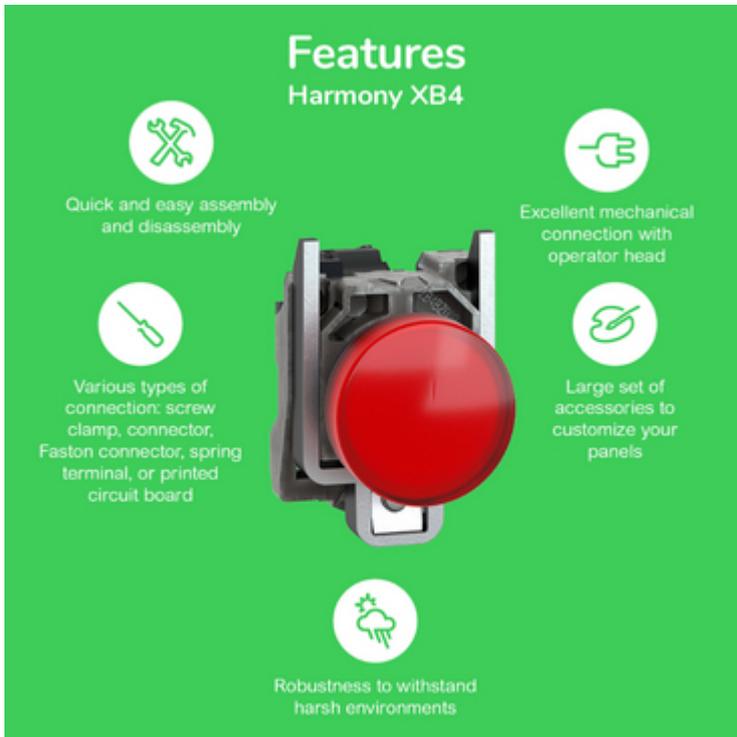

The infographic features a central image of a red push-button switch. Surrounding this central image are five circular icons, each with a corresponding text description of a feature. The background is a solid green color.

### Features Harmony XB4

- Quick and easy assembly and disassembly** (Icon: crossed wrench and screwdriver)
- Excellent mechanical connection with operator head** (Icon: hand holding a plug)
- Large set of accessories to customize your panels** (Icon: plug with a slash through it)
- Robustness to withstand harsh environments** (Icon: lightning bolt and rain cloud)
- Various types of connection: screw clamp, connector, Faston connector, spring terminal, or printed circuit board** (Icon: screwdriver)

Image of product / Alternate images

Alternative

---

