

Product data sheet

Specifications



Blanking plug, Harmony XB4, round, metal, chromium plated, 22mm

ZB4SZ3

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony XB4
Accessory / Separate Part Type	Blanking plug
Accessory / separate part category	Installation accessory
Product or Component Type	Blanking plug
Product Compatibility	XB4 XB5
Accessory / separate part destination	Ø 22 mm control and signalling units

Complementary

Material	Metal
Head type	Standard
Additional information	Fixing collar ZB4BZ009 required for mounting must be ordered separately
Sale per indivisible quantity	10
Net Weight	0.051 lb(US) (0.023 kg)
Shape of signaling unit head	Round
Type of operator	standard handle

Ordering and shipping details

Category	US10CS222469
Discount Schedule	0CS2
GTIN	3389110099577
Returnability	Yes
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	0.906 in (2.300 cm)
Package 1 Width	1.181 in (3.000 cm)
Package 1 Length	1.181 in (3.000 cm)
Package weight(Lbs)	0.917 oz (26.000 g)
Unit Type of Package 2	BB1

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Number of Units in Package 2	10
Package 2 Height	3.543 in (9.000 cm)
Package 2 Width	2.756 in (7.000 cm)
Package 2 Length	2.756 in (7.000 cm)
Package 2 Weight	9.771 oz (277.000 g)
Unit Type of Package 3	S03
Number of Units in Package 3	400
Package 3 Height	11.811 in (30.000 cm)
Package 3 Width	11.811 in (30.000 cm)
Package 3 Length	15.748 in (40.000 cm)
Package 3 Weight	25.399 lb(US) (11.521 kg)

Contractual warranty

Warranty	18 months
-----------------	-----------



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) 1

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic Yes

[EU RoHS Directive](#) Pro-active compliance (Product out of EU RoHS legal scope)

SCIP Number 425812e5-011f-4fb4-ad1b-fc9cf9865300

REACH Regulation [REACH Declaration](#)

California proposition 65 **WARNING:** This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again


Repack and remanufacture

Circularity Profile No need of specific recycling operations

Take-back No

Offer Marketing Illustration

Product benefits / Features

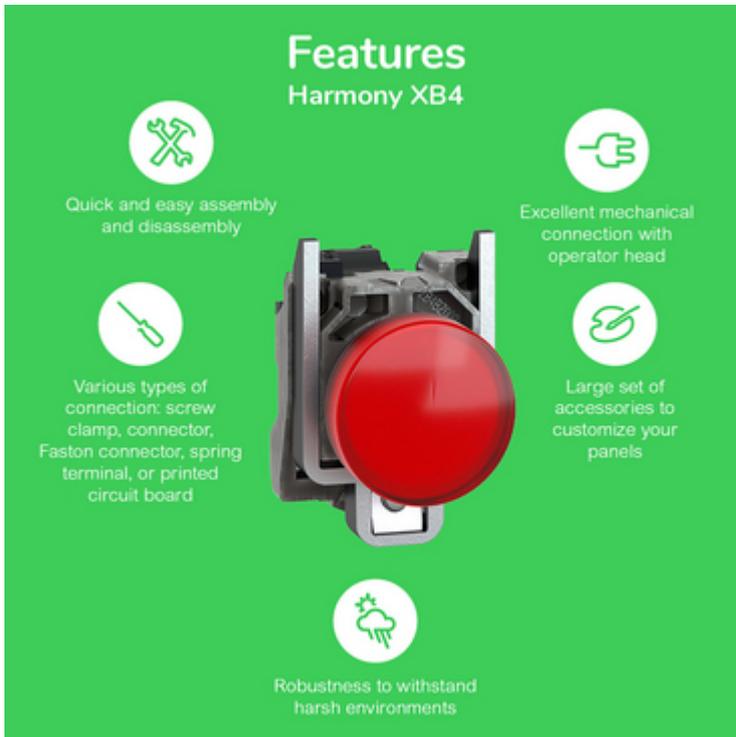

The infographic features a central image of a red Schneider XB4 circuit breaker. Surrounding it are five circular icons, each with a corresponding text block describing a feature. The background is a solid green color.

Features Harmony XB4

- Quick and easy assembly and disassembly** (Icon: crossed wrench and screwdriver)
- Excellent mechanical connection with operator head** (Icon: hand holding a plug)
- Large set of accessories to customize your panels** (Icon: plug with a slash through it)
- Robustness to withstand harsh environments** (Icon: lightning bolt and rain cloud)
- Various types of connection: screw clamp, connector, Faston connector, spring terminal, or printed circuit board** (Icon: screwdriver)

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony XB4

Conformity with IEC, UL, CSA, CCC EAC, and JIS standards, as well as CE marking and marine approvals

Up to IP66, 67, 69, 69K, and type 4X protection ratings

High vibration resistance with shake-proof terminal screws



Operating temperature from -40°C to 70°C

Shock protection level up to IK06

Secure switching of inductive or heavy DC loads directly – 100 000 operations at 10A, 24V dc

Image of product / Alternate images

Alternative



