

Product data sheet

Specifications



Complete body for illuminated push button, Harmony XB6, green light block, with body fixing collar, integral LED, 12...24V, 1NO + 1NC

ZB6ZB35B

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony XB6
Product or Component Type	Complete body for illuminated push-button
Device short name	ZB6
Fixing collar material	Plastic
Sale per indivisible quantity	1
Contacts type and composition	1 NO + 1 NC
Contact operation	Slow-break
Connections - terminals	Faston connector 2.8 x 0.5 mm
Light source	LED
Bulb base	Integral LED
Light source colour	Green
[Us] rated supply voltage	12...24 V AC/DC

Complementary

CAD overall width	0.9 in (24 mm)
CAD overall height	0.7 in (18 mm)
CAD overall depth	2.008 in (51 mm)
Terminals description ISO n°1	(11-12)NC
Net Weight	0.020 lb(US) (0.009 kg)
Contacts usage	Standard
Positive opening	With IEC 60947-5-1 appendix K
Operating travel	0.04 in (1 mm) NC changing electrical state 0.08 in (2 mm) NO changing electrical state 0.2 in (4.3 mm) total travel)
Operating force	1.6 N NO changing electrical state 2.5 N NC changing electrical state
Contacts material	Silver alloy (Ag/Ni)
Short-circuit protection	6 A cartridge fuse gG IEC 60947-5-1
[Ui] rated insulation voltage	250 V 3)IEC 60947-1
[Uimp] rated impulse withstand voltage	4 kV IEC 60947-1

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

[Ie] rated operational current	3 A 120 V, AC-15, B300 1.5 A 240 V, AC-15, B300 0.1 A 250 V, DC-13, R300 0.22 A 125 V, DC-13, R300
Electrical durability	1000000 cycles, AC-15, 2 A 230 V 3600 cyc/h 0.5 IEC 60947-5-1 appendix C 1000000 cycles, DC-15, 2 A 230 V 3600 cyc/h 0.5 IEC 60947-5-1 appendix C
Electrical reliability	$\Lambda = 10\exp(-8)$ 5 V 1 mA with confidence level of 90 % IEC 60947-5-4
Signalling type	Steady
Supply voltage limits	6...30 V AC/DC
Current Consumption	15 mA
Surge withstand	1 kV direct contact IEC 61000-4-5 2 kV in free air IEC 61000-4-5

Environment

Protective treatment	TC
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Ambient Air Temperature for Operation	-13...158 °F (-25...70 °C)
Electrical shock protection class	Class II conforming to IEC 61140
Standards	JIS C 852 IEC 60947-5-5 UL 508 IEC 60947-1 JIS C 4520 IEC 60947-5-1 CSA C22.2 No 14
Product Certifications	GOST CSA CCC UL
Vibration resistance	+/- 3 mm (f= 2...500 Hz) conforming to IEC 60068-2-6 5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6
Shock resistance	30 gn 18 ms) half sine wave acceleration IEC 60068-2-27 50 gn 11 ms) half sine wave acceleration IEC 60068-2-27
Resistance to fast transients	2 kV IEC 61000-4-4
Resistance to electromagnetic fields	9.1 V/m (10 V/m) IEC 61000-4-3
Resistance to electrostatic discharge	6 kV on contact (on metal parts) IEC 61000-2-6 8 kV in free air (in insulating parts) IEC 61000-2-6
Electromagnetic emission	Class B IEC 55011

Ordering and shipping details

Category	US10CS222459
Discount Schedule	0CS2
GTIN	3389110784442
Returnability	Yes
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1

Package 1 Height	0.8 in (2.0 cm)
Package 1 Width	3.9 in (10.0 cm)
Package 1 Length	3.1 in (8.0 cm)
Package weight(Lbs)	0.4 oz (11.0 g)
Unit Type of Package 2	S01
Number of Units in Package 2	80
Package 2 Height	5.9 in (15.0 cm)
Package 2 Width	5.9 in (15.0 cm)
Package 2 Length	15.7 in (40.0 cm)
Package 2 Weight	2.31 lb(US) (1.05 kg)

Contractual warranty

Warranty	18 months
-----------------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) 14

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic No

[EU RoHS Directive](#) Pro-active compliance (Product out of EU RoHS legal scope)

SCIP Number 7e93e493-8304-40e7-9b39-3ac9fc039df4

California proposition 65 **WARNING:** This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

Repack and remanufacture

Circularity Profile [End of Life Information](#)


Take-back No

WEEE Label  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings

Body for Illuminated Pushbutton

Dimensions

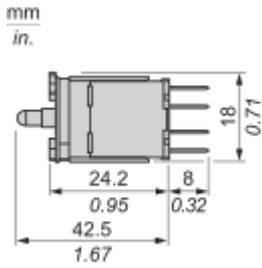

Technical Illustration

Dimensions

mm
in.

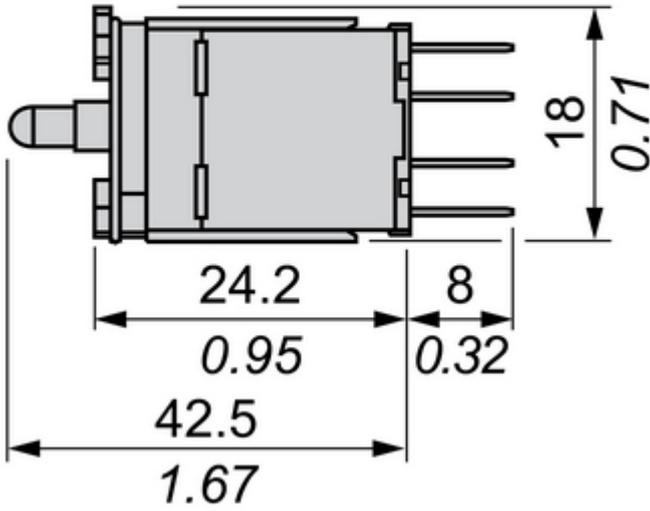


Image of product / Alternate images

Alternative





