



Figure similar

Non-reversing motor starter Size 1 Three phase full voltage Solid-state overload relay OLRelay amp range 10-40a 208VAC 60HZ coil Combination type 60Amp fusible disconnect 60Amp / 250V fuse clip Enclosure NEMA type 1 Indoor general purpose use Standard width enclosure

| General technical data                                       |                          |
|--------------------------------------------------------------|--------------------------|
| Weight [lb]                                                  | 34 lb                    |
| Height x Width x Depth [in]                                  | 24 × 11 × 8 in           |
| Protection against electrical shock                          | NA for enclosed products |
| Installation altitude [ft] at height above sea level maximum | 6560 ft                  |
| Ambient temperature [°F] during storage                      | -22 ... +149 °F          |
| Ambient temperature [°F] during operation                    | -4 ... +104 °F           |
| Ambient temperature during storage                           | -30 ... +65 °C           |
| Ambient temperature during operation                         | -20 ... +40 °C           |
| Country of origin                                            | USA                      |

| Horsepower ratings                                           |        |
|--------------------------------------------------------------|--------|
| Yielded mechanical performance [hp] for three-phase AC motor |        |
| • at 200/208 V rated value                                   | 7.5 hp |
| • at 220/230 V rated value                                   | 7.5 hp |
| • at 460/480 V rated value                                   | 0 hp   |

- at 575/600 V rated value

0 hp

## Contactors

|                                                                         |          |
|-------------------------------------------------------------------------|----------|
| Number of NO contacts for main contacts                                 | 3        |
| Operating voltage for main current circuit at AC at 60 Hz maximum       | 600 V    |
| Operating current at AC at 600 V rated value                            | 27 A     |
| Mechanical service life (switching cycles) of the main contacts typical | 10000000 |

## Auxiliary contact

|                                                                   |                                     |
|-------------------------------------------------------------------|-------------------------------------|
| Number of NC contacts at contactor for auxiliary contacts         | 0                                   |
| Number of NO contacts at contactor for auxiliary contacts         | 1                                   |
| Number of total auxiliary contacts maximum                        | 8                                   |
| Contact rating of auxiliary contacts of contactor according to UL | 10A@600VAC (A600), 5A@600VDC (P600) |

## Coil

|                                                                          |               |
|--------------------------------------------------------------------------|---------------|
| Type of voltage of the control supply voltage                            | AC            |
| Control supply voltage                                                   |               |
| • at DC rated value                                                      | 0 ... 0 V     |
| • at AC at 60 Hz rated value                                             | 208 ... 208 V |
| • at AC at 50 Hz rated value                                             | 0 ... 0 V     |
| Holding power at AC minimum                                              | 8.6 W         |
| Apparent pick-up power of magnet coil at AC                              | 218 V·A       |
| Apparent holding power of magnet coil at AC                              | 25 V·A        |
| Operating range factor control supply voltage rated value of magnet coil | 0.85 ... 1.1  |
| Percental drop-out voltage of magnet coil related to the input voltage   | 50 %          |
| Switch-on delay time                                                     | 19 ... 29 ms  |
| Off-delay time                                                           | 10 ... 24 ms  |

## Overload relay

|                           |                                      |
|---------------------------|--------------------------------------|
| Product function          |                                      |
| • Overload protection     | Yes                                  |
| • Phase failure detection | Yes                                  |
| • Phase unbalance         | Yes                                  |
| • Ground fault detection  | Yes                                  |
| • Test function           | Yes                                  |
| • External reset          | Yes                                  |
| Reset function            | Manual, automatic and remote         |
| (trip class)              | Class 5 / 10 / 20 (factory set) / 30 |

|                                                                                                                                                                              |                                    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|
| Adjustable pick-up value current of the current-dependent overload release                                                                                                   | 10 ... 40 A                        |
| Trip time at phase-loss maximum                                                                                                                                              | 3 s                                |
| Relative repeat accuracy                                                                                                                                                     | 1 %                                |
| Product feature Protective coating on printed-circuit board                                                                                                                  | Yes                                |
| Number of NC contacts of auxiliary contacts of overload relay                                                                                                                | 1                                  |
| Number of NO contacts of auxiliary contacts of overload relay                                                                                                                | 1                                  |
| Operating current of auxiliary contacts of overload relay <ul style="list-style-type: none"> <li>• at AC at 600 V</li> <li>• at DC at 250 V</li> </ul>                       | 5 A<br>1 A                         |
| Contact rating of auxiliary contacts of overload relay according to UL                                                                                                       | 5A@600VAC (B600), 1A@250VDC (R300) |
| Insulation voltage <ul style="list-style-type: none"> <li>• with single-phase operation at AC rated value</li> <li>• with multi-phase operation at AC rated value</li> </ul> | 600 V<br>300 V                     |

#### Disconnect Switch

|                                              |                    |
|----------------------------------------------|--------------------|
| Rated response values of switch disconnecter | 60A / 250V         |
| Design of fuse holder                        | Class R fuse clips |
| Operating class of the fuse link             | Class R            |

#### Enclosure

|                                                   |                            |
|---------------------------------------------------|----------------------------|
| Degree of protection NEMA rating of the enclosure | NEMA Type 1                |
| Design of the housing                             | Indoor general purpose use |

#### Mounting/wiring

|                                                                                                                       |                                   |
|-----------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| (mounting position)                                                                                                   | vertical                          |
| (mounting type)                                                                                                       | Surface mounting and installation |
| Type of electrical connection for supply voltage line-side                                                            | Box lug                           |
| Tightening torque [lbf·in] for supply                                                                                 | 35 ... 35 lbf·in                  |
| Type of connectable conductor cross-sections at line-side at AWG conductors single or multi-stranded                  | 1x (14 ... 2 AWG)                 |
| Temperature of the conductor for supply maximum permissible                                                           | 75 °C                             |
| Material of the conductor for supply                                                                                  | AL or CU                          |
| Type of electrical connection for load-side outgoing feeder                                                           | Screw-type terminals              |
| Tightening torque [lbf·in] for load-side outgoing feeder                                                              | 35 ... 35 lbf·in                  |
| Type of connectable conductor cross-sections at AWG conductors for load-side outgoing feeder single or multi-stranded | 1x (14 ... 2 AWG)                 |

|                                                                                                                                  |                                                     |
|----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
| Temperature of the conductor for load-side outgoing feeder maximum permissible                                                   | 75 °C                                               |
| Material of the conductor for load-side outgoing feeder                                                                          | AL or CU                                            |
| Type of electrical connection of magnet coil                                                                                     | Screw-type terminals                                |
| Tightening torque [lbf·in] at magnet coil                                                                                        | 5 ... 12 lbf·in                                     |
| Type of connectable conductor cross-sections of magnet coil at AWG conductors single or multi-stranded                           | 2x (16 ... 12 AWG)                                  |
| Temperature of the conductor at magnet coil maximum permissible                                                                  | 75 °C                                               |
| Material of the conductor at magnet coil                                                                                         | CU                                                  |
| Type of electrical connection for auxiliary contacts                                                                             | Screw-type terminals                                |
| Tightening torque [lbf·in] at contactor for auxiliary contacts                                                                   | 10 ... 15 lbf·in                                    |
| Type of connectable conductor cross-sections at contactor at AWG conductors for auxiliary contacts single or multi-stranded      | 1x (12 AWG), 2x (16 ... 14 AWG), 2x (18 ... 16 AWG) |
| Temperature of the conductor at contactor for auxiliary contacts maximum permissible                                             | 75 °C                                               |
| Material of the conductor at contactor for auxiliary contacts                                                                    | CU                                                  |
| Type of electrical connection at overload relay for auxiliary contacts                                                           | Screw-type terminals                                |
| Tightening torque [lbf·in] at overload relay for auxiliary contacts                                                              | 7 ... 10 lbf·in                                     |
| Type of connectable conductor cross-sections at overload relay at AWG conductors for auxiliary contacts single or multi-stranded | 2x (20 ... 14 AWG)                                  |
| Temperature of the conductor at overload relay for auxiliary contacts maximum permissible                                        | 75 °C                                               |
| Material of the conductor at overload relay for auxiliary contacts                                                               | CU                                                  |

#### Short-circuit current rating

|                                                                                   |                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------|
| Design of the fuse link for short-circuit protection of the main circuit required | 10kA@600V (Class H or K); 100kA@600V (Class R or J) |
|-----------------------------------------------------------------------------------|-----------------------------------------------------|

#### Further information

##### Industrial Controls - Product Overview (Catalogs, Brochures,...)

[www.usa.siemens.com/iccatalog](http://www.usa.siemens.com/iccatalog)

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:17DUE92BD12>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/US/en/ps/US2:17DUE92BD12>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=US2:17DUE92BD12&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:17DUE92BD12&lang=en)


##### Certificates/approvals

<https://support.industry.siemens.com/cs/US/en/ps/US2:17DUE92BD12/certificate>

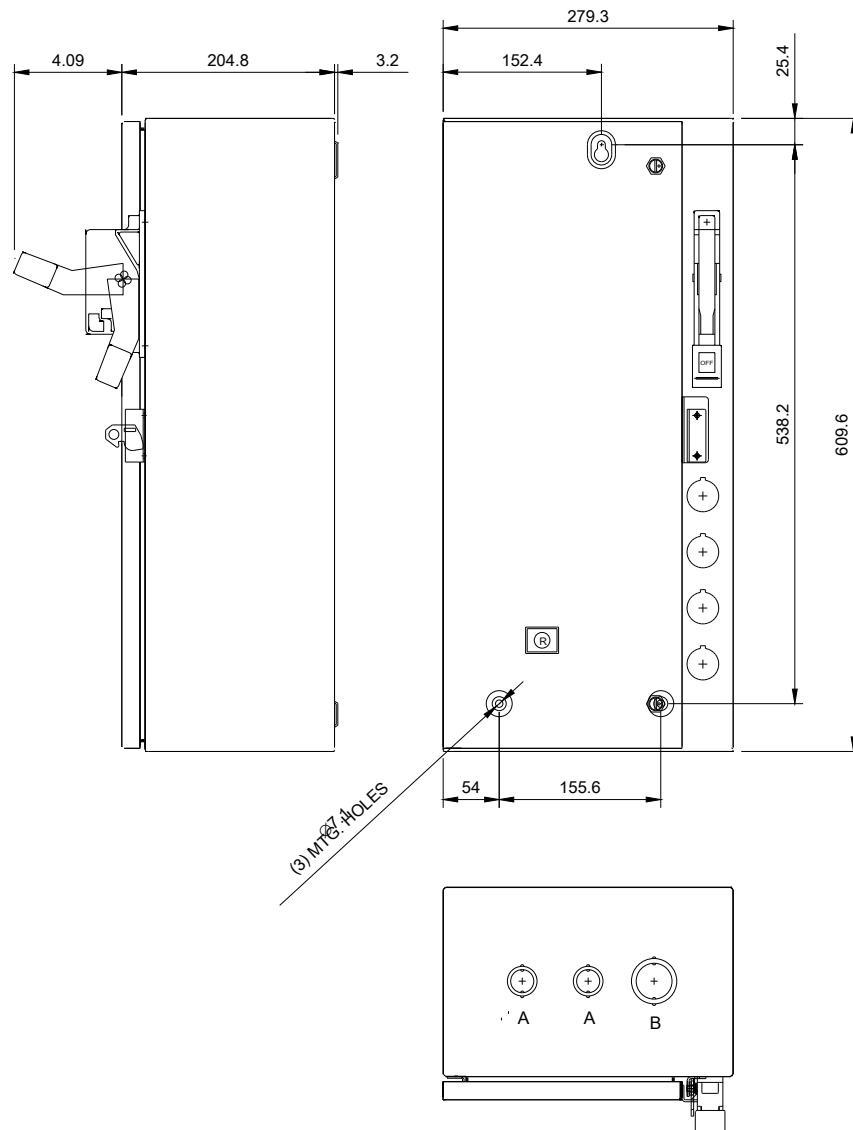

\\CONDUITS TYP. TOP & BOTTOM

| LETTER | CONDUIT SIZE            |
|--------|-------------------------|
| A      | %%C12.7 & %%C19 CONDUIT |
| B      | Ø25.4 & Ø31.8 CONDUIT   |

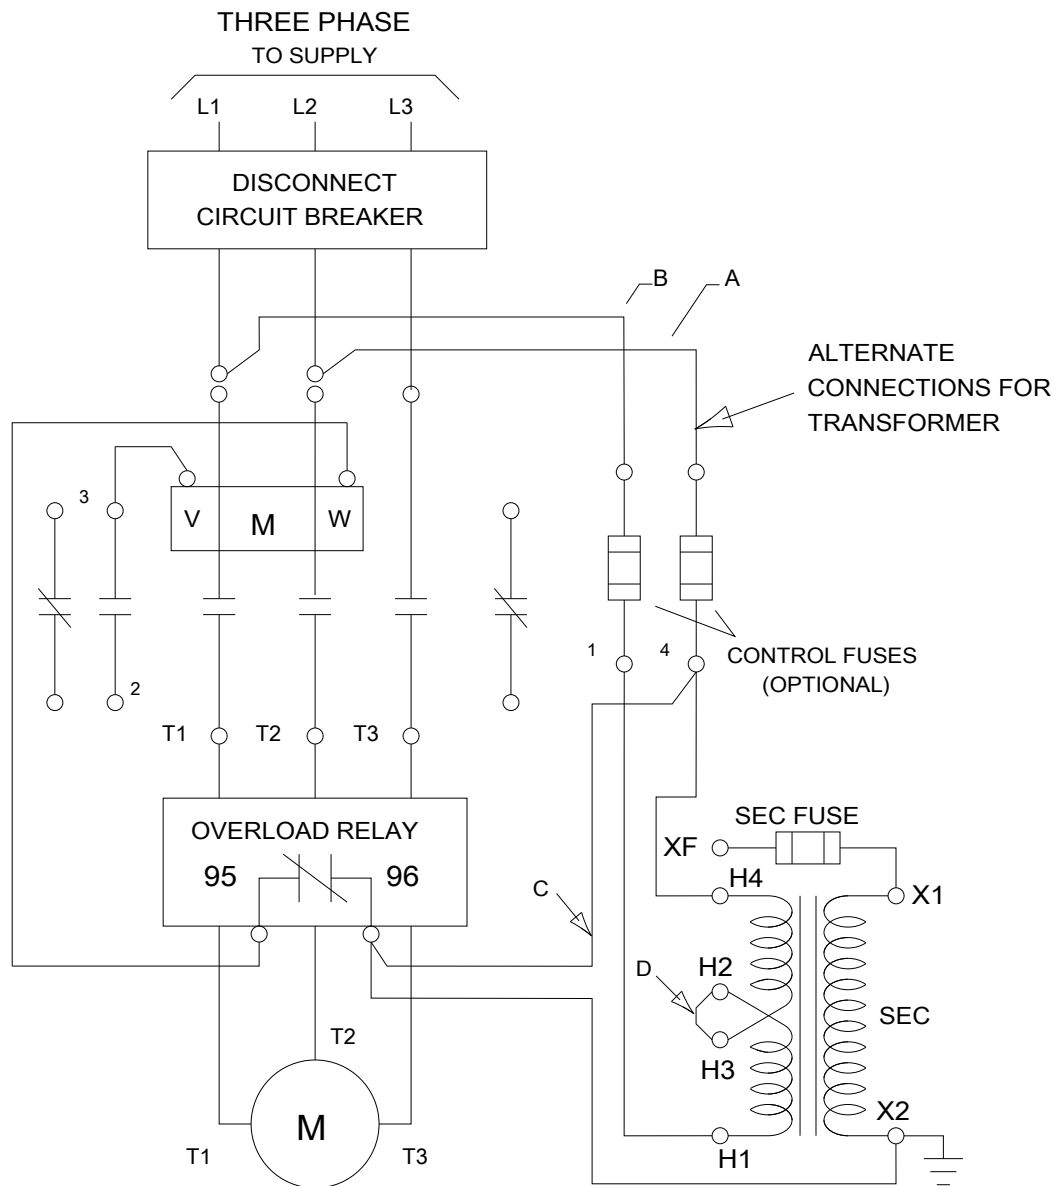

D68782001

last modified:

05/08/2019