

SIEMENS



SENTRON

3LD Main Control and EMERGENCY-STOP Switches

Catalog
Extract
LV 10

Edition
10/2017

siemens.com/switching-devices

Related catalogs

Low-Voltage Power Distribution and Electrical Installation Technology LV 10
 SENTRON • SIVACON • ALPHA
 Protection, Switching, Measuring and Monitoring
 Devices, Switchboards and Distribution Systems
 PDF (E86060-K8280-A101-A4-7600)
 Print (E86060-K8280-A101-A3-7600)



3VA Molded Case Circuit Breakers with UL Certification
 SENTRON

PDF/print (E86060-K8290-A101-A2-7600)



Industrial Controls IC 10
 SIRIUS

E86060-K1010-A101-A7-7600



Industrial Communication IK PI
 SIMATIC NET

E86060-K6710-A101-B8-7600



DELTA ET D1
 Switches and Socket Outlets

PDF (E86060-K8240-A101-B7-7600)



SITRAIN
 Training for Industry

www.siemens.com/sitrain



Catalog PDF / Response E-mail

Catalog PDF

Digital versions of the catalogs are available in the Siemens Industry Online Support.

www.siemens.com/lowvoltage/catalogs



Contact

Your personal contact can be found in our Contacts Database at:

www.siemens.com/automation-contact



Industry Mall / TIA ST / CA 01

Industry Mall

Information and Ordering Platform on the Internet:

www.siemens.com/industrymall



TIA Selection Tool

for the selection, configuration and ordering of TIA products and devices

www.siemens.com/tst



Products for Automation and Drives CA 01

Interactive Catalog
 Download

https://w3.siemens.com/mcmts/topics/en/ik/complete_download/Pages/Default.aspx




Trademarks

All product designations may be registered trademarks or product names of Siemens AG or other supplying companies. Third parties using these trademarks or product names for their own purposes may infringe upon the rights of the trademark owners. Further information about low-voltage power distribution and electrical installation technology is available on the Internet at:

www.siemens.com/lowvoltage

Technical Support



Expert advice on technical questions with a wide range of demand-optimized services for all our products and systems.

www.siemens.com/lowvoltage/support-request

Low-Voltage Power Distribution and Electrical Installation Technology

Protection, Switching, Measuring and Monitoring Devices, Switchboards and Distribution Systems

SENTRON · SIVACON · ALPHA



Catalog LV 10 · 10/2017

Supersedes:
Catalog LV 10 · 2016/2017

Refer to the Industry Mall for current updates of this catalog:

www.siemens.com/industrymall

The products contained in this catalog can also be found in the Interactive Catalog CA 01.

www.siemens.com/ca01download

Please contact your local Siemens branch.

© Siemens AG 2017

Protection, Switching, Measuring and Monitoring Devices

Air Circuit Breakers	1
Molded Case Circuit Breakers	2
Miniature Circuit Breakers	3
Residual Current Protective Devices / Arc Fault Detection Devices (AFDDs)	4
Fuse Systems	5
Overvoltage Protection Devices	6
Switch Disconnectors	7
Transfer Switching Equipment and Transfer Control Devices	8
Switching Devices	9
Transformers, Power Supply Units and Socket Outlets	10
Busbar Systems	11
Measuring Devices and Power Monitoring	12
Monitoring Devices	13
8WH2 Spring-Loaded Terminals	14
Software	15
Switchboards and Distribution Systems	16
Busbar Trunking Systems	17
System Cubicles, System Lighting and System Air-Conditioning	18
Distribution Boards / Power Distribution Boards	19
Appendix	20

Opening Information

Ordering notes

Overview

Ordering special versions

When ordering products that differ from the standard versions listed in the catalog, "-Z" must be added to the Article No. indicated and the required features must be specified using alphanumeric order codes or plain text.

Ordering very small quantities

When very small orders are placed, the costs associated with order processing are greater than the order value. We therefore recommend that you combine several small orders. Where this is not possible, we regret that we are obliged to make a small processing charge: for orders with a net goods value of less than € 250 we charge an € 20 supplement to cover our order processing and invoicing costs.

Explanations of Selection and Ordering Data

Standard delivery time (SD)

SD in days (d)	The standard delivery times (SD) are valid ex works from Siemens AG (products ready for dispatch). Shipping times depend on the destination and the method of shipping. The standard shipping time for Germany is one day.	The specified standard delivery times are correct at the time of going to print and are subject to constant optimization. Up-to-date information can be found at www.siemens.com/industrymall .
► Preferred type	Preferred types are device types that can be delivered immediately ex works, i.e. they are dispatched within 24 hours. If ordered in normal quantities, the products are usually delivered within the specified delivery times, calculated from the date we receive your order. In exceptional cases, delivery times may vary from those specified.	
X On request	In such cases, the delivery time can be queried.	

Price units (PU)

The price unit defines the number of units, sets or meters to which the specified price applies.

Packaging size (PS)

The packaging size defines the number of units, sets or meters, for example, for outer packaging.
Only the quantity defined by the packaging size or a multiple thereof can be ordered.

Price group (PG)

Each product is allocated to a price group.

Example

5TT3400
SD: Preferred type
PG: 1BK
Ordering quantity 1 unit or a multiple thereof

8US1923-5CA02
PG: 1CU
Ordering quantity 10 units or a multiple thereof

8WH9000-1GA00
PG: 1BT
Ordering quantity 50 units or a multiple thereof

SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
d					
►	5TT3400		1	1 unit	1BK
	8US1923-5CA02		1	10 units	1CU
	8WH9000-1GA00		100	50 units	1BT

Note:

The article numbers shown here and the specifications regarding selection and ordering data are examples only. When ordering, always use the selection and ordering data in the product chapters.

Metal surcharges/export markings

To compensate fluctuating prices of raw materials (for example silver, copper, aluminum, lead, gold, dysprosium and neodymium), surcharges are calculated on a daily basis for products containing these raw materials using the metal factor.
A surcharge for the particular raw material is added to the price of a product if the basic quotations for this raw material are exceeded.

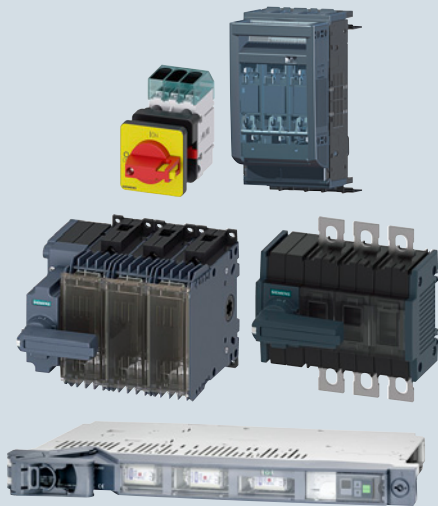
Each product's metal factor dictates for which raw materials the metal surcharges are calculated, from which quotation and with which calculation method (weight or percentage method).

An exact explanation of the metal factor can be found at www.siemens.com/automation/salesmaterial-as/catalog/en/terms_of_trade_en.pdf

A product's export markings/metal surcharges are updated daily at www.siemens.com/industrymall.

Switch Disconnectors

7



For further technical product information:

[Configuration Manual](#)

[Switch disconnectors](#)

Article No.: 3ZW1012-3NP11-0AC1

Siemens Industry Online Support:

www.siemens.com/lowvoltage/product-support

→ Entry type:
Application example
Certificate
Characteristic
Download
FAQ
Manual
Product note
Software archive
Technical data

7/2 Introduction

Fuseless switch disconnectors

3LD main control and EMERGENCY-STOP switches from 16 to 250 A

7/3 Introduction

7/4 General data

3LD3 main control and EMERGENCY-STOP switches from 16 to 63 A **NEW**

7/6 - Introduction

7/9 - Front mounting

7/12 - Floor mounting

7/14 - Distribution board mounting

7/16 - Accessories

3LD2 main control and EMERGENCY-STOP switches from 16 to 250 A

7/19 - Introduction

7/23 - Front mounting

7/28 - Floor mounting

7/34 - Distribution board mounting

7/36 - Molded-plastic enclosures

7/38 - DC applications

7/39 - Accessories

3KD switch disconnectors up to 1600 A

7/44 Introduction

7/45 General data

7/52 Technical features

7/65 Complete assemblies

7/66 Basic units

7/70 Accessories and spare parts

5TE1 switch disconnectors up to 200 A

7/82 Introduction

7/83 General data

3KA/3KE switch disconnectors up to 1000 A

7/87 Introduction

7/90 Floor mounting

7/95 Accessories

Ch.2 3VA switch disconnectors up to 250 A

3VT switch disconnectors up to 1600 A

7/98 Introduction

7/100 3VT1 switch disconnectors up to 160 A

7/105 3VT2 switch disconnectors up to 250 A

7/111 3VT3 switch disconnectors up to 630 A

7/117 3VT4 switch disconnectors up to 1000 A

7/118 3VT5 switch disconnectors up to 1600 A

Switch disconnectors with fuses

3KF switch disconnectors with fuses up to 800 A **NEW**

7/122 General data

7/130 Technical features

7/131 Introduction

7/132 Complete assemblies

7/133 Basic units

7/137 Accessories and spare parts

3KL switch disconnectors with fuses up to 800 A

7/148 Introduction

7/150 Floor mounting

7/152 Front mounting

7/153 Accessories

7/156 Fuses

3KM switch disconnectors with fuses and isolating plug connector up to 400 A

7/158 Introduction

7/160 For snapping onto busbar system

7/161 Accessories

7/163 Fuses

3NJ62 in-line switch disconnectors with fuses up to 630 A

7/165 Introduction

7/170 For LV HRC fuse links

7/172 For BS fuse links

7/174 For LV HRC and BS fuse links

7/183 Accessories

Door-coupling rotary operating mechanisms

8UD1 door-coupling rotary operating mechanisms

7/190 For 3KD and 3KF switch disconnectors

8UC7 door-coupling rotary operating mechanisms

7/194 For 3KA/3KE, 3KL, 3KM switch disconnectors

7/198 Individual parts

7/199 Operating mechanisms for fixed mounting

Fuse switch disconnectors

3NP1 fuse switch disconnectors up to 630 A

7/200 Introduction

7/203 Floor mounting

7/205 For 40 mm busbar system

7/207 For 60 mm busbar system

7/209 Accessories

7/217 Fuses

3NP5 fuse switch disconnectors up to 630 A

7/220 Introduction

7/222 Floor mounting

7/223 For 40 mm busbar system

7/224 For 60 mm busbar system

7/225 With fuse monitoring

7/228 Accessories

7/230 Fuses

3NJ4, 3NJ5 in-line fuse switch disconnectors up to 2000 A

7/233 Introduction

7/236 1-pole switchable

7/237 3-pole switchable

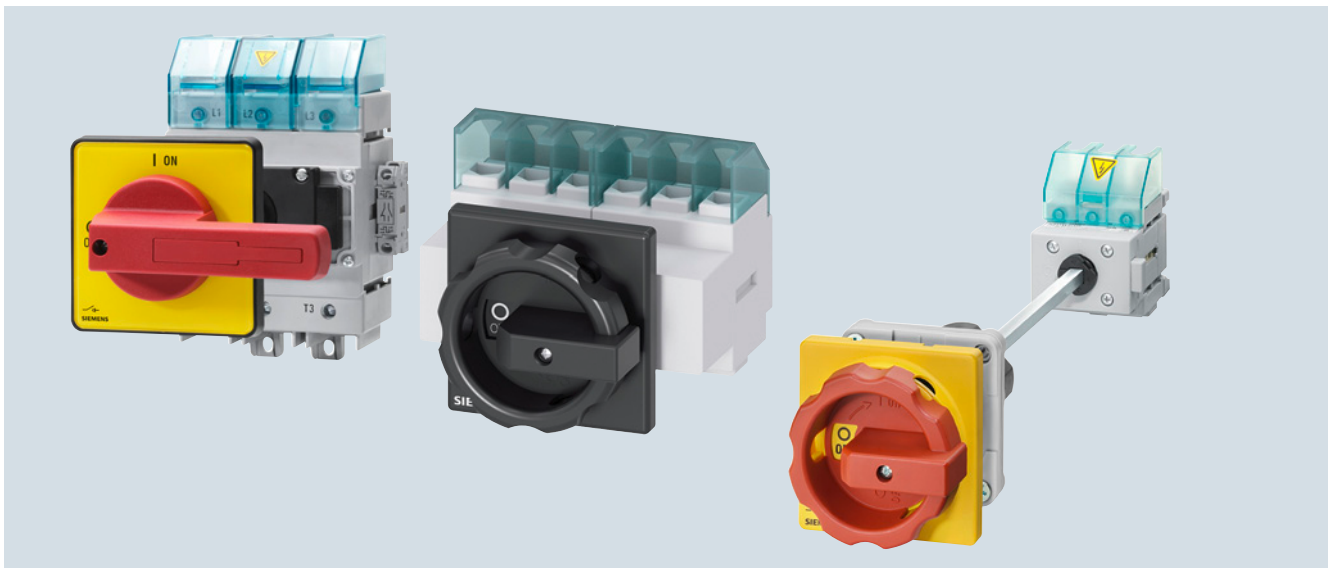
7/238 Accessories

Switch Disconnectors

Introduction

Overview

		Article No.	Page
Fuseless switch disconnectors			
	Main control and EMERGENCY-STOP switches from 16 A to 250 A	3LD	7/3
	• Main control and EMERGENCY-STOP switches from 16 A to 63 A NEW • Front/floor mounting, door-coupling rotary operating mechanism and mounting in distribution boards • Front mounting via center hole mounting • 3 and 4-pole versions	3LD3	
	• Main control and EMERGENCY-STOP switches from 16 A to 250 A • Front/floor mounting, door-coupling rotary operating mechanism, distribution board mounting and in molded-plastic enclosures • Front mounting with four-hole and center hole arrangement • 3, 4 and 6-pole versions • 3 and 4-pole load transfer switches • DC isolators 800 V DC	3LD2	
	Switch disconnectors from 100 A to 200 A	5TE1	7/82
	• For floor and distribution board mounting • 2, 3 and 4-pole versions		
	Switch disconnectors up to 1600 A	3KD	7/45
	• Compact design allowing it to be used where space is limited. • Complete assemblies: 3 and 4-pole switch disconnectors with front operating mechanisms, connections in form of box terminal or flat terminal including direct operating mechanism with gray handle • Basic units for individual configuration, with front operating mechanism without handle, 3 and 4-pole variants, connection by box terminal or flat terminal, operating mechanism module in center or on left-hand side of switch disconnector		
	Switch disconnectors from 63 A to 1000 A	3KA, 3KE	7/87
	• Devices for floor mounting with handle, with door-coupling rotary operating mechanism, in molded-plastic enclosures and for mounting in control cabinet side panels • 3 and 4-pole versions • Accessories for use as load transfer switches and parallel switches		
	Switch disconnectors from 160 A to 1600 A	3VT	7/98
	• Compact design allowing it to be used where space is limited. • 3 and 4-pole versions • Coordinated, comprehensive range of accessories for greater functionality, e.g. - Motorized operating mechanisms - Shunt and undervoltage releases for remote control - Switching state interrogation by means of auxiliary and alarm switches		
Switch disconnectors with fuses			
	Switch disconnectors with fuses up to 800 A NEW	3KF	7/122
	• Devices for floor mounting and for mounting in control cabinet side panels • 3 and 4-pole versions • Complete assemblies: Connections by box terminal or flat terminal including direct operating mechanism • Basic units for individual configuration, with front operating mechanism without handle, rotary operating mechanism, connection by box terminal or flat terminal, operating mechanism module in center or on left-hand side of switch disconnector • Suitable for LV HRC fuses		
	Switch disconnectors with fuses up to 800 A	3KL, 3KM	7/148
	• Devices for floor mounting with door-coupling rotary operating mechanism and for mounting in control cabinet side panels • 3KM versions with isolating plug connector for mounting on vertical busbars • 3 and 4-pole versions • Suitable for LV HRC and BS 88 fuses		
	In-line switch disconnectors with fuses, plug-in type, up to 630 A	3NJ62	7/165
	• 2, 3 and 4-pole versions • Suitable for LV HRC and BS 88 fuses • Manually operated or with motorized operating mechanism • Optionally with integrated current transformers, auxiliary switches, and electronic fuse monitoring		
Fuse switch disconnectors			
	3NP fuse switch disconnectors	3NP1, 3NP5	7/200
	• Rated current up to 630 A • Connection components are available for flat connection, saddle terminal connection, prism terminal connection and box terminal connection • Electromechanical and electronic fuse monitoring with/without network monitoring function • Mounting versions for floor mounting and 40/60 mm busbar system		
	In-line fuse switch disconnectors up to 2000 A	3NJ4, 3NJ5	7/233
	• 1 and 3-pole switchable versions • Versions for secondary-side protection of transformers • In-line infeed block versions up to 2000 A with isolating blades • Connection components are available for flat connection, stud bolt connection, saddle terminal connection, prism terminal connection and box terminal connection • Versions with/without integratable current transformer • Versions with/without electronic fuse monitoring		

Overview**3LD3 switch****3LD2 switch**

The 3LD main control and EMERGENCY-STOP switches are manually operated switch disconnectors according to IEC 60947-3/VDE 0660 Part 107 (EN 60947-3) and comply with the conditions for switch disconnectors.

In EN 60204-1 (VDE 0113 Part 1), these are called "disconnector units", while EMERGENCY-STOP switches are termed "devices for emergency shutdown".

The 3LD2 switches for 16 to 250 A are approved according to UL 508 and can be used as "manual motor controllers" and "motor disconnects". In addition, the 3LD switch disconnectors have CCC certification.

Maintenance personnel can protect themselves against unauthorized startup with padlocks (up to three can be fitted).

The 3LD switches can be used in any mounting position.

Application

The 3LD switches are used for switching main and auxiliary circuits, but also for switching three-phase motors and other devices during maintenance and repair work.

They can be used as:

- ON-OFF switches
- EMERGENCY-STOP switches
- Main control switches according to EN 60204-1 (3LD2 only)

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

General data

Overview

Type (rated current I_n)	3LD30 (16 A)	3LD20 (16 A)	3LD31 (25 A)	3LD21 (25 A)	3LD32 (32 A)	
Operating mechanism, red/yellow						
Operating mechanism, black						
Mounting type						
Front mounting						
• Center-hole mounting	✓	✓	✓	✓	✓	
• Four-hole mounting	--	✓	--	✓	--	
Floor mounting						
• Center-hole mounting	✓	✓	✓	✓	✓	
• Four-hole mounting	--	✓	--	✓	--	
Types of use						
Distribution board mounting	✓	✓	✓	✓	✓	
Molded-plastic enclosure	--	✓	--	✓	--	
DC isolator	--	--	--	--	--	
Transfer switch, see chapter "Transfer Switching Equipment and Load Transfer Switches"	--	--	--	✓	--	
Technical features						
Number of poles						
• 3-pole	✓	✓	✓	✓	✓	
• 4-pole	✓	✓	✓	✓	✓	
• 6-pole	--	--	--	✓	--	
Short-circuit behavior						
• Rated conditional short-circuit current with upstream fuses at AC 50/60 Hz, 690 V	kA	6	50	6	50	6
• Rated short-time withstand current (1 s current, rms value)	A	500	340	500	640	500
Endurance mechanical (operating cycles)		100000	100000	100000	100000	100000
Switching frequency	1/h	50	50	50	50	50
Conductor cross-sections for main conductors ¹⁾						
• Solid or stranded	mm ²	1x (2.5 ... 16 mm ²)	1 ... 6	1x (2.5 ... 16 mm ²)	1.5 ... 16	1x (2.5 ... 16 mm ²)
• Finely stranded with end sleeve (max.)	mm ²	1x (2.5 ... 16 mm ²)	4	1x (2.5 ... 16 mm ²)	10	1x (2.5 ... 16 mm ²)
• Conductor cross-sections	AWG	14 ... 6	18 ... 10	14 ... 6	14 ... 8	14 ... 6
• Torque for terminal	Nm	3	1.5 ... 2	3	2 ... 2.5	3
Accessories						
Auxiliary switches						
• 1 NO + 1 NC	✓	✓	✓	✓	✓	
• 2 NO	--	✓	--	✓	--	
Further accessories						
• 4 th pole	✓	--	✓	✓	✓	
• N or PE terminals	✓	✓	✓	✓	✓	

¹⁾ Depending on the cable infeed, only small cross-sections are possible with 3LD2 devices in molded-plastic enclosures.

✓ Available

-- Not available

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

General data

3LD22 (32 A)	3LD33 (40 A)	3LD34 (63 A)	3LD25 (63 A)	3LD27 (100 A)	3LD28 (125 A)	3LD23 (160 A)	3LD24 (250 A)
							
							
✓ ✓	✓ --	✓ --	✓ ✓	-- ✓	-- ✓	-- ✓	-- ✓
✓ ✓	-- --	✓ --	✓ ✓	-- ✓	-- ✓	-- ✓	-- ✓
✓	✓	✓	✓	✓	✓	✓	✓
✓	--	--	--	✓	✓	--	--
✓	--	--	--	--	--	--	--
✓	--	--	✓	✓	--	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	--	--	✓	✓
✓	--	--	✓	--	--	✓	✓
50	6	6	50	50	20	50	50
640	1000	1000	1260	2000	2000	4000	4000
100000	100000	100000	100000	100000	100000	100000	100000
50	50	50	50	50	50	50	50
1.5 ... 16	1x (2.5 ... 16 mm²)	1x (2.5 ... 16 mm²)	2.5 ... 35	4 ... 50	4 ... 50	16 ... 185	16 ... 185
10	1x (2.5 ... 16 mm²)	1x (2.5 ... 16 mm²)	16	35	35	150	150
14 ... 8	14 ... 6	14 ... 6	14 ... 6	12 ... 1	12 ... 1		
2 ... 2.5	3	3	2.5 ... 3	2.5 ... 3	2.5 ... 3	9.5 ... 60	9.5 ... 60
✓ ✓	✓ --	✓ --	✓ ✓	✓ ✓	✓ ✓	✓ ✓	✓ ✓
✓ ✓	✓ ✓	✓ ✓	✓ ✓	✓ ✓	✓ ✓	✓ ✓	✓ ✓

✓ Available
-- Not available

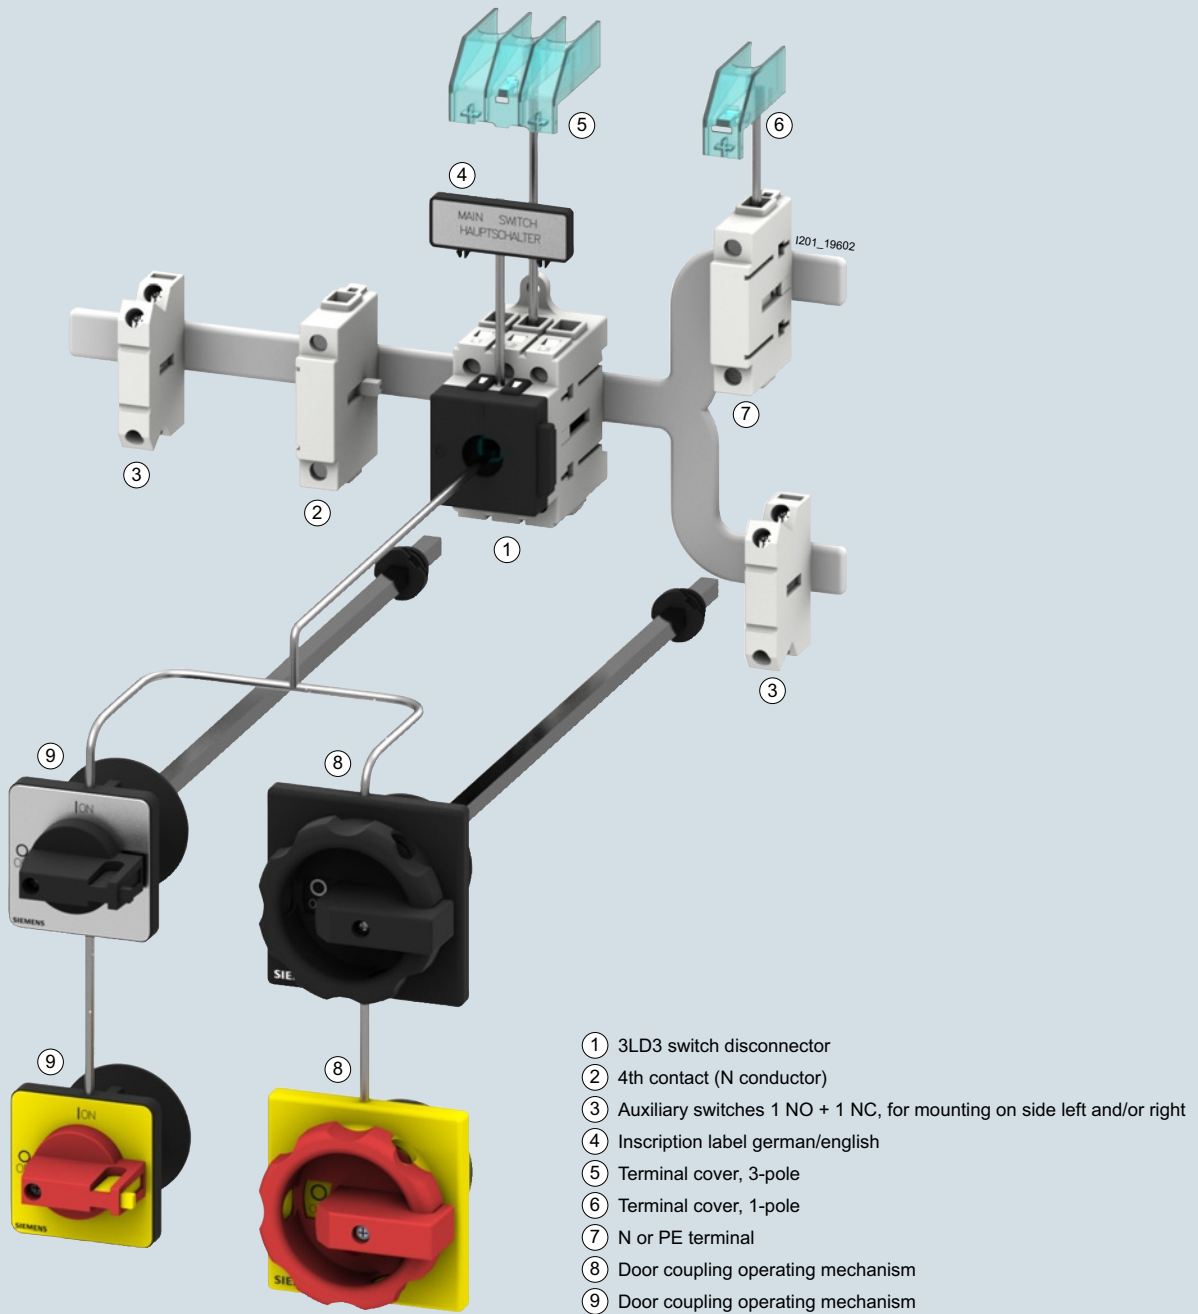
Switch Disconnectors

Fuseless Switch Disconnectors

3LD3 Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD3 main control and EMERGENCY-STOP switches from 16 to 63 A > Introduction **NEW**

Overview



The 3LD3 main control and EMERGENCY-STOP switches are suitable for a current range from 16 to 63 A. As main control switches for small tools, as load EMERGENCY-STOP switches and as load maintenance switches, they meet all the relevant IEC requirements.

Versions and accessories

- One size with box terminal in 3 and 4-pole version
- Installation via front and floor mounting or distribution board mounting
- Auxiliary switches for querying the switch positions
- Door-coupling rotary operating mechanism for operation of switch disconnector outside the control cabinet door

Benefits

- Compact, narrow design saves space
- Flexibility thanks to numerous application options
- Locking capability during maintenance work
- A wide range of accessories available
- Comprehensive support through provision of CAx data

Application

The 3LD3 switches are used for switching machines as well as three-phase motors and other loads in cases of maintenance and repair.

The 3LD3 switches can be used as follows:

- ON-OFF switches
- EMERGENCY-STOP switches


Design**Design of the contacts**

Each switch has three adjacent contact elements. A 4th leading contact for switching the N conductor, a continuous PE terminal, an auxiliary switch (1 NO + 1 NC) can be fitted to each side of the switch. The auxiliary switches operate as leading contacts on opening. On opening, the NO contact opens before the main contacts, so that a contactor carries the switching capacity in the circuit and the maintenance or safety switch switches at zero current. On closing, the auxiliary switch switches later than or at the same time as the main contacts.

Design of rotary operating mechanisms

The rotary operating mechanisms of the switches for front or floor mounting are mounted on control cabinet doors, or on front or side panels via center-hole mounting with a standard diameter of 22.5 mm and are operated from the outside. In their OFF position, they can be locked with 1 to 3 padlocks with a hasp thickness of 4 to 8 mm.


- Switch position indicator:
The switch position is clearly marked with direction arrows and an "O" for OFF and an "I" for ON at the front.
- Switches for front mounting:
The switches for front mounting are connected directly to the rotary operating mechanism through the fixing screws or – in the case of center-hole mounting – a special-purpose coupling.
- Switches for floor mounting:
The switches for floor mounting are snapped onto 35 mm standard mounting rails according to EN 60715 or screw-mounted on mounting plates. The actuators are connected to the lower section of the switch through a door coupling, which can be released in its zero position, and a 300 mm long switch shaft. When the control cabinet door is open, the switch can be protected against inadvertent operation by removing the switch shaft from the lower section of the switch. The overall depth can be adapted to individual requirements by adjusting the switch shaft length.
- Switches for distribution board mounting:
The switches for distribution board mounting are suited for operation in distribution boards and for switching inside control cabinets or distribution boards. They have cap and mounting dimensions to DIN 43880 and can be fitted under the same cover together with miniature circuit breakers. The selector switches can be locked in their OFF position with no more than one padlock with a hasp thickness of 4 to 6 mm.



3LD3050-0TK13 switch for front mounting with rotary operating mechanism



3LD3050-0TK11 switch for front mounting with knob



3LD3040-0TK13 switch for floor mounting with knob and door coupling



3LD3030-0TK11 switch for distribution board mounting with knob



3LD3048-0TK51 switch for floor mounting with rotary operating mechanism and door coupling

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD3 main control and EMERGENCY-STOP switches from 16 to 63 A > Introduction NEW

Technical specifications

Article number		3LD30...	3LD31...	3LD32...	3LD33...	3LD34...
Continuous current rated value	A	16	25	32	40	63
Insulation voltage rated value	V	690	690	690	690	690
Operational voltage for AC at 50/60 Hz, rated value	V	690	690	690	690	690
Operating frequency	Hz	50 ... 60	50 ... 60	50 ... 60	50 ... 60	50 ... 60
Impulse withstand voltage rated value	kV	6	6	6	6	6
Short-time withstand current (I_{cw}) / limited to 1 s, rated value	kA	500	500	500	1 000	1 000
Design of fuse link required for short-circuit protection of the main circuit		Fuse gL/gG: 16 A	Fuse gL/gG: 25 A	Fuse gL/gG: 32 A	Fuse gL/gG: 40 A	Fuse gL/gG: 63 A
Conditional short-circuit current with line-side fuse at 690 V via gG fuse, rated value	kA	6	6	6	6	6
Let-through current with closed switch at 690 V for combination switch + gG fuse, maximum permissible	kA	3	3.5	4.5	5	6
Operational power						
• At AC-3 at 240 V, rated value	kW	3	4	5.5	7.5	11
• At AC-3 at 440 V, rated value	kW	5.5	7.5	9.5	11.5	18.5
• At AC-3 at 400 V, rated value	kW	5.5	7.5	9.5	11.5	18.5
• At AC-3 at 690 V, rated value	kW	5.5	7.5	9.5	11.5	15
• At AC-23 A at 400 V, rated value	kW	7.5	9.5	11.5	18.5	22
• At AC-23 A at 690 V, rated value	kW	7.5	9	11.5	15	18.5
• At AC-23 A at 240 V, rated value	kW	3	4	6	7.5	11
• At AC-23 A at 440 V, rated value	kW	7.5	9	11.5	15	22
Typical power loss for each conductor	W	0.5	1.1	1.1	1.8	4.5
Typical mechanical endurance (operating cycles)		100 000				
Electrical endurance (operating cycles) at AC-23 A at 690 V at 50/60 Hz		6 000				
Ambient temperature						
• During operation		-25 ... +55				
• During storage		-25 ... +55				
Type of connectable conductor cross-sections						
• Solid for auxiliary contacts		2x (0.75 ... 2.5 mm ²), 1x 4 mm ²				
• Finely stranded with end sleeve for auxiliary contacts		2x (0.75 ... 1.5 mm ²), 1x 2.5 mm ²				
• Stranded for auxiliary contacts		2x (0.75 ... 2.5 mm ²), 1x 4 mm ²				
• Solid for copper conductors		1x (2.5 ... 16 mm ²)				
• Stranded for copper conductors		1x (2.5 ... 16 mm ²)				
• Finely stranded with end sleeve for copper conductors		1x (2.5 ... 16 mm ²)				
Design of electrical connection						
• For main circuit		Box terminal				
• For auxiliary contacts		Terminals				
Auxiliary switches						
Design of fuse link required for short-circuit protection of the auxiliary switch		Fuse gL/gG: 10 A				
Insulation voltage for the auxiliary switch, rated value	V	500				

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

NEW 3LD3 main control and EMERGENCY-STOP switches from 16 to 63 A > Front mounting**Selection and ordering data**

Number and version of the contacts		Rated data at 50 ... 60 Hz, 380 ... 400 V		Color of the operating mechanism	SD	Article No. www.siemens.com/ product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
Main contact elements	Auxiliary contact elements	P/AC-23A	I _U /AC-21A							
		kW	A	d						
Main control and EMERGENCY-STOP switches with direct operating mechanism (rotary operating mechanism)										
- Lockable in 0 position with up to 3 padlocks with a hasp thickness of 4 to 8 mm - Degree of protection at front side IP65 - All versions with rotary operating mechanism - Including terminal cover for the infeed side - Front plate 66 x 66 mm										
 3LD3054-1TK51	3	--	7.5	16	Black	3LD3054-0TK51		1	1 unit	1CL
		--	7.5	16	Red/yellow	3LD3054-0TK53		1	1 unit	1CL
		--	9.0	25	Black	3LD3154-0TK51		1	1 unit	1CL
		--	9.0	25	Red/yellow	3LD3154-0TK53		1	1 unit	1CL
		--	11.5	32	Black	3LD3254-0TK51		1	1 unit	1CL
		--	11.5	32	Red/yellow	3LD3254-0TK53		1	1 unit	1CL
		--	15.0	40	Black	3LD3354-0TK51		1	1 unit	1CL
		--	15.0	40	Red/yellow	3LD3354-0TK53		1	1 unit	1CL
		--	22.0	63	Black	3LD3454-0TK51		1	1 unit	1CL
		--	22.0	63	Red/yellow	3LD3454-0TK53		1	1 unit	1CL
 3LD3054-0TK53	1 NC + 1 NO	7.5	16	Black	3LD3054-1TK51		1	1 unit	1CL	
		7.5	16	Red/yellow	3LD3054-1TK53		1	1 unit	1CL	
		9.0	25	Black	3LD3154-1TK51		1	1 unit	1CL	
		9.0	25	Red/yellow	3LD3154-1TK53		1	1 unit	1CL	
		11.5	32	Black	3LD3254-1TK51		1	1 unit	1CL	
		11.5	32	Red/yellow	3LD3254-1TK53		1	1 unit	1CL	
		15.0	40	Black	3LD3354-1TK51		1	1 unit	1CL	
		15.0	40	Red/yellow	3LD3354-1TK53		1	1 unit	1CL	
		22.0	63	Black	3LD3454-1TK51		1	1 unit	1CL	
		22.0	63	Red/yellow	3LD3454-1TK53		1	1 unit	1CL	
 3LD3054-1TL51	3 + N	--	7.5	16	Black	3LD3054-0TL51		1	1 unit	1CL
		--	7.5	16	Red/yellow	3LD3054-0TL53		1	1 unit	1CL
		--	9.0	25	Black	3LD3154-0TL51		1	1 unit	1CL
		--	9.0	25	Red/yellow	3LD3154-0TL53		1	1 unit	1CL
		--	11.5	32	Black	3LD3254-0TL51		1	1 unit	1CL
		--	11.5	32	Red/yellow	3LD3254-0TL53		1	1 unit	1CL
		--	15.0	40	Black	3LD3354-0TL51		1	1 unit	1CL
		--	15.0	40	Red/yellow	3LD3354-0TL53		1	1 unit	1CL
		--	22.0	63	Black	3LD3454-0TL51		1	1 unit	1CL
		--	22.0	63	Red/yellow	3LD3454-0TL53		1	1 unit	1CL
 3LD3054-0TL53	1 NO + 1 NC	7.5	16	Black	3LD3054-1TL51		1	1 unit	1CL	
		7.5	16	Red/yellow	3LD3054-1TL53		1	1 unit	1CL	
		9.0	25	Black	3LD3154-1TL51		1	1 unit	1CL	
		9.0	25	Red/yellow	3LD3154-1TL53		1	1 unit	1CL	
		11.5	32	Black	3LD3254-1TL51		1	1 unit	1CL	
		11.5	32	Red/yellow	3LD3254-1TL53		1	1 unit	1CL	
		15.0	40	Black	3LD3354-1TL51		1	1 unit	1CL	
		15.0	40	Red/yellow	3LD3354-1TL53		1	1 unit	1CL	
		22.0	63	Black	3LD3454-1TL51		1	1 unit	1CL	
		22.0	63	Red/yellow	3LD3454-1TL53		1	1 unit	1CL	

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD3 main control and EMERGENCY-STOP switches from 16 to 63 A > Front mounting NEW

Number and version of the contacts		Rated data at 50 ... 60 Hz, 400 V		Size of front plate	Color of the operating mechanism	SD	Article No. www.siemens.com/product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
Main contact elements	Auxiliary contact elements	P/AC-23A	I_u	mm		d					
		kW	A								
Main control and EMERGENCY-STOP switches with direct operating mechanism (knob-operated mechanism) • Lockable in 0 position (can be modified to I position) with max. 2 padlocks with a hasp thickness of 4 to 6 mm • Degree of protection at front side IP65 • Including terminal cover for the infeed side • Front plate: 48 x 48 mm or 66 x 66 mm											
Center-hole mounting Ø 22.5 mm											
 3LD3050-0TK11	3	--	7.5	16	48x48	Black	3LD3050-0TK11		1	1 unit	1CL
	--	--	7.5	16	48x48	Red/yellow	3LD3050-0TK13		1	1 unit	1CL
	--	--	9.0	25	48x48	Black	3LD3150-0TK11		1	1 unit	1CL
	--	--	9.0	25	48x48	Red/yellow	3LD3150-0TK13		1	1 unit	1CL
	--	--	9.0	25	66x66	Black	3LD3154-0TK51		1	1 unit	1CL
	--	--	9.0	25	66x66	Red/yellow	3LD3154-0TK53		1	1 unit	1CL
	--	--	11.5	32	48x48	Black	3LD3250-0TK11		1	1 unit	1CL
	--	--	11.5	32	48x48	Red/yellow	3LD3250-0TK13		1	1 unit	1CL
	--	--	15.0	40	48x48	Black	3LD3350-0TK11		1	1 unit	1CL
	--	--	15.0	40	48x48	Red/yellow	3LD3350-0TK13		1	1 unit	1CL
	--	--	15.0	40	66x66	Black	3LD3354-0TK51		1	1 unit	1CL
	--	--	15.0	40	66x66	Red/yellow	3LD3354-0TK53		1	1 unit	1CL
	--	--	22.0	63	48x48	Black	3LD3450-0TK11		1	1 unit	1CL
	--	--	22.0	63	48x48	Red/yellow	3LD3450-0TK13		1	1 unit	1CL
	--	--	22.0	63	66x66	Black	3LD3454-0TK51		1	1 unit	1CL
	--	--	22.0	63	66x66	Red/yellow	3LD3454-0TK53		1	1 unit	1CL
 3LD3050-0TK13	1 NO + 1 NC	7.5	16	48x48	Black	3LD3050-1TK11			1	1 unit	1CL
		7.5	16	48x48	Red/yellow	3LD3050-1TK13			1	1 unit	1CL
		9.0	25	48x48	Black	3LD3150-1TK11			1	1 unit	1CL
		9.0	25	48x48	Red/yellow	3LD3150-1TK13			1	1 unit	1CL
		9.0	25	66x66	Black	3LD3154-1TK51			1	1 unit	1CL
		9.0	25	66x66	Red/yellow	3LD3154-1TK53			1	1 unit	1CL
		11.5	32	48x48	Black	3LD3250-1TK11			1	1 unit	1CL
		11.5	32	48x48	Red/yellow	3LD3250-1TK13			1	1 unit	1CL
		15.0	40	48x48	Black	3LD3350-1TK11			1	1 unit	1CL
		15.0	40	48x48	Red/yellow	3LD3350-1TK13			1	1 unit	1CL
		15.0	40	66x66	Black	3LD3354-1TK51			1	1 unit	1CL
		15.0	40	66x66	Red/yellow	3LD3354-1TK53			1	1 unit	1CL
		22.0	63	48x48	Black	3LD3450-1TK11			1	1 unit	1CL
		22.0	63	48x48	Red/yellow	3LD3450-1TK13			1	1 unit	1CL
		22.0	63	66x66	Black	3LD3454-1TK51			1	1 unit	1CL
		22.0	63	66x66	Red/yellow	3LD3454-1TK53			1	1 unit	1CL

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

NEW 3LD3 main control and EMERGENCY-STOP switches from 16 to 63 A > Front mounting

	Number and version of the contacts		Rated data at 50 ... 60 Hz, 400 V		Size of front plate	Color of the operating mechanism	SD	Article No. www.siemens.com/product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
	Main contact elements	Auxiliary contact elements	P/AC-23A	I _u								
			kW	A								
 3LD3050-0TL11	3+N	--	7.5	16	48x48	Black		3LD3050-0TL11		1	1 unit	1CL
		--	7.5	16	48x48	Red/yellow		3LD3050-0TL13		1	1 unit	1CL
		--	9.0	25	48x48	Black		3LD3150-0TL11		1	1 unit	1CL
		--	9.0	25	48x48	Red/yellow		3LD3150-0TL13		1	1 unit	1CL
		--	9.0	25	66x66	Black		3LD3154-0TL51		1	1 unit	1CL
		--	9.0	25	66x66	Red/yellow		3LD3154-0TL53		1	1 unit	1CL
		--	11.5	32	48x48	Black		3LD3250-0TL11		1	1 unit	1CL
		--	11.5	32	48x48	Red/yellow		3LD3250-0TL13		1	1 unit	1CL
		--	15.0	40	48x48	Black		3LD3350-0TL11		1	1 unit	1CL
		--	15.0	40	48x48	Red/yellow		3LD3350-0TL13		1	1 unit	1CL
		--	15.0	40	66x66	Black		3LD3354-0TL51		1	1 unit	1CL
		--	15.0	40	66x66	Red/yellow		3LD3354-0TL53		1	1 unit	1CL
		--	22.0	63	48x48	Black		3LD3450-0TL11		1	1 unit	1CL
		--	22.0	63	48x48	Red/yellow		3LD3450-0TL13		1	1 unit	1CL
		--	22.0	63	66x66	Black		3LD3454-0TL51		1	1 unit	1CL
		--	22.0	63	66x66	Red/yellow		3LD3454-0TL53		1	1 unit	1CL
 3LD3050-0TL13	1 NO + 1 NC		7.5	16	48x48	Black		3LD3050-1TL11		1	1 unit	1CL
			7.5	16	48x48	Red/yellow		3LD3050-1TL13		1	1 unit	1CL
			9.0	25	48x48	Black		3LD3150-1TL11		1	1 unit	1CL
			9.0	25	48x48	Red/yellow		3LD3150-1TL13		1	1 unit	1CL
			9.0	25	66x66	Black		3LD3154-1TL51		1	1 unit	1CL
			9.0	25	66x66	Red/yellow		3LD3154-1TL53		1	1 unit	1CL
			11.5	32	48x48	Black		3LD3250-1TL11		1	1 unit	1CL
			11.5	32	48x48	Red/yellow		3LD3250-1TL13		1	1 unit	1CL
			15.0	40	48x48	Black		3LD3350-1TL11		1	1 unit	1CL
			15.0	40	48x48	Red/yellow		3LD3350-1TL13		1	1 unit	1CL
			15.0	40	66x66	Black		3LD3354-1TL51		1	1 unit	1CL
			15.0	40	66x66	Red/yellow		3LD3354-1TL53		1	1 unit	1CL
			22.0	63	48x48	Black		3LD3450-1TL11		1	1 unit	1CL
			22.0	63	48x48	Red/yellow		3LD3450-1TL13		1	1 unit	1CL
			22.0	63	66x66	Black		3LD3454-1TL51		1	1 unit	1CL
			22.0	63	66x66	Red/yellow		3LD3454-1TL53		1	1 unit	1CL

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD3 main control and EMERGENCY-STOP switches from 16 to 63 A > Floor mounting NEW

Selection and ordering data

Number and version of the contacts		Rated data at 50 ... 60 Hz, 380 ... 440 V		Color of the operating mechanism	SD	Article No. www.siemens.com/product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
Main contact elements	Auxiliary contact elements	P/AC-23A	I _N /AC-21A							
		kW	A	d						
Main control and EMERGENCY-STOP switches with door-coupling (rotary operating mechanism)										
• Lockable in 0 position with up to 3 padlocks with a hasp thickness of 4 to 8 mm • Degree of protection at front side IP65 • All versions with rotary operating mechanism • Including terminal cover for the infeed side • Front plate 66 x 66 mm										
Center-hole mounting Ø 22.5 mm										
 3LD3048-0TK51	3	--	7.5	16	Black	3LD3048-0TK51		1	1 unit	1CL
		--	7.5	16	Red/yellow	3LD3048-0TK53		1	1 unit	1CL
		--	9.0	25	Black	3LD3148-0TK51		1	1 unit	1CL
		--	9.0	25	Red/yellow	3LD3148-0TK53		1	1 unit	1CL
		--	11.5	32	Black	3LD3248-0TK51		1	1 unit	1CL
		--	11.5	32	Red/yellow	3LD3248-0TK53		1	1 unit	1CL
		--	15.0	40	Black	3LD3348-0TK51		1	1 unit	1CL
		--	15.0	40	Red/yellow	3LD3348-0TK53		1	1 unit	1CL
		--	22.0	63	Black	3LD3448-0TK51		1	1 unit	1CL
		--	22.0	63	Red/yellow	3LD3448-0TK53		1	1 unit	1CL
 3LD3048-0TK53	1 NO + 1 NC	7.5	16	Black	3LD3048-1TK51		1	1 unit	1CL	
		7.5	16	Red/yellow	3LD3048-1TK53		1	1 unit	1CL	
		9.0	25	Black	3LD3148-1TK51		1	1 unit	1CL	
		9.0	25	Red/yellow	3LD3148-1TK53		1	1 unit	1CL	
		11.5	32	Black	3LD3248-1TK51		1	1 unit	1CL	
		11.5	32	Red/yellow	3LD3248-1TK53		1	1 unit	1CL	
		15.0	40	Black	3LD3348-1TK51		1	1 unit	1CL	
		15.0	40	Red/yellow	3LD3348-1TK53		1	1 unit	1CL	
		22.0	63	Black	3LD3448-1TK51		1	1 unit	1CL	
		22.0	63	Red/yellow	3LD3448-1TK53		1	1 unit	1CL	
 3LD3050-0TL11	3 + N	--	7.5	16	Black	3LD3048-0TL51		1	1 unit	1CL
		--	7.5	16	Red/yellow	3LD3048-0TL53		1	1 unit	1CL
		--	9.0	25	Black	3LD3148-0TL51		1	1 unit	1CL
		--	9.0	25	Red/yellow	3LD3148-0TL53		1	1 unit	1CL
		--	11.5	32	Black	3LD3248-0TL51		1	1 unit	1CL
		--	11.5	32	Red/yellow	3LD3248-0TL53		1	1 unit	1CL
		--	15.0	40	Black	3LD3348-0TL51		1	1 unit	1CL
		--	15.0	40	Red/yellow	3LD3348-0TL53		1	1 unit	1CL
		--	22.0	63	Black	3LD3448-0TL51		1	1 unit	1CL
		--	22.0	63	Red/yellow	3LD3448-0TL53		1	1 unit	1CL
 3LD3048-0TL53	1 NO + 1 NC	7.5	16	Black	3LD3048-1TL51		1	1 unit	1CL	
		7.5	16	Red/yellow	3LD3048-1TL53		1	1 unit	1CL	
		9.0	25	Black	3LD3148-1TL51		1	1 unit	1CL	
		9.0	25	Red/yellow	3LD3148-1TL53		1	1 unit	1CL	
		11.5	32	Black	3LD3248-1TL51		1	1 unit	1CL	
		11.5	32	Red/yellow	3LD3248-1TL53		1	1 unit	1CL	
		15.0	40	Black	3LD3348-1TL51		1	1 unit	1CL	
		15.0	40	Red/yellow	3LD3348-1TL53		1	1 unit	1CL	
		22.0	63	Black	3LD3448-1TL51		1	1 unit	1CL	
		22.0	63	Red/yellow	3LD3448-1TL53		1	1 unit	1CL	

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

NEW 3LD3 main control and EMERGENCY-STOP switches from 16 to 63 A > Floor mounting

Number and version of the contacts		Rated data at 50 ... 60 Hz, 400 V		Color of the operating mechanism	SD	Article No. www.siemens.com/product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
Main contact elements	Auxiliary contact elements	P/AC-23A	I _N /AC-21A							
		kW	A		d					
Main control and EMERGENCY-STOP switches with door-coupling (knob-operated mechanism) • Lockable in 0 position with up to 2 padlocks with a hasp thickness of 4 to 6 mm • Degree of protection at front side IP65 • All versions with rotary operating mechanism • Including terminal cover for the infeed side • Front plate 48 x 48 mm										
Center-hole mounting Ø 22.5 mm										
 3LD3048-0TK51	3	--	7.5	16	Black	3LD3040-0TK11		1	1 unit	1CL
		--	7.5	16	Red/yellow	3LD3040-0TK13		1	1 unit	1CL
		--	9.0	25	Black	3LD3140-0TK11		1	1 unit	1CL
		--	9.0	25	Red/yellow	3LD3140-0TK13		1	1 unit	1CL
		--	11.5	32	Black	3LD3240-0TK11		1	1 unit	1CL
		--	11.5	32	Red/yellow	3LD3240-0TK13		1	1 unit	1CL
		--	15.0	40	Black	3LD3340-0TK11		1	1 unit	1CL
		--	15.0	40	Red/yellow	3LD3340-0TK13		1	1 unit	1CL
		--	22.0	63	Black	3LD3440-0TK11		1	1 unit	1CL
		--	22.0	63	Red/yellow	3LD3440-0TK13		1	1 unit	1CL
		1 NO + 1 NC	7.5	16	Black	3LD3040-1TK11		1	1 unit	1CL
			7.5	16	Red/yellow	3LD3040-1TK13		1	1 unit	1CL
			9.0	25	Black	3LD3140-1TK11		1	1 unit	1CL
			9.0	25	Red/yellow	3LD3140-1TK13		1	1 unit	1CL
 3LD3048-0TK53	3	--	7.5	16	Black	3LD3040-1TK11		1	1 unit	1CL
		--	7.5	16	Red/yellow	3LD3040-1TK13		1	1 unit	1CL
		--	9.0	25	Black	3LD3140-1TK11		1	1 unit	1CL
		--	9.0	25	Red/yellow	3LD3140-1TK13		1	1 unit	1CL
		--	11.5	32	Black	3LD3240-1TK11		1	1 unit	1CL
		--	11.5	32	Red/yellow	3LD3240-1TK13		1	1 unit	1CL
		--	15.0	40	Black	3LD3340-1TK11		1	1 unit	1CL
		--	15.0	40	Red/yellow	3LD3340-1TK13		1	1 unit	1CL
		--	22.0	63	Black	3LD3440-1TK11		1	1 unit	1CL
		--	22.0	63	Red/yellow	3LD3440-1TK13		1	1 unit	1CL
		1 NO + 1 NC	7.5	16	Black	3LD3040-1TL11		1	1 unit	1CL
			7.5	16	Red/yellow	3LD3040-1TL13		1	1 unit	1CL
			9.0	25	Black	3LD3140-1TL11		1	1 unit	1CL
			9.0	25	Red/yellow	3LD3140-1TL13		1	1 unit	1CL
 3LD3040-0TL11	3 + N	--	7.5	16	Black	3LD3040-0TL11		1	1 unit	1CL
		--	7.5	16	Red/yellow	3LD3040-0TL13		1	1 unit	1CL
		--	9.0	25	Black	3LD3140-0TL11		1	1 unit	1CL
		--	9.0	25	Red/yellow	3LD3140-0TL13		1	1 unit	1CL
		--	11.5	32	Black	3LD3240-0TL11		1	1 unit	1CL
		--	11.5	32	Red/yellow	3LD3240-0TL13		1	1 unit	1CL
		--	15.0	40	Black	3LD3340-0TL11		1	1 unit	1CL
		--	15.0	40	Red/yellow	3LD3340-0TL13		1	1 unit	1CL
		--	22.0	63	Black	3LD3440-0TL11		1	1 unit	1CL
		--	22.0	63	Red/yellow	3LD3440-0TL13		1	1 unit	1CL
		1 NO + 1 NC	7.5	16	Black	3LD3040-1TL11		1	1 unit	1CL
			7.5	16	Red/yellow	3LD3040-1TL13		1	1 unit	1CL
			9.0	25	Black	3LD3140-1TL11		1	1 unit	1CL
			9.0	25	Red/yellow	3LD3140-1TL13		1	1 unit	1CL
 3LD3040-0TL13	3 + N	--	11.5	32	Black	3LD3240-1TL11		1	1 unit	1CL
		--	11.5	32	Red/yellow	3LD3240-1TL13		1	1 unit	1CL
		--	15.0	40	Black	3LD3340-1TL11		1	1 unit	1CL
		--	15.0	40	Red/yellow	3LD3340-1TL13		1	1 unit	1CL
		--	22.0	63	Black	3LD3440-1TL11		1	1 unit	1CL
		--	22.0	63	Red/yellow	3LD3440-1TL13		1	1 unit	1CL
		1 NO + 1 NC	7.5	16	Black	3LD3040-1TL11		1	1 unit	1CL
			7.5	16	Red/yellow	3LD3040-1TL13		1	1 unit	1CL

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD3 main control and EMERGENCY-STOP switches from 16 to 63 A > Distribution board mounting NEW

Selection and ordering data

Number and version of the contacts		Rated data at 50 ... 60 Hz, 400 V		Color of the operating mechanism	SD	Article No. www.siemens.com/product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
Main contact elements	Auxiliary contact elements	P/AC-23A	I_u		d					
		kW	A							
ON/OFF and EMERGENCY-STOP switches, basic switch, with masking plate and selector knob • With screw fixing • With snap-on mounting on 35 mm standard mounting rail • Lockable in 0 position with up to 2 padlocks with a hasp thickness of 4 to 6 mm • Degree of protection at front side IP40 • Including terminal cover for the infeed side										
Distribution board mounting, standard rail mounting										
 3LD3030-0TK11	3	--	7.5	16	Black	3LD3030-0TK11		1	1 unit	1CL
		--	7.5	16	Red/yellow	3LD3030-0TK13		1	1 unit	1CL
		--	9.0	25	Black	3LD3130-0TK11		1	1 unit	1CL
		--	9.0	25	Red/yellow	3LD3130-0TK13		1	1 unit	1CL
		--	11.5	32	Black	3LD3230-0TK11		1	1 unit	1CL
		--	11.5	32	Red/yellow	3LD3230-0TK13		1	1 unit	1CL
		--	15.0	40	Black	3LD3330-0TK11		1	1 unit	1CL
		--	15.0	40	Red/yellow	3LD3330-0TK13		1	1 unit	1CL
		--	22.0	63	Black	3LD3430-0TK11		1	1 unit	1CL
		--	22.0	63	Red/yellow	3LD3430-0TK13		1	1 unit	1CL
		1 NO + 1 NC	7.5	16	Black	3LD3030-1TK11		1	1 unit	1CL
			7.5	16	Red/yellow	3LD3030-1TK13		1	1 unit	1CL
			9.0	25	Black	3LD3130-1TK11		1	1 unit	1CL
			9.0	25	Red/yellow	3LD3130-1TK13		1	1 unit	1CL
			11.5	32	Black	3LD3230-1TK11		1	1 unit	1CL
			11.5	32	Red/yellow	3LD3230-1TK13		1	1 unit	1CL
 3LD3030-0TK13	3	--	7.5	16	Black	3LD3030-0TK11		1	1 unit	1CL
		--	7.5	16	Red/yellow	3LD3030-0TK13		1	1 unit	1CL
		--	9.0	25	Black	3LD3130-0TK11		1	1 unit	1CL
		--	9.0	25	Red/yellow	3LD3130-0TK13		1	1 unit	1CL
		--	11.5	32	Black	3LD3230-0TK11		1	1 unit	1CL
		--	11.5	32	Red/yellow	3LD3230-0TK13		1	1 unit	1CL
		--	15.0	40	Black	3LD3330-0TK11		1	1 unit	1CL
		--	15.0	40	Red/yellow	3LD3330-0TK13		1	1 unit	1CL
		--	22.0	63	Black	3LD3430-0TK11		1	1 unit	1CL
		--	22.0	63	Red/yellow	3LD3430-0TK13		1	1 unit	1CL
		1 NO + 1 NC	7.5	16	Black	3LD3030-1TK11		1	1 unit	1CL
			7.5	16	Red/yellow	3LD3030-1TK13		1	1 unit	1CL
			9.0	25	Black	3LD3130-1TK11		1	1 unit	1CL
			9.0	25	Red/yellow	3LD3130-1TK13		1	1 unit	1CL
			11.5	32	Black	3LD3230-1TK11		1	1 unit	1CL
			11.5	32	Red/yellow	3LD3230-1TK13		1	1 unit	1CL
 3LD3040-0TL11	3 + N	--	7.5	16	Black	3LD3030-0TL11		1	1 unit	1CL
		--	7.5	16	Red/yellow	3LD3030-0TL13		1	1 unit	1CL
		--	9.0	25	Black	3LD3130-0TL11		1	1 unit	1CL
		--	9.0	25	Red/yellow	3LD3130-0TL13		1	1 unit	1CL
		--	11.5	32	Black	3LD3230-0TL11		1	1 unit	1CL
		--	11.5	32	Red/yellow	3LD3230-0TL13		1	1 unit	1CL
		--	15.0	40	Black	3LD3330-0TL11		1	1 unit	1CL
		--	15.0	40	Red/yellow	3LD3330-0TL13		1	1 unit	1CL
		--	22.0	63	Black	3LD3430-0TL11		1	1 unit	1CL
		--	22.0	63	Red/yellow	3LD3430-0TL13		1	1 unit	1CL
		1 NO + 1 NC	7.5	16	Black	3LD3030-1TL11		1	1 unit	1CL
			7.5	16	Red/yellow	3LD3030-1TL13		1	1 unit	1CL
			9.0	25	Black	3LD3130-1TL11		1	1 unit	1CL
			9.0	25	Red/yellow	3LD3130-1TL13		1	1 unit	1CL
			11.5	32	Black	3LD3230-1TL11		1	1 unit	1CL
			11.5	32	Red/yellow	3LD3230-1TL13		1	1 unit	1CL
 3LD3040-0TL13	3 + N	--	15.0	40	Black	3LD3330-1TL11		1	1 unit	1CL
		--	15.0	40	Red/yellow	3LD3330-1TL13		1	1 unit	1CL
		--	22.0	63	Black	3LD3430-1TL11		1	1 unit	1CL
		--	22.0	63	Red/yellow	3LD3430-1TL13		1	1 unit	1CL

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

NEW 3LD3 main control and EMERGENCY-STOP switches from 16 to 63 A > Distribution board mounting

Number and version of the contacts		Rated data at 50 ... 60 Hz, 380 ... 440 V		SD	Article No. www.siemens.com/ product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
Main contact elements	Auxiliary contact elements	P/ AC-23A kW	I _u / AC-21A A	d					
Main control and EMERGENCY-STOP switches, basic switch without knob-operated mechanism - Degree of protection at front side IP20 - Including terminal cover for the infeed side - Front plate									
Center-hole mounting Ø 22.5 mm									
 3LD3010-0TK05	3	--	7.5	16	3LD3010-0TK05		1	1 unit	1CL
		--	9.0	25	3LD3110-0TK05		1	1 unit	1CL
		--	11.5	32	3LD3210-0TK05		1	1 unit	1CL
		--	15.0	40	3LD3310-0TK05		1	1 unit	1CL
		--	22.0	63	3LD3410-0TK05		1	1 unit	1CL
	1 NO + 1 NC	7.5	16		3LD3010-1TK05		1	1 unit	1CL
		9.0	25		3LD3110-1TK05		1	1 unit	1CL
		11.5	32		3LD3210-1TK05		1	1 unit	1CL
		15.0	40		3LD3310-1TK05		1	1 unit	1CL
		22.0	63		3LD3410-1TK05		1	1 unit	1CL
 3LD3010-0TL05	3 + N	--	7.5	16	3LD3010-0TL05		1	1 unit	1CL
		--	9.0	25	3LD3110-0TL05		1	1 unit	1CL
		--	11.5	32	3LD3210-0TL05		1	1 unit	1CL
		--	15.0	40	3LD3310-0TL05		1	1 unit	1CL
		--	22.0	63	3LD3410-0TL05		1	1 unit	1CL
	1 NO + 1 NC	7.5	16		3LD3010-1TL05		1	1 unit	1CL
		9.0	25		3LD3110-1TL05		1	1 unit	1CL
		11.5	32		3LD3210-1TL05		1	1 unit	1CL
		15.0	40		3LD3310-1TL05		1	1 unit	1CL
		22.0	63		3LD3410-1TL05		1	1 unit	1CL

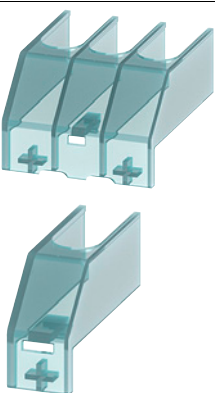
Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD3 main control and EMERGENCY-STOP switches from 16 to 63 A > Accessories NEW

Selection and ordering data

	Accessory part	Version	SD	Article No. www.siemens.com/ product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
			d					
 3LD9340-0B (left) 3LD9340-0C (right)	N switching contacts	• Front mounting, leading • Floor mounting, leading		3LD9340-0B		1	1 unit	1CL
				3LD9340-0C		1	1 unit	1CL
 3LD9340-2B (left) 3LD9340-2C (right)	N terminals	• Front mounting, through-type • Floor mounting, through-type		3LD9340-2B		1	1 unit	1CL
				3LD9340-2C		1	1 unit	1CL
 3LD9340-3B (left) 3LD9340-3C (right)	PE terminals	• Front mounting, through-type • Floor mounting, through-type		3LD9340-3B		1	1 unit	1CL
				3LD9340-3C		1	1 unit	1CL
 3LD9340-6B (left) 3LD9340-6C (right)	Auxiliary switches	• Front mounting, 1 NO + 1 NC • Floor mounting, 1 NO + 1 NC		3LD9340-6B		1	1 unit	1CL
				3LD9340-6C		1	1 unit	1CL
	Terminal covers	For 3LD3 3-pole switch disconnectors		3LD9341-0A		1	4 units	1CL
		For switch disconnectors with fourth pole		3LD9341-2A		1	4 units	1CL

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

NEW 3LD3 main control and EMERGENCY-STOP switches from 16 to 63 A > Accessories


Accessory part	Version	SD	Article No. www.siemens.com/ product?Article.No.	Price per PU	PU (UNIT, SET, M)	PS	PG
	Rotary operating mechanisms	Black Center-hole mounting 22.5 mm, front mounting with 66 x 66 mm masking plate, floor mounting for 3LD3.40 and 3LD3.48 For 6 x 6 mm shaft	3LD9344-2C		1	1 unit	1CL
		Red/yellow Center-hole mounting 22.5 mm, front mounting with 66 x 66 mm masking plate, floor mounting for 3LD3.40 and 3LD3.48 For 6 x 6 mm shaft	3LD9344-3C		1	1 unit	1CL
		Black Center-hole mounting 22.5 mm, front mounting for 3LD3.50 For 6 x 6 mm shaft	3LD9344-4C		1	1 unit	1CL
		Red/yellow Center-hole mounting 22.5 mm, front mounting for 3LD3.50 For 6 x 6 mm shaft	3LD9344-5C		1	1 unit	1CL
	Knob-operated mechanisms	Black, front mounting 48 x 48 mm, with coupling element	3LD9343-4C		1	1 unit	1CL
		Red/yellow, front mounting 48 x 48 mm, with coupling element	3LD9343-5C		1	1 unit	1CL
		Black, front mounting 48 x 48 mm, for shaft	3LD9343-6C		1	1 unit	1CL
		Red/yellow, front mounting 48 x 48 mm, for shaft	3LD9343-7C		1	1 unit	1CL

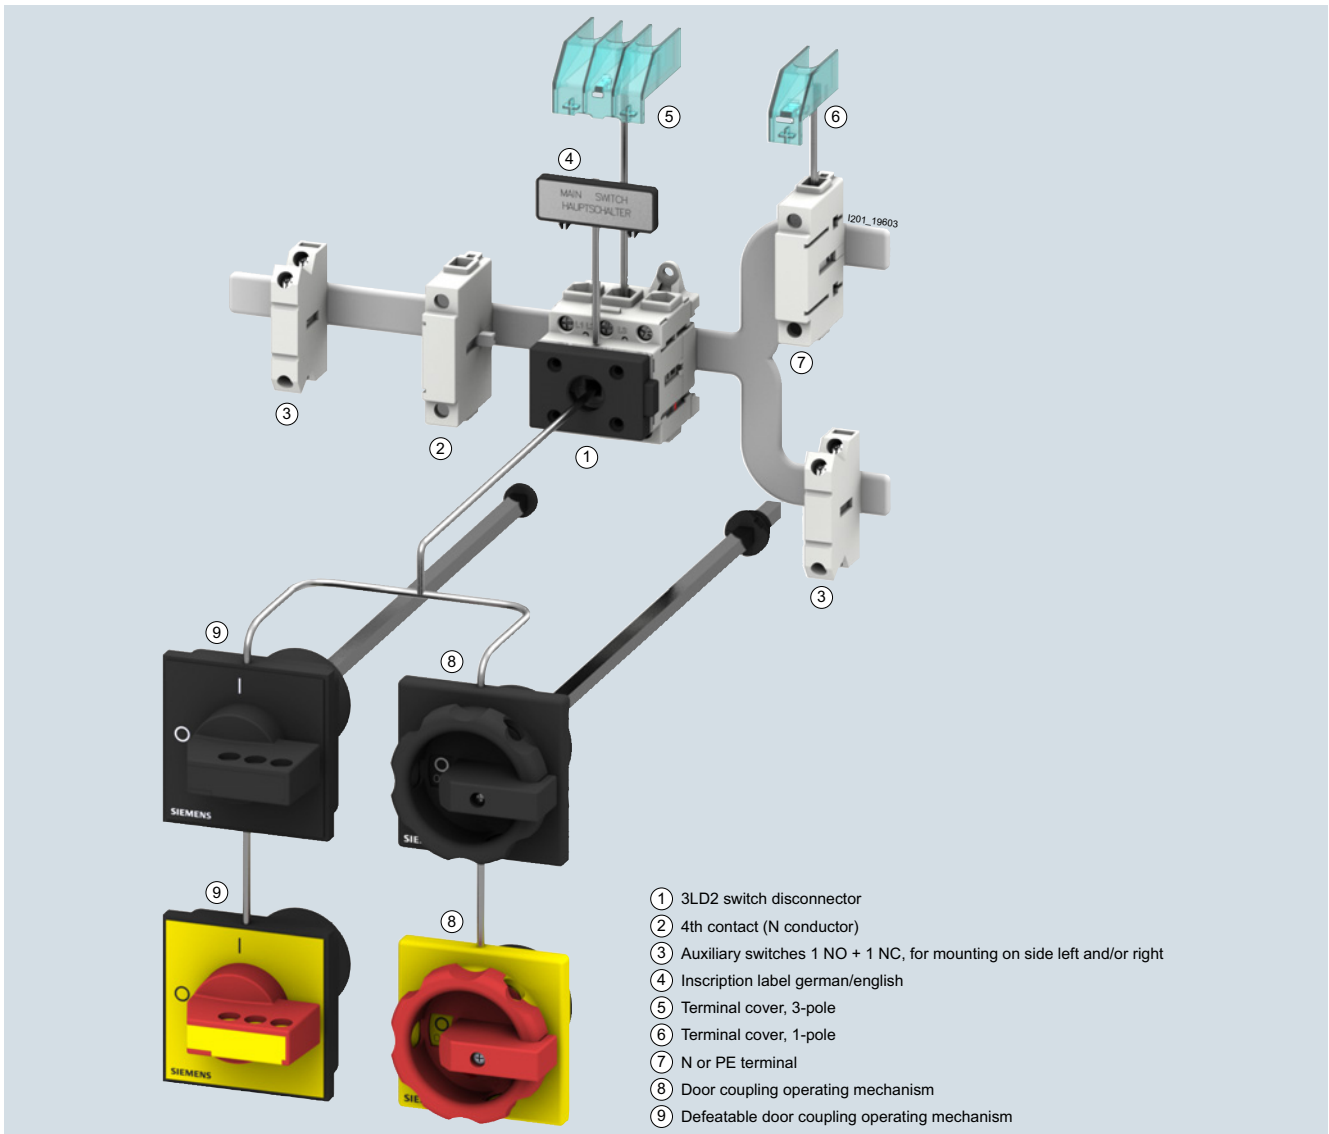
Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD3 main control and EMERGENCY-STOP switches from 16 to 63 A > Accessories NEW

	Accessory part	Version	SD	Article No. www.siemens.com/ product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
   	Door-coupling operating mechanisms	Red/yellow, knob-operated mechanism 48 x 48 mm, front mounting, with coupling element and shaft	d	3LD9343-5CA		1	1 unit	1CL
		Black, knob-operated mechanism 48 x 48 mm, front mounting, with coupling element and shaft		3LD9343-4CA		1	1 unit	1CL
		Red/yellow, rotary operating mechanism 66 x 66 mm, front mounting, with coupling element and shaft		3LD9344-3CA		1	1 unit	1CL
		Black, rotary operating mechanism 66 x 66 mm, front mounting, with coupling element and shaft		3LD9344-2CA		1	1 unit	1CL
  	Additional labels	German/English, "Hauptschalter/Main Switch" (10 units in package)		3LD9346-1A		1	10 units	1CL
		English/French "Main Switch/Interrupteur principal" (10 units in package)		3LD9346-2A		1	10 units	1CL
		Without inscription (10 units in package)		3LD9346-3A		1	10 units	1CL

Overview

The 3LD2 main control and EMERGENCY-STOP switches are manually operated switch disconnectors according to IEC 60947-3/VDE 0660 Part 107 (EN 60947-3) and comply with the conditions for switch disconnectors. In EN 60204-1 (VDE 0113 Part 1), these are called "disconnector units", while EMERGENCY-STOP switches are termed "devices for emergency shutdown".

The 3LD2 switches for 16 to 250 A are approved according to UL 508 and can be used as "manual motor controllers" and "motor disconnects". In addition, the 3LD switch disconnectors have CCC certification.

The 3LD2 main control and EMERGENCY-STOP switches are suitable for a current range from 16 to 250 A. These are suitable for main control, EMERGENCY-STOP, or repair switches and thus fulfill a wide range of requirements.

They are approved in line with IEC, UL, EAC, CSA, and CCC, as well as for use in shipbuilding.

Versions

- Five sizes with box terminal in 3, 4, and 6-pole version
- Front-mounting and floor mounting or distribution board mounting
- Front mounting by means of four-hole or center-hole mounting
- Switches in molded-plastic enclosure with degree of protection IP65
- DC isolators 800 V DC for PV installations
- Door-coupling rotary operating mechanism for operation of switch disconnector outside the control cabinet door
- Auxiliary switches for querying the switch positions, pre-installed or retrofittable

Benefits

- Compact design saves space
- High rated short-circuit currents
- Locking capability during maintenance work
- Comprehensive range of retrofittable accessories
- Comprehensive support through provision of CAx data

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD2 main control and EMERGENCY-STOP switches from 16 to 250 A > Introduction

Application

The 3LD2 switches are used in almost all power distribution systems for industry and infrastructure, but particularly those in main and auxiliary power distribution systems of commercial buildings and in domestic power supplies upstream of meters (e.g., SIPRO system).

Particularly for processing machines in mechanical and conveyor system engineering and in the chemical or food and beverage industries, these switches are now an essential part of

the hardware architecture as main control and EMERGENCY-STOP switches.

The 3LD2 switches can be used as:

- ON-OFF switches
- EMERGENCY-STOP switches
- Main control switches according to EN 60204-1

Design

Design of the contacts

Each switch has three adjacent contact elements¹⁾. A fourth leading contact element for switching the N conductor, a continuous PE terminal, an auxiliary switch (1 NO + 1 NC) can be fitted to each side of the switch. The auxiliary switches operate as leading contacts on opening. On opening, the NO contact opens before the main contacts, so that a contactor carries the switching power in the circuit and the maintenance or safety switch switches at zero current. On closing, the auxiliary switch switches later than or at the same time as the main contacts.

Design of rotary operating mechanisms

The rotary operating mechanisms of the switches for front or floor mounting are mounted on control cabinet doors, or on front or side panels with four-hole or center-hole mounting with a standard diameter of 22.5 mm and are operated from the outside. In their OFF position, they can be locked with up to three padlocks with a hasp thickness of 4 to 8 mm. Switching devices with defeatable door-coupling rotary operating mechanism are available in addition.

- Switch position indicator:
The switch position is clearly marked with direction arrows and an "O" for OFF and a "I" for ON at the front.
- Switches for front mounting:
The switches for front mounting are connected directly to the rotary operating mechanism through the fixing screws or – in the case of center-hole mounting – a special-purpose coupling.
- Switches for floor mounting:
The switches for floor mounting are snapped onto 35 mm standard mounting rails according to EN 60715 or screw-mounted on mounting plates. The actuators are connected to the lower section of the switch through a door coupling, which can be released in its zero position, and a 300 mm long switch shaft. When the control cabinet door is open, the switch can be protected against inadvertent operation by removing the switch shaft from the lower section of the switch. The overall depth can be adapted to individual requirements by adjusting the switch shaft length.
- Switches for distribution board mounting:
The switches for distribution board mounting are suited for operation in distribution boards and for switching inside control cabinets or distribution boards. They have cap and mounting dimensions to DIN 43880 and can be fitted under the same cover together with miniature circuit breakers. The selector switches can be locked in their OFF position with up to 2 padlocks with a hasp thickness of 4 to 6 mm.
- Switches in molded-plastic enclosure:
For surface mounting of individual main control and EMERGENCY-STOP switches, molded plastic-enclosed switches to degree of protection IP65 are used. The actuators can be locked in their OFF position with three padlocks with a hasp thickness of 4 to 8 mm. The molded-plastic enclosures each contain an N and/or a PE terminal.

¹⁾ 16 A versions have four contact elements; 3-pole transfer switches, see chapter "Transfer Switching Equipment and Load Transfer Switches" and six 6-pole contact elements.




3LD2704-0TK53 switch for front mounting with rotary operating mechanism



3LD2222-0TK1 switch for front mounting with knob



3LD2122-7UK01 3-pole transfer switch for front mounting with knob, see chapter "Transfer Switching Equipment and Load Transfer Switches"



3LD2103-3VK53 6-pole switch for front mounting with rotary operating mechanism



3LD2144-0TK53 switch for floor mounting with rotary operating mechanism and door coupling



3LD2530-0TK11 switch for distribution board mounting with knob



3LD2264-0TB5 switch in molded-plastic enclosure



3LD2217-1TL13 switch for floor mounting with rotary operating mechanism and defeatable door coupling



3LD2265-8VQ51-0AF6 DC isolator



3LD2418-0TK13 switch for floor mounting, 250 A, with rotary operating mechanism and door coupling

Technical specifications

Standards			DIN VDE 0660, IEC 60947								
Switches			Type	3LD20	3LD21	3LD22	3LD25	3LD27	3LD28	3LD23	3LD24
Rated insulation voltage U_i			V	690							
Rated operational voltage U_e			V AC	690							
Rated frequency			Hz	50 ... 60							
Rated impulse withstand voltage U_{imp}			kV	6	6	6	6	6	6	6	6
Rated short-time withstand current (1 s current, rms value)			A	340	640	640	1260	2000	2000	4000	4000
Short-circuit protection, max. back-up fuse (gL)			A	20	25	40	63	100	125	160	250
Rated conditional short-circuit current with upstream fuses at AC 50/60 Hz, 690 V			kA _{rms}	50	50	50	50	50	20	50	50
Maximum permissible let-through I^2t value			kA ² s	2.5	4	9	21	64	104	185	557
Permissible let-through current of the fuse			kA	3	3.5	4.5	6	10	10	15	15
Rated uninterrupted current I_u			A	16	25	32	63	100	125	160	250
AC-21A load-break switch	Rated operational current I_e	A	16	25	32	63	100	125	160	250	250
AC-3 motor load switches	Rated operational power										
Operational switching of individual motors	At 220 ... 240 V	kW	3.0	4.0	5.5	11.0	18.5	22.0	35.0	55.0	55.0
	At 380 ... 440 V	kW	5.5	7.5	9.5	18.5	30.0	37.0	50.0	110.0	110.0
	At 660/690 V	kW	5.5	7.5	9.5	15.0	22.0	30.0	37.0	45.0	45.0
AC-23A main control switch	Rated operational power										
Repair switch	At 220 ... 240 V	kW	4.0	5.0	6.0	11.0	18.5	22.0	45.0	75.0	75.0
frequent, but not operational switching	At 380 ... 440 V	kW	7.5	9.5	11.5	22.0	37.0	45.0	75.0	132.0	132.0
of individual motors	At 660/690 V	kW	7.5	9.5	11.5	18.5	30.0	37.0	45.0	55.0	55.0
Power loss per current path at I_e			W	0.5	1.1	1.8	4.5	7.5	12.0	36.0	36.0
Endurance mechanical			Operating cycles	100 000							
Switching frequency			1/h	50							
Permissible ambient temperature			°C	-25 ... +55							
Isolating features			Up to max.	V	690						
Conductor cross-sections for main conductors ¹⁾											
Solid or stranded			mm ²	1 ... 6	1.5 ... 16	1.5 ... 16	2.5 ... 35	4 ... 50	4 ... 50	16 ... 185	16 ... 185
Finely stranded with end sleeve (max.)			mm ²	4	10	10	16	35	35	150	150
Conductor cross-sections			Copper cable	AWG	18 ... 10	14 ... 8	14 ... 8	14 ... 6	12 ... 1	12 ... 1	
Torque for terminal			Nm	1.5 ... 2	2 ... 2.5	2 ... 2.5	2.5 ... 3	2.5 ... 3	2.5 ... 3	9.5 ... 10	9.5 ... 10
Touch protection according to EN 50274			Yes								
Auxiliary switches											
Rated insulation voltage U_i			V	500							
Rated operational voltage U_e			V AC	500							
Rated uninterrupted current I_u			A	10							
Rated operational current I_e , AC-15			A	6							
	At 120 V	A	3								
	At 220 ... 240 V	A	1.8								
	At 380 ... 415 V	A	1.4								
	At 500 V	A									
Short-circuit protection, aux. switch, max. back-up fuse (gL/gG)			A	10							
Conductor cross-sections for auxiliary conductors											
Connection type			Screw terminals								
Solid or stranded			mm ²	2 × (0.75 ... 2.5), 1 × 4							
Finely stranded with end sleeve			mm ²	2 × (0.75 ... 1.5), 1 × 2.5							
Torque for terminal			Nm	0.8							

¹⁾ Depending on the cable infeed, only small cross-sections are possible with devices in molded-plastic enclosures.

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD2 main control and EMERGENCY-STOP switches from 16 to 250 A > Introduction

3LD switches for UL/CSA as "manual motor controllers" ¹⁾

Standards		UL/CSA								
Switches		Type	3LD20	3LD21	3LD22	3LD25	3LD27	3LD28	3LD23	3LD24
Rated operational voltage U_e		V AC	600	600	600	600	600	600	600	600
Rated uninterrupted current I_u		A	10	20	30	60	100	125	160	250
	Current rating	A 600	A 600	A 600	A 600	--	--	--	--	--
	Pilot duty	P 600	P 600	P 600	P 600	--	--	--	--	--
Conventional thermal current I_{th}		A	16	25	32	63	100	125	160	250
Maximum rated power (AC-3)	3 ~ 120 V	HP	1	3	3	5	10	15	--	--
Alternating current motors 40 ... 60 Hz (HP = PS)	240 V	HP	3	7.5	10 (7.5) ²⁾	15	30	40	40	50
	480 V	HP	7.5	10	20 (15) ²⁾	40	60	75	75	100
	600 V	HP	10	15	30 (20) ²⁾	50	75	100	75	75
	1 ~ 120 V	HP	0.5	2	2	3	--	--	--	--
	240 V	HP	1.5	3	3	10	--	--	--	--
Conductor cross-sections	Cu cable	AWG	18 ... 10	14 ... 8	14 ... 8	14 ... 6	12 ... 1	12 ... 1	1 ... MCM400	
Torque		Nm	1.5 ... 2	2 ... 2.5	2 ... 2.5	2.5 ... 3	2.5 ... 3	2.5 ... 3	10	10

¹⁾ The 3LD switches for UL/CSA are approved in accordance with UL/CSA as "manual motor controllers", and they can be used as repair switches in the molded-plastic enclosure, for example. However, they do not have UL approval.

²⁾ Values in brackets apply to devices in molded-plastic enclosure.

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD2 main control and EMERGENCY-STOP switches from 16 to 250 A > Front mounting

Selection and ordering data

Number and version of the contacts		Rated data at 50 ... 60 Hz, 380 ... 440 V		SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
Main contact elements	Auxiliary contact elements	P/AC-3	P/AC-23A	I_n /AC-21A	www.siemens.com/product?ArticleNo.				
		kW	kW	A	d				
Main control and EMERGENCY-STOP switches with rotary operating mechanism/knob-operated mechanism - Lockable in 0 position with up to 3 padlocks: 3LD20 to 3LD28: Hasp thickness from 4 to 8 mm 3LD23 and 3LD24: Hasp thickness from 4 to 6 mm - Degree of protection at front side IP65 - All versions with rotary operating mechanism, exception: 3LD23, 3LD24 with knob-operated mechanism - Including terminal cover for the infeed side - Front plate: 3LD20, 3LD21, 3LD22: 67 x 67 mm 3LD25 to 3LD28: 90 x 90 mm 3LD23 to 3LD24: 96 x 96 mm									
Four-hole mounting									
	3	--	5.5	7.5	16	3LD2003-0TK5□	1	1 unit	1CL
			7.5	9.5	25	3LD2103-0TK5□	1	1 unit	1CL
			9.5	11.5	32	3LD2203-0TK5□	1	1 unit	1CL
			18.5	22.0	63	3LD2504-0TK5□	1	1 unit	1CL
			30	37.0	100	3LD2704-0TK5□	1	1 unit	1CL
			37	45.0	125	3LD2804-0TK5□	1	1 unit	1CL
			50	75.0	160	3LD2305-0TK1□	1	1 unit	1CL
			110	132.0	250	3LD2405-0TK1□	1	1 unit	1CL
	3 + N	--	5.5	7.5	16	3LD2003-1TL5□	1	1 unit	1CL
			7.5	9.5	25	3LD2103-1TL5□	1	1 unit	1CL
			9.5	11.5	32	3LD2203-1TL5□	1	1 unit	1CL
			18.5	22.0	63	3LD2504-1TL5□	1	1 unit	1CL
			30.0	37.0	100	3LD2704-0TK5□ + ¹⁾	1	1 unit	1CL
						3LD9280-0B	1	1 unit	1CL
			37.0	45.0	125	3LD2804-0TK5□ + ¹⁾	1	1 unit	1CL
						3LD9280-0B	1	1 unit	1CL
			50	75.0	160	3LD2305-1TL1□	1	1 unit	1CL
			110	132.0	250	3LD2405-1TL1□	1	1 unit	1CL
	3	1 NO + 1 NC	5.5	7.5	16	3LD2003-1TP5□	1	1 unit	1CL
			7.5	9.5	25	3LD2103-1TP5□	1	1 unit	1CL
			9.5	11.5	32	3LD2203-1TP5□	1	1 unit	1CL
			18.5	22.0	63	3LD2504-1TP5□	1	1 unit	1CL
			30.0	37.0	100	3LD2704-1TP5□	1	1 unit	1CL
			37	45.0	125	3LD2804-1TP5□	1	1 unit	1CL
			50.0	75.0	160	3LD2305-0TK1□ + ²⁾	1	1 unit	1CL
						3LD9200-5B	1	1 unit	1CL
			110.0	132.0	250	3LD2405-0TK1□ + ²⁾	1	1 unit	1CL
						3LD9200-5B	1	1 unit	1CL
	3 + N	1 NO + 1 NC	5.5	7.5	16	3LD2003-2EP5□	1	1 unit	1CL
			7.5	9.5	25	3LD2103-2EP5□	1	1 unit	1CL
			9.5	11.5	32	3LD2203-1TL5□ + ²⁾	1	1 unit	1CL
						3LD9200-5B	1	1 unit	1CL
			18.5	22.0	63	3LD2504-1TP5□ + ¹⁾	1	1 unit	1CL
						3LD9250-0BA	1	1 unit	1CL
			30.0	37.0	100	3LD2704-0TK5□ + ¹⁾	1	1 unit	1CL
						3LD9280-0B + ²⁾	1	1 unit	1CL
						3LD9200-5B	1	1 unit	1CL
			37.0	45.0	125	3LD2804-0TK5□ + ¹⁾	1	1 unit	1CL
						3LD9280-0B + ²⁾	1	1 unit	1CL
						3LD9200-5B	1	1 unit	1CL
			50.0	75.0	160	3LD2305-1TL1□ + ²⁾	1	1 unit	1CL
						3LD9200-5B	1	1 unit	1CL
			110.0	132.0	250	3LD2405-1TL1□ + ²⁾	1	1 unit	1CL
						3LD9200-5B	1	1 unit	1CL

¹⁾ 4th contact element as N conductor ordered separately, see page 7/39, Accessories.

²⁾ Auxiliary switches 1 NO + 1 NC to be ordered separately, see page 7/39, Accessories.

Actuator color

Black

Red/yellow (EMERGENCY-STOP)

1
3

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD2 main control and EMERGENCY-STOP switches from 16 to 250 A > Front mounting

Number and version of the contacts		Rated data at 50 ... 60 Hz, 380 ... 440 V			SD	Article No. www.siemens.com/product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
Main contact elements	Auxiliary contact elements	P/AC-3	P/AC-23A	I _N /AC-21A	d					
		kW	kW	A						
Main control and EMERGENCY-STOP switches with direct operating mechanism (rotary operating mechanism) - Lockable in 0 position with up to 3 padlocks with a hasp thickness of 4 to 8 mm - Degree of protection at front side IP65 - All versions with rotary operating mechanism - Including terminal cover for the infeed side - Front plate 3LD20, 3LD21, 3LD22: 67 x 67 mm 3LD25: 90 x 90 mm										

Center-hole mounting Ø 22.5 mm



3LD2254-0TK53

3	--		5.5	7.5	16	3LD2054-0TK5□	1	1 unit	1CL
			7.5	9.5	25	3LD2154-0TK5□	1	1 unit	1CL
			9.5	11.5	32	3LD2254-0TK5□	1	1 unit	1CL
			18.5	22	63	3LD2555-0TK5□	1	1 unit	1CL
3 + N	--		5.5	7.5	16	3LD2054-1TL5□	1	1 unit	1CL
			7.5	9.5	25	3LD2154-1TL5□	1	1 unit	1CL
			9.5	11.5	32	3LD2254-1TL5□	1	1 unit	1CL
			18.5	22	63	3LD2555-0TK5□ + ¹⁾	1	1 unit	1CL
3	1 NO + 1 NC		5.5	7.5	16	3LD9250-0BA	1	1 unit	1CL
			7.5	9.5	25	3LD2054-1TP5□	1	1 unit	1CL
			9.5	11.5	32	3LD2154-1TP5□	1	1 unit	1CL
			18.5	22	63	3LD2254-0TK5□ + ²⁾	1	1 unit	1CL
3 + N	1 NO + 1 NC		5.5	7.5	16	3LD9200-5B	1	1 unit	1CL
			7.5	9.5	25	3LD2054-2EP5□	1	1 unit	1CL
			9.5	11.5	32	3LD2154-2EP5□	1	1 unit	1CL
			18.5	22	63	3LD2254-1TL5□ + ²⁾	1	1 unit	1CL
3 + N	1 NO + 1 NC		5.5	7.5	16	3LD9200-5B	1	1 unit	1CL
			7.5	9.5	25	3LD2054-2EP5□	1	1 unit	1CL
			9.5	11.5	32	3LD2154-2EP5□	1	1 unit	1CL
			18.5	22	63	3LD2254-1TL5□ + ²⁾	1	1 unit	1CL
3 + N	1 NO + 1 NC		5.5	7.5	16	3LD2555-0TK5□ + ¹⁾	1	1 unit	1CL
			7.5	9.5	25	3LD9250-0BA	1	1 unit	1CL
			9.5	11.5	32	3LD2154-2EP5□	1	1 unit	1CL
			18.5	22	63	3LD2254-1TL5□ + ²⁾	1	1 unit	1CL

Actuator color

Black

Red/yellow (EMERGENCY-STOP)

1
3

¹⁾ 4th contact element as N conductor to be ordered separately, see page 7/39, Accessories.

²⁾ Auxiliary switches 1 NO + 1 NC to be ordered separately, see page 7/39, Accessories.

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD2 main control and EMERGENCY-STOP switches from 16 to 250 A > Front mounting

Number and version of the contacts		Rated data 50 ... 60 Hz, 380 ... 440 V		SD	Article No. www.siemens.com/product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
Main contact elements	Auxiliary contact elements	P/AC-23A kW	I_u A	d					
Main control and EMERGENCY-STOP switches with direct operating mechanism (knob-operated mechanism) • Lockable in 0 position (can be modified to I position) with max. 2 padlocks with a hasp thickness of 4 to 6 mm • Degree of protection at front side IP65 • Including terminal cover for the infeed side • Front plate - 48 x 48 mm									
Four-hole mounting									
 3LD2222-0TK11	3	--	7.5	16	3LD2022-0TK1□		1	1 unit	1CL
			9.5	25	3LD2122-0TK1□		1	1 unit	1CL
			11.5	32	3LD2222-0TK1□		1	1 unit	1CL
	3 + N	--	7.5	16	3LD2022-1TL1□		1	1 unit	1CL
			9.5	25	3LD2122-1TL1□		1	1 unit	1CL
			11.5	32	3LD2222-0TK1□ + ¹⁾		1	1 unit	1CL
					3LD9220-0B		1	1 unit	1CL
	3	1 NO + 1 NC	7.5	16	3LD2022-0TK1□ + ²⁾		1	1 unit	1CL
					3LD9200-5B		1	1 unit	1CL
			9.5	25	3LD2122-0TK1□ + ²⁾		1	1 unit	1CL
					3LD9200-5B		1	1 unit	1CL
			11.5	32	3LD2222-0TK1□ + ²⁾		1	1 unit	1CL
					3LD9200-5B		1	1 unit	1CL
	3 + N	1 NO + 1 NC	7.5	16	3LD2022-1TL1□ + ²⁾		1	1 unit	1CL
					3LD9200-5B		1	1 unit	1CL
			9.5	25	3LD2122-1TL1□ + ²⁾		1	1 unit	1CL
					3LD9200-5B		1	1 unit	1CL
			11.5	32	3LD2222-0TK1□ + ¹⁾		1	1 unit	1CL
					3LD9220-0B		1	1 unit	1CL
					3LD9200-5B		1	1 unit	1CL

Actuator color

Black

Red/yellow (EMERGENCY-STOP)

1
3

¹⁾ 4th contact element as N conductor to be ordered separately,
see page 7/39, Accessories.

²⁾ Auxiliary switches 1 NO + 1 NC to be ordered separately,
see page 7/39, Accessories.

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD2 main control and EMERGENCY-STOP switches from 16 to 250 A > Front mounting

Number and version of the contacts		Rated data at 50 ... 60 Hz, 380 ... 440 V		SD	Article No. www.siemens.com/product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
Main contact elements	Auxiliary contact elements	P/AC-23A	I_u	d					
		kW	A						
Main control and EMERGENCY-STOP switches with direct operating mechanism (knob-operated mechanism) • Lockable in 0 position (can be modified to I position) with max. 2 padlocks with a hasp thickness of 4 to 6 mm • Degree of protection at front side IP65 • Including terminal cover for the infeed side • Front plate: 48 x 48 mm									
Center-hole mounting Ø 22.5 mm									
 3LD2150-0TK13	3	--	7.5	16	3LD2050-0TK1□		1	1 unit	1CL
			9.5	25	3LD2150-0TK1□		1	1 unit	1CL
			11.5	32	3LD2250-0TK1□		1	1 unit	1CL
	3 + N	--	7.5	16	3LD2050-1TL1□		1	1 unit	1CL
			9.5	25	3LD2150-0TK1□ + ²⁾		1	1 unit	1CL
					3LD9200-5B		1	1 unit	1CL
			11.5	32	3LD2250-0TK1□ + ²⁾		1	1 unit	1CL
					3LD9200-5B		1	1 unit	1CL
	3	1 NO + 1 NC	7.5	16	3LD2050-0TK1□ + ²⁾		1	1 unit	1CL
					3LD9200-5B		1	1 unit	1CL
			9.5	25	3LD2150-0TK1□ + ²⁾		1	1 unit	1CL
					3LD9200-5B		1	1 unit	1CL
			11.5	32	3LD2250-0TK1□ + ²⁾		1	1 unit	1CL
					3LD9200-5B		1	1 unit	1CL
	3 + N	1 NO + 1 NC	7.5	16	3LD2050-1TL1□ + ²⁾		1	1 unit	1CL
					3LD9200-5B		1	1 unit	1CL
			9.5	25	3LD2150-0TK1□ + ¹⁾		1	1 unit	1CL
					3LD9220-0B + ²⁾		1	1 unit	1CL
					3LD9200-5B		1	1 unit	1CL
			11.5	32	3LD2250-0TK1□ + ¹⁾		1	1 unit	1CL
					3LD9220-0B + ²⁾		1	1 unit	1CL
					3LD9200-5B		1	1 unit	1CL

Actuator color

Black

Red/yellow (EMERGENCY-STOP)

1

3

¹⁾ 4th contact element as N conductor to be ordered separately, see page 7/39, Accessories.

²⁾ Auxiliary switches 1 NO + 1 NC to be ordered separately, see page 7/39, Accessories.

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD2 main control and EMERGENCY-STOP switches from 16 to 250 A > Front mounting

Number and version of the contacts		Rated data at 50 ... 60 Hz, 380 ... 440 V			SD	Article No. www.siemens.com/ product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
Main contact elements	Auxiliary contact elements	P/AC-3 kW	P/AC-23A kW	I_u A	d					
Main control and EMERGENCY-STOP switches with direct operating mechanism (rotary operating mechanism/knob-operated mechanism), 6-pole - Lockable in 0 position with up to 3 padlocks: 3LD20 to 3LD28: Hasp thickness from 4 to 8 mm 3LD23 and 3LD24: Hasp thickness from 4 to 6 mm - Degree of protection at front side IP65 - All versions with rotary operating mechanism Exception: 3LD23 and 3LD24 with knob-operated mechanism - Including terminal cover for the infeed side - Front plate 3LD20, 3LD21, 3LD22: 67 x 67 mm 3LD25: 90 x 90 mm 3LD23 to 3LD24: 96 x 96 mm										
Four-hole mounting										
 3LD2103-3VK53	6	--	7.5	9.5	25	3LD2103-3VK5□		1	1 unit	1CL
			9.5	11.5	32	3LD2203-3VK5□		1	1 unit	1CL
			18.5	22.0	63	3LD2504-3VK5□		1	1 unit	1CL
			50	75	160	3LD2305-3VK1□		1	1 unit	1CL
			110	132	250	3LD2405-3VK1□		1	1 unit	1CL
	6	1 NO + 1 NC	7.5	9.5	25	3LD2103-4VP5□		1	1 unit	1CL
Actuator color										
Black										
Red/yellow (EMERGENCY-STOP)										
						1 3				

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD2 main control and EMERGENCY-STOP switches from 16 to 250 A > Floor mounting

Selection and ordering data

Number and version of the contacts		Rated data at 50 ... 60 Hz, 380 ... 440 V		SD	Article No. www.siemens.com/product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
Main contact elements	Auxiliary contact elements	P/AC-23A	I_u	d					
		kW	A						
Main control and EMERGENCY-STOP switches with door-coupling rotary operating mechanism • With shaft • Lockable in 0 position with up to 3 padlocks: - 3LD20 to 3LD28: Hasp thickness from 4 to 8 mm - 3LD23 and 3LD24: Hasp thickness from 4 to 6 mm • Degree of protection at front side IP65 • Door-coupling rotary operating mechanism with integrated tolerance compensation (16 to 125 A) • All versions with rotary operating mechanism Exception: 3LD23 and 3LD24 with knob-operated mechanism • Mounting using screws or snap-on mounting on 35 mm standard mounting rail (16 to 125 A) • Including terminal cover for the infeed side • Front plate - 3LD20, 3LD21, 3LD22: 67 x 67 mm - 3LD25 to 3LD28: 90 x 90 mm - 3LD23 to 3LD24: 96 x 96 mm • Mounting dimensions - 3LD20, 3LD21, 3LD22: 380 mm - 3LD25 to 3LD28: 390 mm - 3LD23 to 3LD24: 600 mm									
Four-hole mounting									
 3LD2213-0TK53	3	--	7.5	16	3LD2013-0TK5□		1	1 unit	1CL
			9.5	25	3LD2113-0TK5□		1	1 unit	1CL
			11.5	32	3LD2213-0TK5□		1	1 unit	1CL
			22	63	3LD2514-0TK5□		1	1 unit	1CL
			37	100	3LD2714-0TK5□		1	1 unit	1CL
			45	125	3LD2814-0TK5□		1	1 unit	1CL
			75	160	3LD2318-0TK1□		1	1 unit	1CL
			132	250	3LD2418-0TK1□		1	1 unit	1CL
	3 + N	--	7.5	16	3LD2013-1TL5□		1	1 unit	1CL
			9.5	25	3LD2113-1TL5□		1	1 unit	1CL
			11.5	32	3LD2213-1TL5□		1	1 unit	1CL
			22	63	3LD2514-1TL5□		1	1 unit	1CL
			37	100	3LD2714-0TK5□ + ¹⁾		1	1 unit	1CL
					3LD9280-0C		1	1 unit	1CL
			45	125	3LD2814-0TK5□ + ¹⁾		1	1 unit	1CL
					3LD9280-0C		1	1 unit	1CL
			75	160	3LD2318-1TL1□		1	1 unit	1CL
			132	250	3LD2418-1TL1□		1	1 unit	1CL

Actuator color

Black

Red/yellow (EMERGENCY-STOP)

1

3

¹⁾ 4th contact element as N conductor to be ordered separately, see page 7/39, Accessories.

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD2 main control and EMERGENCY-STOP switches from 16 to 250 A > Floor mounting

	Number and version of the contacts		Rated data at 50 .. 60 Hz, 380 ... 440 V		SD	Article No. www.siemens.com/product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
	Main contact elements	Auxiliary contact elements	P/AC-23A	I_u						
			kW	A						
 3LD2213-0TK53	3	1 NO + 1 NC	7.5	16	d	3LD2013-0TK5□ + ²⁾		1	1 unit	1CL
						3LD9200-5C		1	1 unit	1CL
			9.5	25		3LD2113-0TK5□ + ²⁾		1	1 unit	1CL
						3LD9200-5C		1	1 unit	1CL
			11.5	32		3LD2213-0TK5□ + ²⁾		1	1 unit	1CL
						3LD9200-5C		1	1 unit	1CL
			22	63		3LD2514-0TK5□ + ²⁾		1	1 unit	1CL
						3LD9200-5C		1	1 unit	1CL
			37	100		3LD2714-0TK5□ + ²⁾		1	1 unit	1CL
						3LD9200-5C		1	1 unit	1CL
			45	125		3LD2814-0TK5□ + ²⁾		1	1 unit	1CL
						3LD9200-5C		1	1 unit	1CL
			75	160		3LD2318-0TK1□ + ²⁾		1	1 unit	1CL
						3LD9200-5C		1	1 unit	1CL
			132	250		3LD2418-0TK1□ + ²⁾		1	1 unit	1CL
						3LD9200-5C		1	1 unit	1CL
	3 + N	1 NO + 1 NC	7.5	16		3LD2013-1TL5□ + ²⁾		1	1 unit	1CL
						3LD9200-5C		1	1 unit	1CL
			9.5	25		3LD2113-1TL5□ + ²⁾		1	1 unit	1CL
						3LD9200-5C		1	1 unit	1CL
			11.5	32		3LD2213-1TL5□ + ²⁾		1	1 unit	1CL
						3LD9200-5C		1	1 unit	1CL
			22	63		3LD2514-1TL5□ + ²⁾		1	1 unit	1CL
						3LD9200-5C		1	1 unit	1CL
			37	100		3LD2714-0TK5□ + ¹⁾		1	1 unit	1CL
						3LD9280-0C + ²⁾		1	1 unit	1CL
						3LD9200-5C		1	1 unit	1CL
			45	125		3LD2814-0TK5□ + ¹⁾		1	1 unit	1CL
						3LD9280-0C + ²⁾		1	1 unit	1CL
						3LD9200-5C		1	1 unit	1CL
			75	160		3LD2318-1TL1□ + ²⁾		1	1 unit	1CL
						3LD9200-5C		1	1 unit	1CL
			132	250		3LD2418-1TL1□ + ²⁾		1	1 unit	1CL
						3LD9200-5C		1	1 unit	1CL

Actuator color

Black

Red/yellow (EMERGENCY-STOP)

1

3

¹⁾ 4th contact element as N conductor to be ordered separately, see page 7/39, Accessories.

²⁾ Auxiliary switches 1 NO + 1 NC to be ordered separately, see page 7/39, Accessories.

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD2 main control and EMERGENCY-STOP switches from 16 to 250 A > Floor mounting

Number and version of the contacts		Rated data at 50 ... 60 Hz, 380 ... 440 V		SD	Article No. www.siemens.com/product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
Main contact elements	Auxiliary contact elements	P/AC-23A	I_u						
		kW	A	d					
Main control and EMERGENCY-STOP switches with door-coupling rotary operating mechanism • With shaft • Lockable in 0 position with up to 3 padlocks: - 3LD20 to 3LD28: Hasp thickness from 4 to 8 mm - 3LD23 and 3LD24: Hasp thickness from 4 to 6 mm • Degree of protection at front side IP65 • Door-coupling rotary operating mechanism with integrated tolerance compensation (16 to 125 A) • All versions with rotary operating mechanism • Mounting using screws or snap-on mounting on 35 mm standard mounting rail (16 to 125 A) • Including terminal cover for the infeed side • Front plate - 3LD20, 3LD21, 3LD22: 67 x 67 mm - 3LD25: 90 x 90 mm • Mounting dimensions - 3LD20, 3LD21, 3LD22: 380 mm - 3LD25: 390 mm									
Center-hole mounting Ø 22.5 mm									
 3LD2144-0TK53	3	--	7.5	16	3LD2044-0TK5□		1	1 unit	1CL
			9.5	25	3LD2144-0TK5□		1	1 unit	1CL
			11.5	32	3LD2244-0TK5□		1	1 unit	1CL
			22	63	3LD2545-0TK5□		1	1 unit	1CL
	3 + N	--	7.5	16	3LD2044-1TL5□		1	1 unit	1CL
			9.5	25	3LD2144-1TL5□		1	1 unit	1CL
			11.5	32	3LD2244-1TL5□		1	1 unit	1CL
			22	63	3LD2545-0TK5□ ¹⁾		1	1 unit	1CL
					3LD9250-OCA		1	1 unit	1CL
	3	1 NO + 1 NC	7.5	16	3LD2044-0TK5□ ²⁾		1	1 unit	1CL
					3LD9200-5C		1	1 unit	1CL
			9.5	25	3LD2144-0TK5□ ²⁾		1	1 unit	1CL
					3LD9200-5C		1	1 unit	1CL
			11.5	32	3LD2244-0TK5□ ²⁾		1	1 unit	1CL
					3LD9200-5C		1	1 unit	1CL
			22	63	3LD2545-0TK5□ ²⁾		1	1 unit	1CL
					3LD9200-5C		1	1 unit	1CL
	3 + N	1 NO + 1 NC	7.5	16	3LD2044-1TL5□ ²⁾		1	1 unit	1CL
					3LD9200-5C		1	1 unit	1CL
			9.5	25	3LD2144-1TL5□ ²⁾		1	1 unit	1CL
					3LD9200-5C		1	1 unit	1CL
			11.5	32	3LD2244-1TL5□ ²⁾		1	1 unit	1CL
					3LD9200-5C		1	1 unit	1CL
			22	63	3LD2545-0TK5□ ¹⁾		1	1 unit	1CL
					3LD9250-OCA		1	1 unit	1CL
					3LD9200-5C		1	1 unit	1CL

Actuator color

Black

Red/yellow (EMERGENCY-STOP)

1

3

¹⁾ 4th contact element as N conductor to be ordered separately, see page 7/39, Accessories.

²⁾ Auxiliary switches 1 NO + 1 NC to be ordered separately, see page 7/39, Accessories.

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD2 main control and EMERGENCY-STOP switches from 16 to 250 A > Floor mounting

Number and version of the contacts		Rated data at 50 Hz ... 60 Hz, 380 V ... 440 V			SD	Article No. www.siemens.com/product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
Main contact elements	Auxiliary contact elements	P/AC-3	P/AC-23A	I _u						
		kW	kW	A	d					
Main control and EMERGENCY-STOP switches with door-coupling rotary operating mechanism (6-pole) • Lockable in 0 position with up to 3 padlocks with a hasp thickness of 4 to 8 mm • Degree of protection at front side IP65 • Door-coupling rotary operating mechanism with integrated tolerance compensation (for 3LD21) • All versions with rotary operating mechanism Exception: 3LD23 and 3LD24 with door-coupling rotary operating mechanism as selector switch • Mounting using screws or snap-on mounting on 35 mm standard mounting rails • Including terminal cover for the infeed side • Front plate - 3LD20, 3LD21, 3LD22: 67 x 67 mm - 3LD23, 3LD24: 96 x 96 mm										
Four-hole mounting										
	6	--	7.5	9.5	25	3LD2113-3VK5□		1	1 unit	1CL
	6	--	50	75	160	3LD2318-3VK1□		1	1 unit	1CL
	6	--	110	132	250	3LD2418-3VK1□		1	1 unit	1CL
	6	1 NO + 1 NC	9.5	9.5	25	3LD2113-4VP5□		1	1 unit	1CL

3LD2113-3VK51

Actuator color

Black
Red/yellow (EMERGENCY-STOP)

1
3

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD2 main control and EMERGENCY-STOP switches from 16 to 250 A > Floor mounting

Number and version of the contacts		Rated data at 50 ... 60 Hz, 380 ... 440 V		SD	Article No. www.siemens.com/product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
Main contact elements	Auxiliary contact elements	P/AC-23A	I_u						
		kW	A	d					
Main control and EMERGENCY-STOP switches with defeatable door-coupling rotary operating mechanism (as knob-operated mechanism) The 3LD main control and EMERGENCY-STOP switch with defeatable door-coupling rotary operating mechanism enables you to conduct repairs, maintenance work or tests on electrical plants and machines without having to interrupt their operation. With the help of the defeatable door-coupling rotary operating mechanism, an electrician can bypass locking in the ON position and open the control cabinet door with the plant activated. 3LD main control and EMERGENCY-STOP switches with defeatable door-coupling rotary operating mechanism are approved according to UL 508. • With 300 mm switch shaft • Lockable in 0 position with up to 3 padlocks with a hasp thickness of 4 to 6 mm • Degree of protection at front side IP65 • Door-coupling rotary operating mechanism as knob-operated mechanism with integrated tolerance compensation • Mounting using screws or snap-on mounting on 35 mm standard mounting rails • Including terminal cover for the infeed side • Front plate 65 x 65 mm									
Four-hole mounting									
 3LD2017-0TK..	3	--	7.5	16	3LD2017-0TK1□		1	1 unit	1CL
			11.5	32	3LD2217-0TK1□		1	1 unit	1CL
			22	63	3LD2517-0TK1□		1	1 unit	1CL
	3 + N	--	7.5	16	3LD2017-1TL1□		1	1 unit	1CL
			11.5	32	3LD2217-1TL1□		1	1 unit	1CL
			22	63	3LD2517-1TL1□		1	1 unit	1CL

Actuator color

Black
Red/yellow (EMERGENCY-STOP)



1
3

Accessories**Defeatable door-coupling rotary operating mechanisms from 100 A to 250 A**

For switch disconnectors with door-coupling rotary operating mechanisms, a defeatable door-coupling rotary operating mechanism can be assembled with the following components from the 8UC7 series.

The following components are to be used for this purpose:

- For switch disconnectors with 3LD27 and 3LD28 door-coupling rotary operating mechanisms:
 - 8UC7110-1BB
 - 8UC7120-3BB
 - 8UC6011
- For switch disconnectors with 3LD23 and 3LD24 door-coupling rotary operating mechanisms:
 - 8UC7210-1BB
 - 8UC7220-3BB
 - 8UC6012

	Rotary operating mechanisms	Size	Cross-section of the actuating shaft	Version ²⁾	SD	Individual parts for 8UC7 door-coupling rotary operating mechanisms Article No. www.siemens.com/product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
	Type		mm x mm		d					
Components for 3LD27, 3LD28										
 8UC71	8UC71	1	6 x 6	Standard EMERGENCY-STOP		8UC7110-1BB 8UC7120-3BB		1	1 unit	1CL
								1	1 unit	1CL
 8UC6011	8UC71	1	6 x 6	--		8UC6011		1	1 unit	1CL
Components for 3LD23, 3LD24										
 8UC72	8UC72	2	8 x 8	Standard EMERGENCY-STOP		8UC7210-1BB 8UC7220-3BB		1	1 unit	1CL
								1	1 unit	1CL
 8UC6012	8UC72	2	8 x 8	--		8UC6012		1	1 unit	1CL

¹⁾ Non-interchangeability features.

²⁾ Standard: Ti-gray handle, light-gray masking plate;
EMERGENCY-STOP: Red handle, yellow masking plate.

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD2 main control and EMERGENCY-STOP switches from 16 to 250 A > Distribution board mounting

Selection and ordering data

Number and version of the contacts		Rated data at 50 ... 60 Hz, 380 ... 440 V		SD	Article No. www.siemens.com/product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
Main contact elements	Auxiliary contact elements	P/AC-23A	I_u	d					
		kW	A						
ON/OFF and EMERGENCY-STOP switches with masking plate and selector knob - With screw fixing - With snap-on mounting on 35 mm standard mounting rail (16 to 125 A) - Lockable in 0 position with up to 2 padlocks with a hasp thickness of 4 to 6 mm (160 A) or up to 3 padlocks with a hasp thickness of 4 to 6 mm (250 A) - Degree of protection at front side IP44 - Including terminal cover for the infeed side (160 A and 250 A only)									
 3LD2530-0TK13	3	--	7.5	16	3LD2030-0TK1□		1	1 unit	1CL
			9.5	25	3LD2130-0TK1□		1	1 unit	1CL
			11.5	32	3LD2230-0TK1□		1	1 unit	1CL
			22	63	3LD2530-0TK1□		1	1 unit	1CL
			37	100	3LD2730-0TK1□		1	1 unit	1CL
			45	125	3LD2830-0TK1□		1	1 unit	1CL
			75	160	3LD2330-0TK1□		1	1 unit	1CL
			132	250	3LD2430-0TK1□		1	1 unit	1CL
 3LD2330-0TK11	3 + N	--	7.5	16	3LD2030-1TL1□		1	1 unit	1CL
			9.5	25	3LD2130-0TK1□ + ¹⁾		1	1 unit	1CL
					3LD9220-0C		1	1 unit	1CL
			11.5	32	3LD2230-0TK1□ + ¹⁾		1	1 unit	1CL
					3LD9220-0C		1	1 unit	1CL
			22	63	3LD2530-0TK1□ + ¹⁾		1	1 unit	1CL
					3LD9250-0CA		1	1 unit	1CL
			37	100	3LD2730-0TK1□ + ¹⁾		1	1 unit	1CL
					3LD9280-0C		1	1 unit	1CL
			45	125	3LD2830-0TK1□ + ¹⁾		1	1 unit	1CL
					3LD9280-0C		1	1 unit	1CL
			75	160	3LD2330-0TK1□ + ¹⁾		1	1 unit	1CL
					3LD9240-0C		1	1 unit	1CL
			132	250	3LD2430-0TK1□ + ¹⁾		1	1 unit	1CL
					3LD9240-0C		1	1 unit	1CL

Actuator color

Black

Red/yellow (EMERGENCY-STOP)

1

3

¹⁾ 4th contact element as N conductor to be ordered separately, see page 7/39, "Accessories, accessories for floor mounting".

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD2 main control and EMERGENCY-STOP switches from 16 to 250 A > Distribution board mounting

Number and version of the contacts		Rated data at 50 ... 60 Hz, 380 ... 440 V		SD	Article No. www.siemens.com/product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
Main contact elements	Auxiliary contact elements	P/AC-23A	I_u	d					
 3LD2530-0TK11	3	1 NO + 1 NC	kW	A	d				
			7.5	16	3LD2030-0TK1□ +2)		1	1 unit	1CL
					3LD9200-5C		1	1 unit	1CL
			9.5	25	3LD2130-0TK1□ +2)		1	1 unit	1CL
					3LD9200-5C		1	1 unit	1CL
			11.5	32	3LD2230-0TK1□ +2)		1	1 unit	1CL
					3LD9200-5C		1	1 unit	1CL
			22	63	3LD2530-0TK1□ +2)		1	1 unit	1CL
					3LD9200-5C		1	1 unit	1CL
			37	100	3LD2730-0TK1□ +2)		1	1 unit	1CL
					3LD9200-5C		1	1 unit	1CL
			45	125	3LD2830-0TK1□ +2)		1	1 unit	1CL
					3LD9200-5C		1	1 unit	1CL
			75	160	3LD2330-0TK1□ +2)		1	1 unit	1CL
					3LD9200-5C		1	1 unit	1CL
			132	250	3LD2430-0TK1□ +2)		1	1 unit	1CL
					3LD9200-5C		1	1 unit	1CL
3 + N	1 NO + 1 NC	7.5	16	d	3LD2030-1TL1□ +2)		1	1 unit	1CL
					3LD9200-5C		1	1 unit	1CL
					3LD2130-0TK1□ +2)		1	1 unit	1CL
					3LD9200-5C		1	1 unit	1CL
					3LD9220-0C		1	1 unit	1CL
					3LD2230-0TK1□ +2)		1	1 unit	1CL
					3LD9200-5C		1	1 unit	1CL
					3LD9220-0C		1	1 unit	1CL
					3LD2530-0TK1□ +2)		1	1 unit	1CL
					3LD9200-5C		1	1 unit	1CL
					3LD9250-0CA		1	1 unit	1CL
					3LD2730-0TK1□ +2)		1	1 unit	1CL
					3LD9200-5C		1	1 unit	1CL
					3LD9280-0C		1	1 unit	1CL
					3LD2830-0TK1□ +2)		1	1 unit	1CL
					3LD9200-5C		1	1 unit	1CL
					3LD9280-0C		1	1 unit	1CL
					3LD2330-0TK1□ +2)		1	1 unit	1CL
					3LD9200-5C		1	1 unit	1CL
					3LD9240-0C		1	1 unit	1CL
					3LD2430-0TK1□ +2)		1	1 unit	1CL
					3LD9200-5C		1	1 unit	1CL
					3LD9240-0C		1	1 unit	1CL

Actuator color

Black

Red/yellow (EMERGENCY-STOP)

1
3

1) 4th contact element as N conductor to be ordered separately, see page 7/39, Accessories for floor mounting.

2) Auxiliary switches 1 NO + 1 NC to be ordered separately, see page 7/39, Accessories.

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD2 main control and EMERGENCY-STOP switches from 16 to 250 A > Molded-plastic enclosures

Selection and ordering data

Number and version of the contacts		Base terminal	Rated data at 50 ... 60 Hz, 380 ... 440 V		SD	Article No. www.siemens.com/product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
Main contact elements	Auxiliary contact elements		P/AC-23A	I _u	d					
			kW	A						
Main control and EMERGENCY-STOP switches • With N and/or PE/ground base terminals • Lockable in 0 position with up to 3 padlocks with a hasp thickness of 4 to 8 mm • Degree of protection IP65 • Rotary operating mechanisms with center-hole mounting • For floor-mounted auxiliary switches • Metric screw connection										
 3LD2164-0TB53	3	--	PE + N	7.5	16	3LD2064-0TB5□		1	1 unit	1CL
			PE + N	9.5	25	3LD2164-0TB5□		1	1 unit	1CL
			PE + N	11.5	32	3LD2264-0TB5□		1	1 unit	1CL
			PE + N	22	63	3LD2565-0TB5□		1	1 unit	1CL
			PE + N	37	100	3LD2766-0TB5□		1	1 unit	1CL
			PE + N	45	125	3LD2866-0TB5□		1	1 unit	1CL
	3 + N	--	PE	7.5	16	3LD2064-1TC5□		1	1 unit	1CL
			PE	9.5	25	3LD2164-1TC5□		1	1 unit	1CL
			PE	11.5	32	3LD2264-1TC5□		1	1 unit	1CL
			PE	22	63	3LD2565-1TC5□		1	1 unit	1CL
			PE + N	37	100	3LD2766-0TB5□ + ¹⁾		1	1 unit	1CL
			PE + N	45	125	3LD2866-0TB5□ + ¹⁾		1	1 unit	1CL
	3	1 NO + 1 NC	N	7.5	16	3LD2064-1GP5□		1	1 unit	1CL
			N	9.5	25	3LD2164-1GP5□		1	1 unit	1CL
			N	11.5	32	3LD2264-1GP5□		1	1 unit	1CL
			N	22	63	3LD2565-1GP5□		1	1 unit	1CL
			N	37	100	3LD2766-1GP5□		1	1 unit	1CL
			N	45	125	3LD2866-1GP5□		1	1 unit	1CL
	3 + N	1 NO + 1 NC	PE	7.5	16	3LD2064-1TC5□ + ²⁾		1	1 unit	1CL
						3LD9200-5C		1	1 unit	1CL
			PE	9.5	25	3LD2164-1TC5□ + ²⁾		1	1 unit	1CL
						3LD9200-5C		1	1 unit	1CL
			PE	11.5	32	3LD2264-1TC5□ + ²⁾		1	1 unit	1CL
						3LD9200-5C		1	1 unit	1CL
PE			22	63	3LD2565-1TC5□ + ²⁾		1	1 unit	1CL	
					3LD9200-5C		1	1 unit	1CL	
N			37	100	3LD2766-1GP5□ + ¹⁾		1	1 unit	1CL	
					3LD9280-0C		1	1 unit	1CL	
N			45	125	3LD2866-1GP5□ + ¹⁾		1	1 unit	1CL	
					3LD9280-0C		1	1 unit	1CL	

Actuator color

Black

Red/yellow (EMERGENCY-STOP)

1

3

Actuator color

Black

Red/yellow (EMERGENCY-STOP)

1

3

¹⁾ 4th contact element as N conductor to be ordered separately, see page 7/39, Accessories for floor mounting

²⁾ Auxiliary switches 1 NO + 1 NC to be ordered separately, see page 7/39, Accessories

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD2 main control and EMERGENCY-STOP switches from 16 to 250 A > Molded-plastic enclosures

Number and version of the contacts		Base terminal	Rated data at 50 ... 60 Hz, 380 ... 440 V			SD	Article No. www.siemens.com/ product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
Main contact elements	Auxiliary contact elements		P/AC-3	P/AC-23A	I _u						
			kW	kW	A						
Main control and EMERGENCY-STOP switches with rotary operating mechanism (6-pole) • With N and/or PE/ground base terminals • Degree of protection IP65 • Metric screw connection											
	6	--	PE + N	7.5	9.5	25	3LD2165-3VB5□		1	1 unit	1CL
			PE + N	9.5	11.5	32	3LD2265-3VB5□		1	1 unit	1CL
			PE + N	18.5	22.0	63	3LD2566-3VB5□		1	1 unit	1CL
	6	1 NO + 1 NC	N	7.5	9.5	25	3LD2165-4VD5□		1	1 unit	1CL
			N	9.5	11.5	32	3LD2265-4VD5□		1	1 unit	1CL
			PE + N	18.5	22.0	63	3LD2566-4VD5□		1	1 unit	1CL

3LD2165-3VB53

3LD2165-3VB53

Actuator color

Black
Red/yellow (EMERGENCY-STOP)

1
3

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD2 main control and EMERGENCY-STOP switches from 16 to 250 A > DC applications

Selection and ordering data

Mains voltage	Rated current I_e at 800 V DC		SD	Article No. www.siemens.com/ product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
Max. V DC	DC-21A A	DC-22A A	d					

DC isolators in molded-plastic enclosure

- Molded-plastic enclosure IP65
- Metric screw connection
- (B x H x D) 146 x 199 x 136 mm
- Conductor cross-sections:
 - Solid and stranded 1.5 ... 16 mm²
 - Finely stranded with end sleeve max. 10 mm²
- Lockable



3LD2265-8VQ5-0AF6

800	32	16		3LD2265-8VQ5-0AF6		1	1 unit	1CL
-----	----	----	--	--------------------------	--	---	--------	-----

Actuator color

Black
Red/yellow (EMERGENCY-STOP)

1
3

Mains voltage	Rated current I_e at 800 V DC		SD	Article No. www.siemens.com/ product?Article No.	Price per PU	PU (UNIT, SET, M)	PS	PG
Max. V DC	DC-21A A	DC-22A A	d					

DC isolators for distribution board mounting

- Conductor cross-sections:
 - Solid and stranded 1.5 ... 16 mm²
 - Finely stranded with end sleeve max. 10 mm²
- Actuator color: Black



3LD2230-8VQ11-0AF6

800	32	16		3LD2230-8VQ11-0AF6		1	1 unit	1CL
-----	----	----	--	---------------------------	--	---	--------	-----

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD2 main control and EMERGENCY-STOP switches from 16 to 250 A > Accessories

Selection and ordering data


Version		SD	3LD20	PU (UNIT, SET, M)	PS	PG
		Article No. www.siemens.com/ product?Article No.		Price per PU		
d						
For front mounting						
	N or PE terminals Through-type		3LD9200-2B	1	1 unit	1CL
	Auxiliary switches For mounting on the left and/or right, lagging switch-on, leading switch-off • 1 NO + 1 NC For mounting on the left and/or right, lagging switch-on, with gold-plated contacts for requesting electronic information, leading switch-off • 1 NO + 1 NC		3LD9200-5B 3LD9200-5BF	1 1	1 unit 1 unit	1CL 1CL
For floor mounting, distribution board mounting or molded-plastic enclosures						
	N or PE terminals Through-type		3LD9200-2C	1	1 unit	1CL
 	Auxiliary switches For mounting on the left and/or right, lagging switch-on, leading switch-off • 1 NO + 1 NC • 2 NO For mounting on the left and/or right, lagging switch-on, with gold-plated contacts for requesting electronic information, leading switch-off • 1 NO + 1 NC		3LD9200-5C 3LD9200-6C 3LD9200-5CF	1 1	1 unit 1 unit	1CL 1CL
For front and floor mounting						
	Rotary operating mechanisms Lockable in 0 position with up to 3 padlocks • For four-hole mounting, including seal - Black - Red/yellow • For center-hole mounting, including seal and nut - Black - Red/yellow		3LD9224-1B 3LD9224-3B 3LD9224-1D 3LD9224-3D	1 1 1	1 unit 1 unit 1 unit	1CL 1CL 1CL
	Mounting tools For center-hole mounting with nut		3LD9256-0A	1	5 units	1CL
	Switching shafts 6 x 6 mm Length 300 mm Length 600 mm		3LD9205-0C 3LD9205-2C	1 1	5 units 5 units	1CL 1CL
	Inscription labels With English/German inscription (MAIN SWITCH/HAUPTSCHALTER) Without inscription		3LD9286-1A 3LD9286-4A	1 1	10 units 10 units	1CL 1CL
	Terminal covers as additional touch protection (also for distribution board mounting) Can be snapped on at top and bottom • 1-pole • 4-pole		3LD9201-2A 3LD9201-1A	100 1	4 units 4 units	1CL 1CL

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD2 main control and EMERGENCY-STOP switches from 16 to 250 A > Accessories


Version		SD	3LD21 and 3LD22	PU (UNIT, SET, M)	PS	PG
			Article No. www.siemens.com/ product?Article No.	Price per PU		
For front mounting						
	4th contact element (N conductor) Leading switch-on, lagging switch-off		3LD9220-0B	1	1 unit	1CL
	N or PE terminals Through-type		3LD9220-2B	1	1 unit	1CL
	Auxiliary switches For mounting on the left and/or right, lagging switch-on, leading switch-off • 1 NO + 1 NC For mounting on the left and/or right, lagging switch-on, leading switch-off, with gold-plated contacts for requesting electronic information • 1 NO + 1 NC		3LD9200-5B	1	1 unit	1CL
			3LD9200-5BF	1	1 unit	1CL
For floor mounting, distribution board mounting or molded-plastic enclosures						
	4th contact element (N conductor) Leading switch-on, lagging switch-off		3LD9220-0C	1	1 unit	1CL
	N or PE terminals Through-type		3LD9220-2C	1	1 unit	1CL
	Auxiliary switches For mounting on the left and/or right, lagging switch-on, leading switch-off • 1 NO + 1 NC • 2 NO For mounting on the left and/or right, lagging switch-on, leading switch-off, with gold-plated contacts for requesting electronic information • 1 NO + 1 NC		3LD9200-5C 3LD9200-6C	1 1	1 unit 1 unit	1CL 1CL
			3LD9200-5CF	1	1 unit	1CL
For front and floor mounting						
	Rotary operating mechanisms Lockable in 0 position with up to 3 padlocks • For four-hole mounting including seal - Black - Red/yellow		3LD9224-1B 3LD9224-3B	1 1	1 unit 1 unit	1CL 1CL
			3LD9224-1D 3LD9224-3D	1 1	1 unit 1 unit	1CL 1CL
						
	Mounting tools For center-hole mounting with nut		3LD9256-0A	1	5 units	1CL
	Switching shafts 6 x 6 mm Length 300 mm Length 600 mm		3LD9205-0C 3LD9205-2C	1 1	5 units 5 units	1CL 1CL
	Inscription labels With English/German inscription (MAIN SWITCH/HAUPTSCHALTER) Without inscription		3LD9286-1A 3LD9286-4A	1 1	10 units 10 units	1CL 1CL
						
	Terminal covers as additional touch protection (also for distribution board mounting) Can be snapped on at top and bottom • 1-pole • 3-pole		3LD9221-2A 3LD9221-0A	100 1	4 units 4 units	1CL 1CL

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD2 main control and EMERGENCY-STOP switches from 16 to 250 A > Accessories

Version	SD	3LD25	PU (UNIT, SET, M)	PS	PG
	d	Article No. www.siemens.com/ product?Article No.	Price per PU		
For front mounting					
 3LD9250-0BA (left) 3LD9250-2BA (right)	4th contact element (N conductor) Leading switch-on, lagging switch-off		3LD9250-0BA	1	1 unit 1CL
	N or PE terminals Through-type		3LD9250-2BA	1	1 unit 1CL
	Auxiliary switches For mounting on the left and/or right, lagging switch-on, leading switch-off • 1 NO + 1 NC For mounting on the left and/or right, lagging switch-on, leading switch-off, with gold-plated contacts for requesting electronic information • 1 NO + 1 NC		3LD9200-5B 3LD9200-5BF	1 1	1 unit 1CL 1 unit 1CL
For floor mounting, distribution board mounting or molded-plastic enclosures					
 3LD9250-0CA (left) 3LD9250-2CA (right)	4th contact element (N conductor) Leading switch-on, lagging switch-off		3LD9250-0CA	1	1 unit 1CL
	N or PE terminals Through-type		3LD9250-2CA	1	1 unit 1CL
	Auxiliary switches For mounting on the left and/or right, lagging switch-on, leading switch-off • 1 NO + 1 NC • 2 NO For mounting on the left and/or right, lagging switch-on, leading switch-off, with gold-plated contacts for requesting electronic information • 1 NO + 1 NC		3LD9200-5C 3LD9200-6C 3LD9200-5CF	1 1 1	1 unit 1CL 1 unit 1CL 1 unit 1CL
For front and floor mounting					
 3LD9284-1B 3LD9284-3D	Rotary operating mechanisms Lockable in 0 position with up to 3 padlocks • For four-hole mounting, including seal - Black - Red/yellow • For center-hole mounting, including seal and nut - Black - Red/yellow		3LD9284-1B 3LD9284-3B 3LD9284-1D 3LD9284-3D	1 1 1 1	1 unit 1CL 1 unit 1CL 1 unit 1CL 1 unit 1CL
	Mounting tools For center-hole mounting with nut		3LD9256-0A	1	5 units 1CL
	Switching shafts 6 x 6 mm Length 300 mm Length 600 mm		3LD9205-0C 3LD9205-2C	1 1	5 units 1CL 5 units 1CL
 3LD9286-1A	Inscription labels With English/German inscription (MAIN SWITCH/HAUPTSCHALTER) Without inscription		3LD9286-1A 3LD9286-4A	1 1	10 units 1CL 10 units 1CL
	Terminal covers as additional touch protection (also for distribution board mounting) Can be snapped on at top and bottom • 1-pole • 3-pole		3LD9251-2A 3LD9251-0A	100 1	4 units 1CL 4 units 1CL
 3LD9251-2A (left) 3LD9251-0A (right)					

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD2 main control and EMERGENCY-STOP switches from 16 to 250 A > Accessories

Version	SD	3LD27 and 3LD28	PU (UNIT, SET, M)	PS	PG
	d	Article No. www.siemens.com/ product?Article No.	Price per PU		
For front mounting					
 3LD9280-0B (left) 3LD9280-2B (right)	4 th contact element (N conductor) Leading switch-on, lagging switch-off		3LD9280-0B	1	1 unit 1CL
	N or PE terminals Through-type		3LD9280-2B	1	1 unit 1CL
 3LD9200-5B	Auxiliary switches For mounting on the left and/or right, lagging switch-on, leading switch-off		3LD9200-5B	1	1 unit 1CL
	For mounting on the left and/or right, lagging switch-on, leading switch-off, with gold-plated contacts for requesting electronic information		3LD9200-5BF	1	1 unit 1CL
For floor mounting, distribution board mounting or molded-plastic enclosures					
 3LD9280-0C (left) 3LD9280-2C (right)	4 th contact element (N conductor) Leading switch-on, lagging switch-off		3LD9280-0C	1	1 unit 1CL
	N or PE terminals Through-type		3LD9280-2C	1	1 unit 1CL
 3LD9200-5C (left) 3LD9200-6C (right)	Auxiliary switches For mounting on the left and/or right, lagging switch-on, leading switch-off		3LD9200-5C	1	1 unit 1CL
	For mounting on the left and/or right, lagging switch-on, leading switch-off, with gold-plated contacts for requesting electronic information		3LD9200-6C	1	1 unit 1CL
			3LD9200-5CF	1	1 unit 1CL
For front and floor mounting					
 3LD9284-1B	Rotary operating mechanisms Lockable in 0 position with up to 3 padlocks		3LD9284-1B	1	1 unit 1CL
	For four-hole mounting, including seal		3LD9284-3B	1	1 unit 1CL
 3LD9284-3D	For center-hole mounting, including seal and nut		3LD9284-1D	1	1 unit 1CL
			3LD9284-3D	1	1 unit 1CL
		Switching shafts 6 x 6 mm Length 300 mm	3LD9205-0C	1	5 units 1CL
		Length 600 mm	3LD9205-2C	1	5 units 1CL
 3LD9286-1A	Inscription labels With English/German inscription (MAIN SWITCH/HAUPTSCHALTER)		3LD9286-1A	1	10 units 1CL
	Without inscription		3LD9286-4A	1	10 units 1CL
 3LD9281-2A	Terminal covers as additional touch protection (also for distribution board mounting) Can be snapped on at top and bottom		3LD9281-2A	1	4 units 1CL
	1-pole (1 pack = 4 units)				

Switch Disconnectors

Fuseless Switch Disconnectors

3LD Main Control and EMERGENCY-STOP Switches from 16 to 250 A

3LD2 main control and EMERGENCY-STOP switches from 16 to 250 A > Accessories

Version		SD	3LD23 and 3LD24	PU (UNIT, SET, M)	PS	PG
		d	Article No. www.siemens.com/ product?Article No.	Price per PU		
For front mounting						
	4 th contact element (N conductor) Leading switch-on, lagging switch-off		3LD9240-0B	1	1 unit	1CL
	N or PE terminals Through-type		3LD9240-2B	1	1 unit	1CL
	Auxiliary switches For mounting on the left and/or right, lagging switch-on, leading switch-off		3LD9200-5B	1	1 unit	1CL
	• 1 NO + 1 NC • For mounting on the left and/or right, lagging switch-on, leading switch-off, with gold-plated contacts for requesting electronic information • 1 NO + 1 NC		3LD9200-5BF	1	1 unit	1CL
For floor and distribution board mounting						
	Coupling piece Without ON-lock		3LD9242-4F	1	5 units	1CL
	4 th contact element (N conductor) Leading switch-on, lagging switch-off		3LD9240-0C	1	1 unit	1CL
	N or PE terminals Through-type		3LD9240-2C	1	1 unit	1CL
	Auxiliary switches For mounting on the left and/or right, lagging switch-on, leading switch-off		3LD9200-5C	1	1 unit	1CL
	• 1 NO + 1 NC • 2 NO For mounting on the left and/or right, lagging switch-on, leading switch-off, with gold-plated contacts for requesting electronic information • 1 NO + 1 NC		3LD9200-6C	1	1 unit	1CL
			3LD9200-5CF	1	1 unit	1CL
For front and floor mounting						
	Knob-operated mechanism (also for distribution board mounting) Lockable in 0 position with up to 3 padlocks		3LD9243-1B	1	1 unit	1CL
	• For four-hole mounting, including seal - Black - Red/yellow		3LD9243-3B	1	1 unit	1CL
	Switching shafts 8 x 8 mm Length 300 mm		3LD9245-0C	1	5 units	1CL
	Length 600 mm		3LD9245-2C	1	5 units	1CL
	Terminal covers as additional touch protection (also for distribution board mounting) Can be snapped on at top and bottom		3LD9241-2A	1	4 units	1CL
	• 1-pole					

Appendix

Conditions of sale and delivery

1. General standards

By using this catalog you can acquire hardware and software products described therein from Siemens AG subject to these conditions of sale and delivery (hereinafter: CSD). Please note: the scope, the quality and the conditions for supplies and services, including software products, by any Siemens group or Regional Company having a registered office outside of Germany, shall be subject exclusively to the General Terms and Conditions of the respective Siemens entity. These CSD apply exclusively for orders placed with Siemens AG, Germany.

1.1 For customers with a seat or registered office in Germany

For customers with a seat or registered office in Germany, the following shall be subordinate to these CSD

- the "General Terms of Payment"¹⁾ and
- for software products, the "General License Conditions for Software Products for Automation and Drives for Customers with a Seat or Registered Office in Germany"¹⁾ and
- the "General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry"¹⁾ for other deliveries and services.

1.2 For customers with a seat or registered office outside of Germany

For customers with a seat or registered office outside of Germany, the following shall be subordinate to these CSD

- the "General Terms of Payment"¹⁾ and
- for software products, the "General License Conditions for Software Products for Automation and Drives for Customers with a Seat or Registered Office outside of Germany"¹⁾ and
- the "General Conditions for Supplies of Siemens Industry for Customers with a Seat or Registered Office outside of Germany"¹⁾ for other deliveries and services.

2. Prices

The prices are in € (Euro) ex works, excluding packaging.

The sales tax (value added tax) is not included in the prices. It shall be debited separately at the respective rate according to the applicable legal regulations.

Prices are subject to change without prior notice. We will debit the prices valid at the time of delivery.

To compensate fluctuating prices of raw materials (for example silver, copper, aluminum, lead, gold, dysprosium and neodymium), surcharges are calculated on a daily basis for products containing these raw materials using the metal factor. A surcharge for the particular raw material is added to the price of a product if the basic quotations for this raw material are exceeded.

Each product's metal factor dictates for which raw materials the metal surcharges are calculated, from which quotation and with which calculation method (weight or percentage method).

An exact explanation of the metal factor can be found at www.siemens.com/automation/salesmaterial-as/catalog/en/terms_of_trade_en.pdf

The surcharge will be calculated (except in the case of dysprosium and neodymium) on the basis of the official price on the day prior to receipt of the order or prior to the release order for calculation of the surcharge.

In the event of placement of an order, the relevant three-month average price from the quarter prior to order receipt or the release order shall be used with a one-month buffer to calculate the dysprosium and neodymium surcharge ("rare earths") (you will find details in the aforementioned explanation of the metal factor).

3. Additional terms and conditions

All dimensions are in mm. In Germany, according to the German law on units in metrology, data in inches only apply to devices for export.

Illustrations are not binding.

Insofar as there are no remarks on the corresponding pages of this catalog - especially with regard to data, dimensions and weights given - these are subject to change without prior notice.

4. Export regulations

We shall not be obligated to fulfill this agreement if such fulfillment is prevented by any impediments arising out of national or international foreign trade or customs requirements or any embargoes or other sanctions.

Export of the products listed in this catalog may be subject to authorization. In delivery information, we label authorization obligations according to German, European and US export lists. Goods labeled with an "AL" not equal to "N" are subject to European or German export authorization when being exported out of the EU. Goods labeled with "ECCN" not equal to "N" are subject to a US re-export authorization.

Please note that you can also preview the export designations in the respective product description via our "Industry Mall" online catalog system. The deciding factors, however, are the AL or ECCN export designations indicated on order confirmations, delivery notes and invoices.

Even if goods are not labeled, or labeled "AL:N" or "ECCN:N", they may still be subject to export authorization based on the final destination and end use of the goods.

If you transfer goods (hardware and/or software and/or technology as well as corresponding documentation, regardless of the mode of provision) delivered by us or works and services (including all kinds of technical support) performed by us to a third party worldwide, you shall comply with all applicable national and international (re-) export control regulations.

If required to conduct export control checks, you, at our request, shall promptly provide us with all information pertaining to particular end customers, destination and intended use of goods, works and services provided by us, as well as any relevant export control restrictions.

The products listed in this catalog may be subject to European/German and/or US export regulations. Therefore, any export requiring a license is subject to approval by the competent authorities.

Errors excepted and subject to change without prior notice.

¹⁾ You can download the text of the Siemens AG terms and conditions of trade at

www.siemens.com/automation/salesmaterial-as/catalog/en/terms_of_trade_en.pdf

Further information can be obtained from our branch offices listed at www.siemens.com/lowvoltage/contact

Interactive Catalog on DVD		<i>Catalog</i>
Products for Automation and Drives	CA 01	
Building Control		
GAMMA Building Control	ET G1	
Drive Systems		
SINAMICS G130 Drive Converter Chassis Units	D 11	
SINAMICS G150 Drive Converter Cabinet Units		
SINAMICS GM150, SINAMICS SM150 Medium-Voltage Converters	D 12	
SINAMICS PERFECT HARMONY GH180 Medium-Voltage Air-Cooled Drives (Germany Edition)	D 15.1	
SINAMICS G180 Converters – Compact Units, Cabinet Systems, Cabinet Units Air-Cooled and Liquid-Cooled	D 18.1	
SINAMICS S120 Chassis Format Units and Cabinet Modules	D 21.3	
SINAMICS S150 Converter Cabinet Units		
SINAMICS S120 and SIMOTICS	D 21.4	
SINAMICS DCM DC Converter, Control Module	D 23.1	
SINAMICS Inverters for Single-Axis Drives · Built-In Units	D 31.1	
SINAMICS Inverters for Single-Axis Drives · Distributed Inverters	D 31.2	
<i>Digital: SINAMICS G120P and SINAMICS G120P Cabinet pump, fan, compressor converters</i>	D 35	
LOHER VARIO High Voltage Motors Flameproof, Type Series 1PS4, 1PS5, 1MV4 and 1MV5 Frame Size 355 to 1000, Power Range 80 to 7100 kW	D 83.2	
Three-Phase Induction Motors SIMOTICS HV, SIMOTICS TN	D 84.1	
High Voltage Three-phase Induction Motors SIMOTICS HV Series A-compact PLUS	D 84.9	
<i>Digital: Modular Industrial Generators SIGENTICS M</i>	D 85.1	
Three-Phase Induction Motors SIMOTICS HV, Series H-compact	D 86.1	
Synchronous Motors with Permanent-Magnet Technology, HT-direct	D 86.2	
DC Motors	DA 12	
SIMOREG DC MASTER 6RA70 Digital Chassis Converters	DA 21.1	
SIMOREG K 6RA22 Analog Chassis Converters	DA 21.2	
<i>Digital: SIMOREG DC MASTER 6RM70 Digital Converter Cabinet Units</i>	DA 22	
SIMOVERT PM Modular Converter Systems	DA 45	
MICROMASTER 420/430/440 Inverters	DA 51.2	
MICROMASTER 411/COMBIMASTER 411	DA 51.3	
<u>Low-Voltage Three-Phase-Motors</u>		
SIMOTOCS S-1FG1 Servo geared motors	D 41	
SIMOTICS Low-Voltage Motors	D 81.1	
SIMOTICS FD Low-Voltage Motors	D 81.8	
LOHER Low-Voltage Motors	D 83.1	
<i>Digital: MOTOX Geared Motors</i>	D 87.1	
SIMOGEAR Geared Motors	MD 50.1	
SIMOGEAR Electric-monorail geared motors Light-load and heavy-load applications	MD 50.8	
SIMOGEAR Gearboxes with adapter	MD 50.11	
<u>Mechanical Driving Machines</u>		
FLENDER Standard Couplings	MD 10.1	
FLENDER High Performance Couplings	MD 10.2	
FLENDER Backlash-free Couplings	MD 10.3	
FLENDER SIP Standard industrial planetary gear units	MD 31.1	
Process Instrumentation and Analytics		<i>Catalog</i>
<i>Digital: Field Instruments for Process Automation</i>	FI 01	
<i>Digital: Display Recorders SIREC D</i>	MP 20	
<i>Digital: SIPART Controllers and Software</i>	MP 31	
Products for Weighing Technology	WT 10	
<i>Digital: Process Analytical Instruments</i>	AP 01	
<i>Digital: Process Analytics, Components for Continu- ous Emission Monitoring</i>	AP 11	
Low-Voltage Power Distribution and Electrical Installation Technology		
SENTRON · SIVACON · ALPHA	LV 10	
Protection, Switching, Measuring and Monitoring Devices, Switchboards and Distribution Systems		
Standards-Compliant Components for Photovoltaic Plants	LV 11	
Electrical Components for the Railway Industry	LV 12	
Power Monitoring Made Simple	LV 14	
Components for Industrial Control Panels according to UL Standards	LV 16	
3WT Air Circuit Breakers up to 4000 A	LV 35	
3VT Molded Case Circuit Breakers up to 1600 A	LV 36	
<i>Digital: SIVACON System Cubicles, System Lighting and System Air-Conditioning</i>	LV 50	
<i>Digital: ALPHA Distribution Systems</i>	LV 51	
ALPHA FIX Terminal Blocks	LV 52	
SIVACON S4 Power Distribution Boards	LV 56	
SIVACON 8PS Busbar Trunking Systems	LV 70	
<i>Digital: DELTA Switches and Socket Outlets</i>	ET D1	
Vacuum Switching Technology and Components for Medium Voltage	HG 11.01	
Motion Control		
SINUMERIK 840 Equipment for Machine Tools	NC 62	
SINUMERIK 808 Equipment for Machine Tools	NC 81.1	
SINUMERIK 828 Equipment for Machine Tools	NC 82	
SIMOTION Equipment for Production Machines	PM 21	
<i>Digital: Drive and Control Components for Cranes</i>	CR 1	
Power Supply		
SITOP Power supply	KT 10.1	
Safety Integrated		
Safety Technology for Factory Automation	SI 10	
SIMATIC HMI / PC-based Automation		
Human Machine Interface Systems/ PC-based Automation	ST 80/ ST PC	
SIMATIC Ident		
Industrial Identification Systems	ID 10	
SIMATIC Industrial Automation Systems		
Products for Totally Integrated Automation	ST 70	
SIMATIC PCS 7 Process Control System System components	ST PCS 7	
SIMATIC PCS 7 Process Control System Technology components	ST PCS 7 T	
Add-ons for the SIMATIC PCS 7 Process Control System	ST PCS 7 AO	
SIMATIC S7-400 advanced controller	ST 400	
SIMATIC NET		
Industrial Communication	IK PI	
SIRIUS Industrial Controls		
SIRIUS Industrial Controls	IC 10	

*Digital: These catalogs are only available as a PDF.***Siemens Industry Online Support**Digital versions of the catalogs are available on the Internet at:
www.siemens.com/lowvoltage/catalogs

Get more information

siemens.com/lowvoltage

Siemens AG
Energy Management
Low Voltage & Products
Postfach 10 09 53
93009 Regensburg
Germany

© Siemens AG 2017
Subject to change without prior notice
PDF (E86060-K8280-E343-A1-7600)
KG 1117 46 En
Produced in Germany

The information provided in this catalog contains merely general descriptions or characteristics of performance which in case of actual use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract. Availability and technical specifications are subject to change without notice.

All product designations may be trademarks or product names of Siemens AG or supplier companies whose use by third parties for their own purposes could violate the rights of the owners.

Security information

Siemens provides products and solutions with industrial security functions that support the secure operation of plants, systems, machines and networks.

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial security concept. Siemens' products and solutions only form one element of such a concept.

Customer is responsible to prevent unauthorized access to its plants, systems, machines and networks. Systems, machines and components should only be connected to the enterprise network or the internet if and to the extent necessary and with appropriate security measures (e.g. use of firewalls and network segmentation) in place.

Additionally, Siemens' guidance on appropriate security measures should be taken into account. For more information about industrial security, please visit **<http://www.siemens.com/industrialsecurity>**.

Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends to apply product updates as soon as available and to always use the latest product versions. Use of product versions that are no longer supported, and failure to apply latest updates may increase customer's exposure to cyber threats.

To stay informed about product updates, subscribe to the Siemens Industrial Security RSS Feed under **<http://www.siemens.com/industrialsecurity>**.