



Figure similar

temperature monitoring relay Thermocouple type K, overshoot 2 threshold values, width 22.5 mm 0 °C to 600 °C 24 - 240 V AC/DC 1 NO + 1 CO, Load and quiescent current screw terminal !!!phased-out product!!! the preferred successor is 3RS2600-2BW30

product brand name	SIRIUS
product designation	Temperature monitoring relay
design of the product	Overshoot, 2 threshold values
product type designation	3RS11
<b>General technical data</b>	
reference code according to IEC 81346-2	K
measurable temperature	
• initial value	0 °C
• full-scale value	600 °C
Substance Prohibition (Date)	05/01/2012
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8
Weight	0.16 kg
product function	
• error memory	No
• external reset	No
design of the sensor connectable	type K (thermocouple)
<b>Control circuit/ Control</b>	
type of voltage	AC/DC
control supply voltage 1 at AC	
• at 50 Hz	24 ... 240 V
• at 60 Hz	24 ... 240 V
control supply voltage 1 at DC	24 ... 240 V
supply voltage frequency for auxiliary and control circuit	50 ... 60 Hz
number of measuring circuits	1
<b>Auxiliary circuit</b>	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	1
number of CO contacts for auxiliary contacts	1
<b>Connections/ Terminals</b>	
type of electrical connection for auxiliary and control circuit	screw-type terminals
type of electrical connection plug-in socket	Yes
<b>Installation/ mounting/ dimensions</b>	
fastening method	screw and snap-on mounting onto 35 mm DIN rail
height	102 mm
width	22.5 mm
depth	91 mm
<b>Ambient conditions</b>	
ambient temperature during operation	-25 ... +60 °C

Approvals Certificates

General Product Approval



[Confirmation](#)



EMV	Test Certificates	other	Environment
<a href="#">KC</a>	<a href="#">Type Test Certificates/Test Report</a>	<a href="#">Confirmation</a>	<a href="#">Environmental Confirmations</a>

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RS1121-1DW30>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RS1121-1DW30>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RS1121-1DW30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RS1121-1DW30&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RS1121-1DW30&lang=en)

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3RS1121-1DW30/manual>

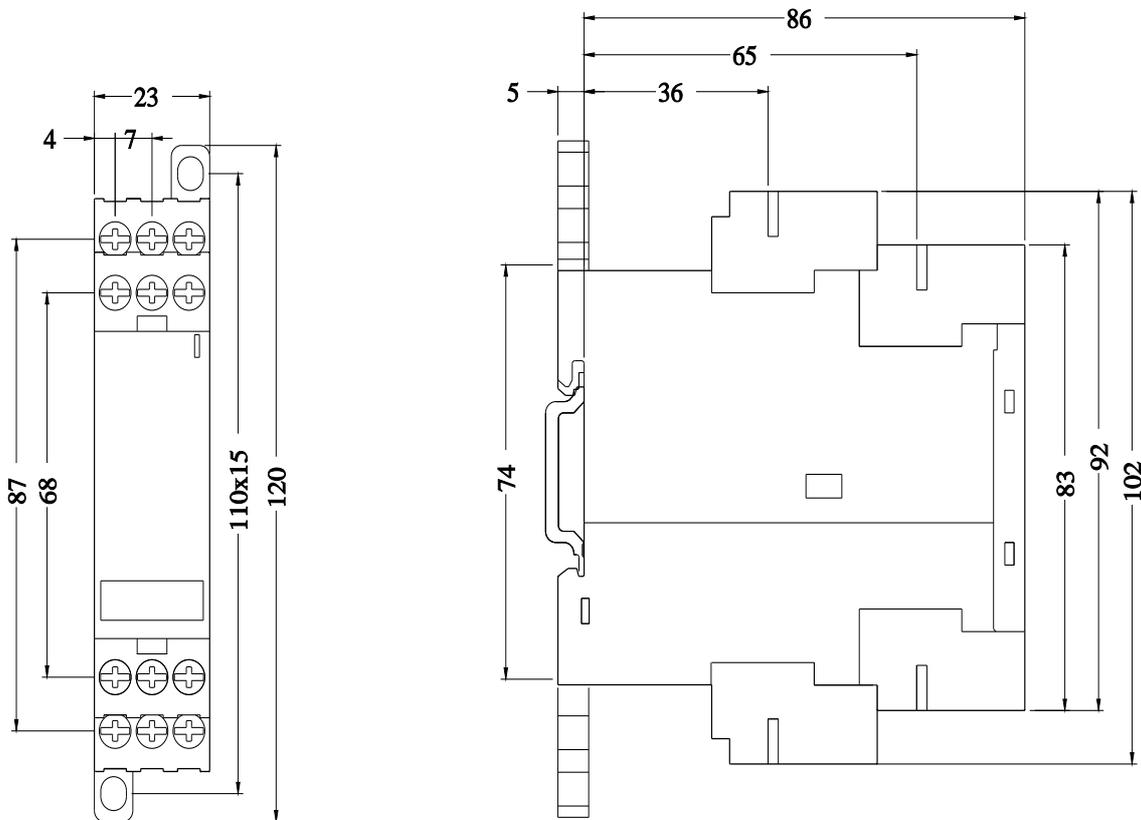

last modified:

3/11/2024