



temperature monitoring relay for IO-Link Pt100/1000 KTY83/84, NTC 1 to 3 sensors, 2 limit values -50 °C to 750 °C 3 x 1 CO, width 45 mm screw terminal
!!!phased-out product!!! the preferred successor is 3RS2800-1BA40+3RS2900-1AA30

product brand name	SIRIUS
product designation	Temperature monitoring relay
design of the product	2 threshold values, digitally adjustable
product type designation	3RS14
General technical data	
power loss [W] maximum	4 W
power loss [V·A] maximum	7 VA
reference code according to IEC 81346-2	K
measurable temperature	
• initial value	-50 °C
• full-scale value	750 °C
Substance Prohibitance (Date)	05/01/2012
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one - 71868-10-5
Weight	0.333 kg
product function	
• error memory	Yes
• external reset	Yes
design of the sensor connectable	PT100/1000, KTY83/84, NTC (resistance sensors)
measurable temperature with KTY-sensor maximum	200 °C
sensor current with KTY-sensor	0.3 mA
Control circuit/ Control	
type of voltage	DC
control supply voltage 1 at DC rated value	24 V
control supply voltage 1 at DC	18 ... 30 V
number of measuring circuits	3
Communication/ Protocol	
protocol is supported IO-Link protocol	Yes
IO-Link transfer rate	COM2 (38,4 kBaud)
point-to-point cycle time between master and IO-Link device minimum	10 ms
type of voltage supply via input/output link master	Yes
data volume	
• of the address range of the inputs with cyclical transfer total	4 byte
• of the address range of the outputs with cyclical transfer total	2 byte
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	3

Connections/ Terminals		
type of electrical connection for auxiliary and control circuit	screw-type terminals	
Installation/ mounting/ dimensions		
fastening method	screw and snap-on mounting onto 35 mm DIN rail	
height	106 mm	
width	45 mm	
depth	91 mm	
Ambient conditions		
ambient temperature during operation	-25 ... +60 °C	
Approvals Certificates		
General Product Approval	EMV	Test Certificates
Confirmation  CCC	 UL	
	KC	Type Test Certificates/Test Report
other	Environment	

[Confirmation](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RS1441-1HB50>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RS1441-1HB50>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)




<https://support.industry.siemens.com/cs/ww/en/ps/3RS1441-1HB50>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RS1441-1HB50&lang=en

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3RS1441-1HB50/manual>

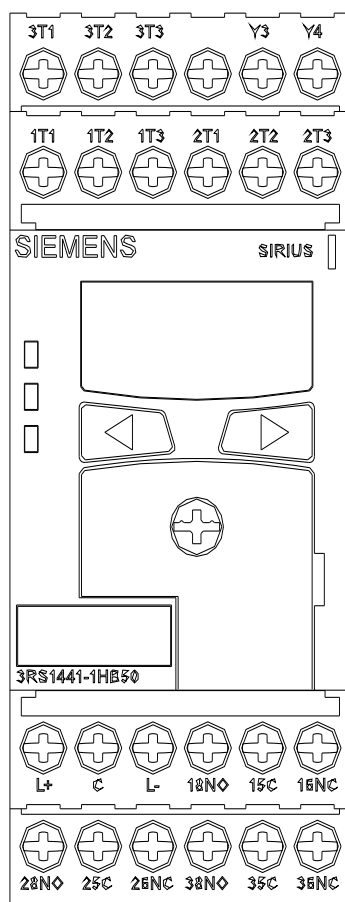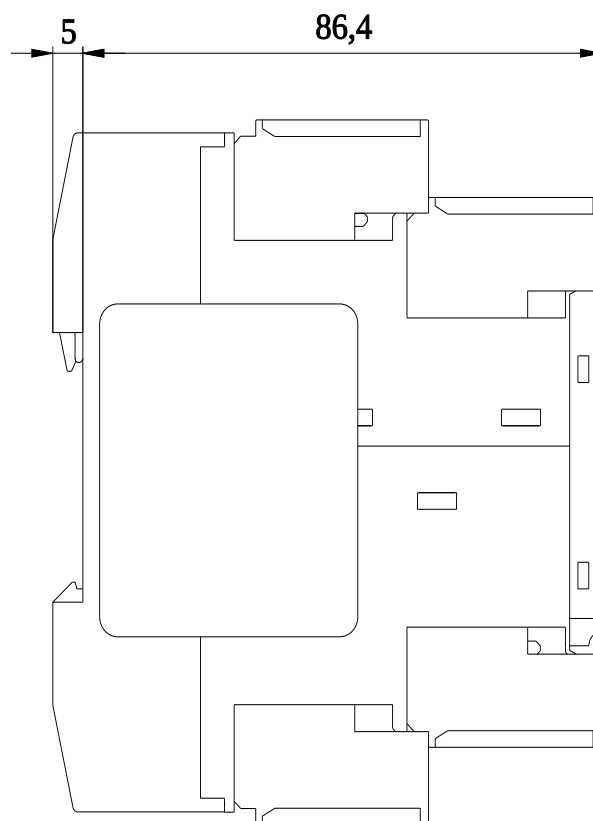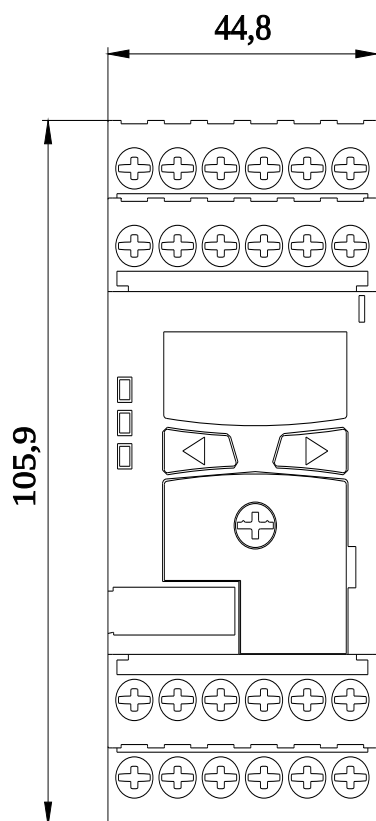

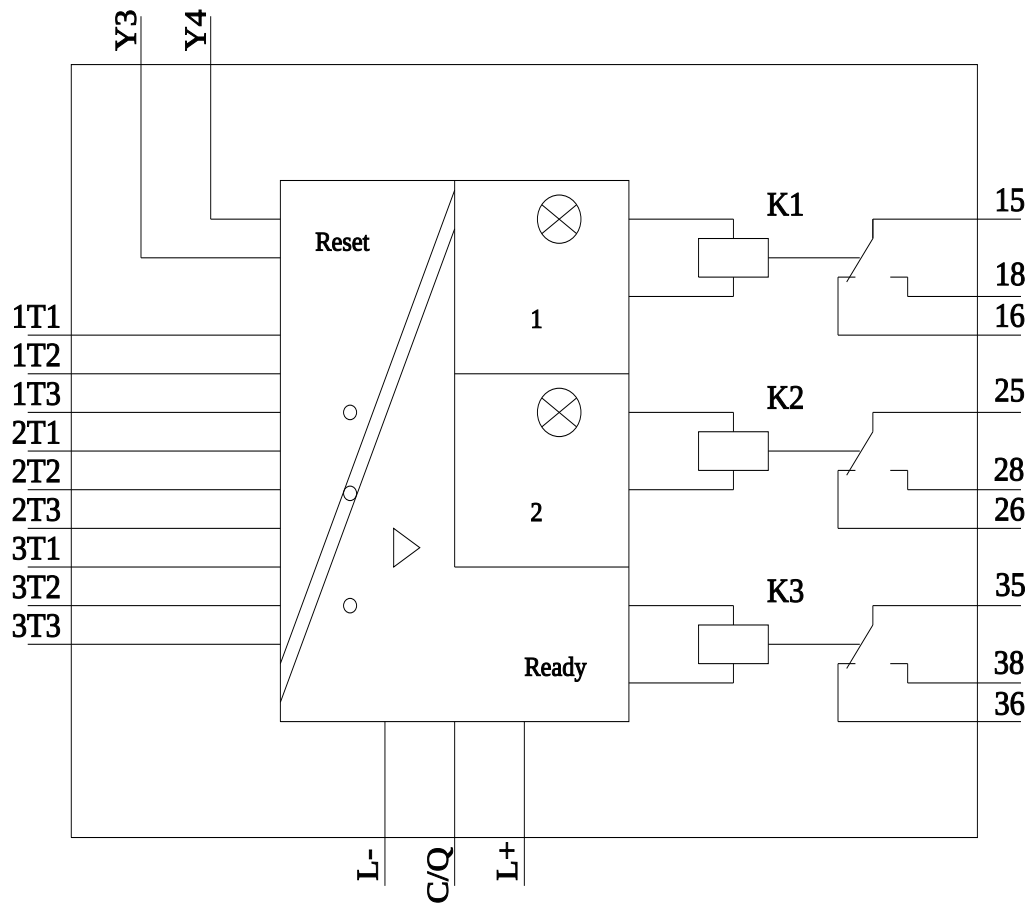

last modified:

3/11/2024 [↗](#)