

Power contactor, AC-3 65 A, 30 kW / 400 V 1 NO + 1 NC, 20-33 V
AC/DC 3-pole, size S2 Spring-type terminals



| | |
|--------------------------|-----------------|
| Product brand name | SIRIUS |
| Product designation | Power contactor |
| Product type designation | 3RT2 |

| General technical data | |
|---|---------------------------|
| Size of contactor | S2 |
| Product extension | |
| <ul style="list-style-type: none"> function module for communication | No |
| <ul style="list-style-type: none"> Auxiliary switch | Yes |
| Surge voltage resistance | |
| <ul style="list-style-type: none"> of main circuit rated value | 6 kV |
| <ul style="list-style-type: none"> of auxiliary circuit rated value | 6 kV |
| maximum permissible voltage for safe isolation | |
| <ul style="list-style-type: none"> between coil and main contacts acc. to EN 60947-1 | 400 V |
| Protection class IP | |
| <ul style="list-style-type: none"> on the front | IP20 |
| <ul style="list-style-type: none"> of the terminal | IP00 |
| Shock resistance at rectangular impulse | |
| <ul style="list-style-type: none"> at AC | 7.7g / 5 ms, 4.5g / 10 ms |

| | |
|---|---------------------------|
| <ul style="list-style-type: none"> • at DC | 7.7g / 5 ms, 4.5g / 10 ms |
| Shock resistance with sine pulse | |
| <ul style="list-style-type: none"> • at AC | 12g / 5 ms, 7g / 10 ms |
| <ul style="list-style-type: none"> • at DC | 12g / 5 ms, 7g / 10 ms |
| Mechanical service life (switching cycles) | |
| <ul style="list-style-type: none"> • of contactor typical | 10 000 000 |
| <ul style="list-style-type: none"> • of the contactor with added electronics-compatible auxiliary switch block typical | 5 000 000 |
| <ul style="list-style-type: none"> • of the contactor with added auxiliary switch block typical | 10 000 000 |
| Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750 | K |
| Reference code acc. to DIN EN 81346-2 | Q |

Ambient conditions

| | |
|--|----------------|
| Installation altitude at height above sea level | |
| <ul style="list-style-type: none"> • maximum | 2 000 m |
| Ambient temperature | |
| <ul style="list-style-type: none"> • during operation | -25 ... +60 °C |
| <ul style="list-style-type: none"> • during storage | -55 ... +80 °C |

Main circuit

| | |
|---|----------------------|
| Number of poles for main current circuit | 3 |
| Number of NO contacts for main contacts | 3 |
| Operating voltage | |
| <ul style="list-style-type: none"> • at AC-3 rated value maximum | 690 V |
| Operating current | |
| <ul style="list-style-type: none"> • at AC-1 at 400 V <ul style="list-style-type: none"> — at ambient temperature 40 °C rated value | 80 A |
| <ul style="list-style-type: none"> • at AC-1 <ul style="list-style-type: none"> — up to 690 V at ambient temperature 40 °C rated value — up to 690 V at ambient temperature 60 °C rated value | 80 A 70 A |
| <ul style="list-style-type: none"> • at AC-2 at 400 V rated value | 65 A |
| <ul style="list-style-type: none"> • at AC-3 <ul style="list-style-type: none"> — at 400 V rated value — at 500 V rated value — at 690 V rated value | 65 A 65 A 47 A |
| <ul style="list-style-type: none"> • at AC-4 at 400 V rated value | 55 A |
| <ul style="list-style-type: none"> • at AC-5a up to 690 V rated value | 70.4 A |
| <ul style="list-style-type: none"> • at AC-5b up to 400 V rated value | 53.9 A |
| <ul style="list-style-type: none"> • at AC-6a | |

| | |
|--|--------------------|
| — up to 230 V for current peak value n=20 rated value | 56.9 A |
| — up to 400 V for current peak value n=20 rated value | 56.9 A |
| — up to 500 V for current peak value n=20 rated value | 56.9 A |
| — up to 690 V for current peak value n=20 rated value | 47 A |
| • at AC-6a | |
| — up to 230 V for current peak value n=30 rated value | 38 A |
| — up to 400 V for current peak value n=30 rated value | 38 A |
| — up to 500 V for current peak value n=30 rated value | 38 A |
| — up to 690 V for current peak value n=30 rated value | 38 A |
| Minimum cross-section in main circuit | |
| • at maximum AC-1 rated value | 25 mm ² |
| Operating current for approx. 200000 operating cycles at AC-4 | |
| • at 400 V rated value | 28 A |
| • at 690 V rated value | 22 A |
| Operating current | |
| • at 1 current path at DC-1 | |
| — at 24 V rated value | 55 A |
| — at 110 V rated value | 4.5 A |
| — at 220 V rated value | 1 A |
| — at 440 V rated value | 0.4 A |
| — at 600 V rated value | 0.25 A |
| • with 2 current paths in series at DC-1 | |
| — at 24 V rated value | 55 A |
| — at 110 V rated value | 45 A |
| — at 220 V rated value | 5 A |
| — at 440 V rated value | 1 A |
| — at 600 V rated value | 0.8 A |
| • with 3 current paths in series at DC-1 | |
| — at 24 V rated value | 55 A |
| — at 110 V rated value | 55 A |
| — at 220 V rated value | 45 A |
| — at 440 V rated value | 2.9 A |
| — at 600 V rated value | 1.4 A |
| Operating current | |

| | |
|--|--|
| <ul style="list-style-type: none"> • at 1 current path at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value • with 2 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value • with 3 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value | <p>35 A</p> <p>2.5 A</p> <p>1 A</p> <p>0.1 A</p> <p>0.06 A</p> <p>55 A</p> <p>25 A</p> <p>5 A</p> <p>0.27 A</p> <p>0.16 A</p> <p>55 A</p> <p>55 A</p> <p>25 A</p> <p>0.6 A</p> <p>0.35 A</p> |
| Operating power | |
| <ul style="list-style-type: none"> • at AC-1 <ul style="list-style-type: none"> — at 230 V rated value — at 230 V at 60 °C rated value — at 400 V rated value — at 400 V at 60 °C rated value — at 690 V rated value — at 690 V at 60 °C rated value • at AC-2 at 400 V rated value • at AC-3 <ul style="list-style-type: none"> — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 690 V rated value | <p>30 kW</p> <p>26 kW</p> <p>53 kW</p> <p>46 kW</p> <p>91 kW</p> <p>79 kW</p> <p>30 kW</p> <p>18.5 kW</p> <p>30 kW</p> <p>37 kW</p> <p>37 kW</p> |
| Operating power for approx. 200000 operating cycles at AC-4 | |
| <ul style="list-style-type: none"> • at 400 V rated value • at 690 V rated value | <p>14.7 kW</p> <p>20 kW</p> |
| Thermal short-time current limited to 10 s | 520 A |
| Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor | 3.8 W |
| No-load switching frequency | |
| <ul style="list-style-type: none"> • at AC • at DC | <p>1 500 1/h</p> <p>1 500 1/h</p> |

| | |
|--|---|
| Operating frequency | |
| <ul style="list-style-type: none"> • at AC-1 maximum • at AC-2 maximum • at AC-3 maximum • at AC-4 maximum | <p>800 1/h</p> <p>400 1/h</p> <p>700 1/h</p> <p>200 1/h</p> |
| Control circuit/ Control | |
| Type of voltage of the control supply voltage | AC/DC |
| Control supply voltage at AC | |
| <ul style="list-style-type: none"> • at 50 Hz rated value • at 60 Hz rated value | <p>20 ... 33 V</p> <p>20 ... 33 V</p> |
| Control supply voltage at DC | |
| <ul style="list-style-type: none"> • rated value | 20 ... 33 V |
| Operating range factor control supply voltage rated value of magnet coil at DC | |
| <ul style="list-style-type: none"> • initial value • Full-scale value | <p>0.8</p> <p>1.1</p> |
| Operating range factor control supply voltage rated value of magnet coil at AC | |
| <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | <p>0.8 ... 1.1</p> <p>0.8 ... 1.1</p> |
| Design of the surge suppressor | with varistor |
| Inrush current peak | |
| <ul style="list-style-type: none"> • at 24 V | 2.8 A |
| Duration of inrush current peak | |
| <ul style="list-style-type: none"> • at 24 V | 15 µs |
| Apparent pick-up power of magnet coil at AC | |
| <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | <p>40 V·A</p> <p>40 V·A</p> |
| Apparent holding power of magnet coil at AC | |
| <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | <p>2 V·A</p> <p>2 V·A</p> |
| Closing power of magnet coil at DC | 23 W |
| Holding power of magnet coil at DC | 1 W |
| Closing delay | |
| <ul style="list-style-type: none"> • at AC • at DC | <p>45 ... 70 ms</p> <p>45 ... 60 ms</p> |
| Opening delay | |
| <ul style="list-style-type: none"> • at AC • at DC | <p>35 ... 55 ms</p> <p>35 ... 55 ms</p> |
| Arcing time | 10 ... 20 ms |
| Residual current of the electronics for control with signal <0> | |

- at AC at 230 V maximum permissible
- at DC at 24 V maximum permissible

20 mA

20 mA

Auxiliary circuit

| | |
|---|---|
| Number of NC contacts for auxiliary contacts | |
| • instantaneous contact | 1 |
| Number of NO contacts for auxiliary contacts | |
| • instantaneous contact | 1 |
| Operating current at AC-12 maximum | 10 A |
| Operating current at AC-15 | |
| • at 230 V rated value | 10 A |
| • at 400 V rated value | 3 A |
| • at 500 V rated value | 2 A |
| • at 690 V rated value | 1 A |
| Operating current at DC-12 | |
| • at 24 V rated value | 10 A |
| • at 48 V rated value | 6 A |
| • at 60 V rated value | 6 A |
| • at 110 V rated value | 3 A |
| • at 125 V rated value | 2 A |
| • at 220 V rated value | 1 A |
| • at 600 V rated value | 0.15 A |
| Operating current at DC-13 | |
| • at 24 V rated value | 10 A |
| • at 48 V rated value | 2 A |
| • at 60 V rated value | 2 A |
| • at 110 V rated value | 1 A |
| • at 125 V rated value | 0.9 A |
| • at 220 V rated value | 0.3 A |
| • at 600 V rated value | 0.1 A |
| Contact reliability of auxiliary contacts | 1 faulty switching per 100 million (17 V, 1 mA) |

UL/CSA ratings

| | |
|---|-------|
| Full-load current (FLA) for three-phase AC motor | |
| • at 480 V rated value | 65 A |
| • at 600 V rated value | 52 A |
| Yielded mechanical performance [hp] | |
| • for single-phase AC motor | |
| — at 110/120 V rated value | 5 hp |
| — at 230 V rated value | 10 hp |
| • for three-phase AC motor | |
| — at 200/208 V rated value | 20 hp |
| — at 220/230 V rated value | 20 hp |

| | |
|---|-------------|
| — at 460/480 V rated value | 50 hp |
| — at 575/600 V rated value | 50 hp |
| Contact rating of auxiliary contacts according to UL | A600 / P600 |

Short-circuit protection

| | |
|---|--|
| Design of the fuse link | |
| <ul style="list-style-type: none"> • for short-circuit protection of the main circuit <ul style="list-style-type: none"> — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required | <p>gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200 A (415 V, 80 kA)</p> <p>gG: 125A (690V,100kA), aM: 63A (690V,100kA), BS88: 100A (415V,80kA)</p> <p>gG: 10 A (500 V, 1 kA)</p> |

Installation/ mounting/ dimensions

| | |
|---|--|
| Mounting position | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| Mounting type | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 |
| <ul style="list-style-type: none"> • Side-by-side mounting | Yes |
| Height | 114 mm |
| Width | 55 mm |
| Depth | 130 mm |
| Required spacing | |
| <ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — forwards — upwards — downwards — at the side • for grounded parts <ul style="list-style-type: none"> — forwards — upwards — at the side — downwards • for live parts <ul style="list-style-type: none"> — forwards — upwards — downwards — at the side | <p>10 mm</p> <p>10 mm</p> <p>10 mm</p> <p>0 mm</p> <p>10 mm</p> <p>10 mm</p> <p>6 mm</p> <p>10 mm</p> <p>10 mm</p> <p>10 mm</p> <p>10 mm</p> <p>10 mm</p> <p>10 mm</p> <p>6 mm</p> |

Connections/ Terminals

| | |
|---|--|
| Type of electrical connection | |
| <ul style="list-style-type: none"> • for main current circuit • for auxiliary and control current circuit | <p>screw-type terminals</p> <p>spring-loaded terminals</p> |

| | |
|---|--|
| Type of connectable conductor cross-sections <ul style="list-style-type: none"> • for main contacts <ul style="list-style-type: none"> — single or multi-stranded — finely stranded with core end processing • at AWG conductors for main contacts | 2x (1 ... 35 mm ²), 1x (1 ... 50 mm ²) 2x (1 ... 25 mm ²), 1x (1 ... 35 mm ²) 2x (18 ... 2), 1x (18 ... 1) |
| Connectable conductor cross-section for main contacts <ul style="list-style-type: none"> • finely stranded with core end processing | 1 ... 35 mm ² |
| Connectable conductor cross-section for auxiliary contacts <ul style="list-style-type: none"> • single or multi-stranded • finely stranded with core end processing • finely stranded without core end processing | 0.5 ... 2.5 mm ² 0.5 ... 1.5 mm ² 0.5 ... 2.5 mm ² |
| Type of connectable conductor cross-sections <ul style="list-style-type: none"> • for auxiliary contacts <ul style="list-style-type: none"> — single or multi-stranded — finely stranded with core end processing — finely stranded without core end processing • at AWG conductors for auxiliary contacts | 2x (0,5 ... 2,5 mm ²) 2x (0.5 ... 1.5 mm ²) 2x (0.5 ... 2.5 mm ²) 2x (20 ... 14) |
| AWG number as coded connectable conductor cross section <ul style="list-style-type: none"> • for main contacts • for auxiliary contacts | 18 ... 1 20 ... 14 |

Safety related data

| | |
|---|--|
| B10 value <ul style="list-style-type: none"> • with high demand rate acc. to SN 31920 | 1 000 000 |
| Proportion of dangerous failures <ul style="list-style-type: none"> • with low demand rate acc. to SN 31920 • with high demand rate acc. to SN 31920 | 40 % 73 % |
| Failure rate [FIT] <ul style="list-style-type: none"> • with low demand rate acc. to SN 31920 | 100 FIT |
| Product function <ul style="list-style-type: none"> • Mirror contact acc. to IEC 60947-4-1 • positively driven operation acc. to IEC 60947-5-1 | Yes No |
| T1 value for proof test interval or service life acc. to IEC 61508 | 20 y |
| Protection against electrical shock | finger-safe when touched vertically from front acc. to IEC 60529 |

Certificates/ approvals

| | |
|--------------------------|-----|
| General Product Approval | EMC |
|--------------------------|-----|



[Miscellaneous](#)



| | | | |
|---------------------------------------|---------------------------|-------------------|-------------------|
| Functional Safety/Safety of Machinery | Declaration of Conformity | Test Certificates | Marine / Shipping |
|---------------------------------------|---------------------------|-------------------|-------------------|

[Type Examination Certificate](#)



[Miscellaneous](#)

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



| |
|-------------------|
| Marine / Shipping |
|-------------------|



| |
|-------|
| other |
|-------|

[Confirmation](#)

| |
|---------------------|
| Further information |
|---------------------|

Information- and Downloadcenter (Catalogs, Brochures,...)

www.siemens.com/sirius/catalogs

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2037-3NB30>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2037-3NB30>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2037-3NB30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)




http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2037-3NB30&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2037-3NB30/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2037-3NB30&objecttype=14&gridview=view1>

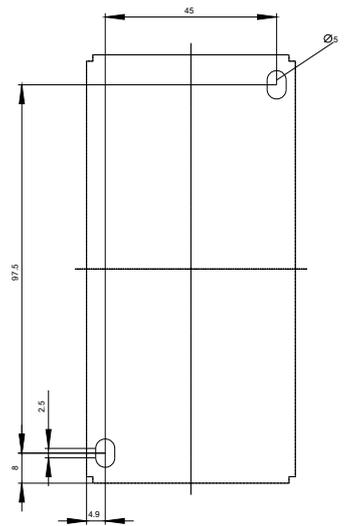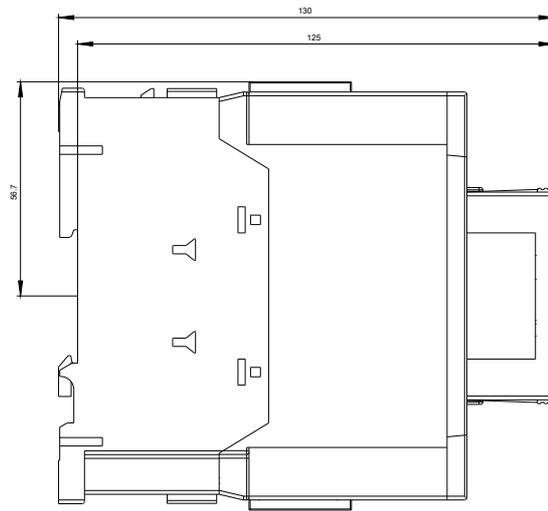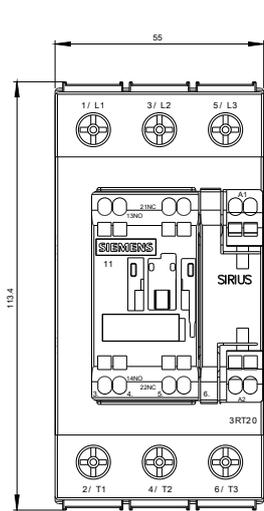

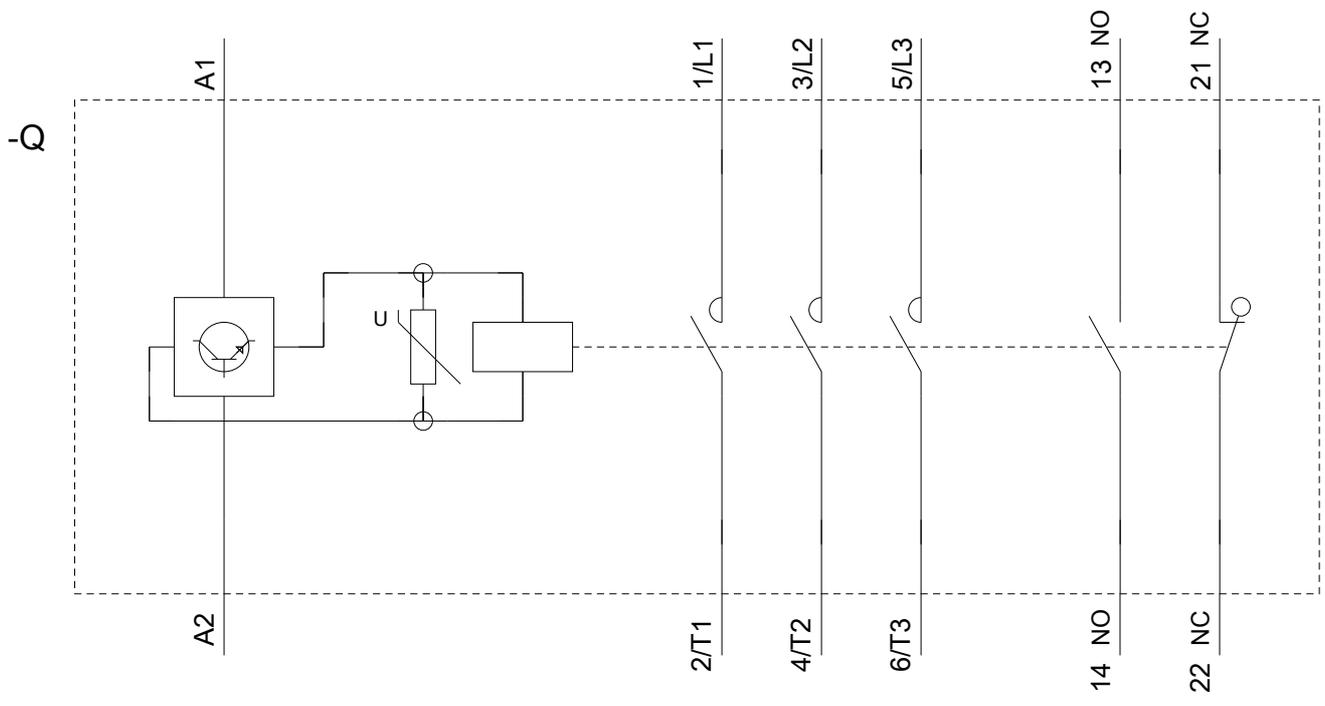

last modified:

08/09/2019