



contactor AC-1, 140 A, 400 V / 40 °C, 4-pole, 110 V AC, 50/60 Hz, auxiliary contacts: 1 NO + 1 NC, screw terminal, size: S3

| | |
|---|------------------------------|
| product brand name | SIRIUS |
| product designation | Contacteur |
| product type designation | 3RT23 |
| General technical data | |
| size of contactor | S3 |
| product extension | |
| • function module for communication | No |
| • auxiliary switch | Yes |
| power loss [W] for rated value of the current | |
| • at AC in hot operating state | 47.2 W |
| • at AC in hot operating state per pole | 11.8 W |
| type of calculation of power loss depending on pole | quadratic |
| insulation voltage | |
| • of main circuit with degree of pollution 3 rated value | 690 V |
| • of the auxiliary and control circuit with degree of pollution 3 rated value | 690 V |
| surge voltage resistance | |
| • of main circuit rated value | 8 kV |
| • of auxiliary circuit rated value | 6 kV |
| shock resistance at rectangular impulse | |
| • at AC | 6.7 g / 5 ms, 4.0 g / 10 ms |
| • at DC | 6.7 g / 5 ms, 4g / 10 ms |
| shock resistance with sine pulse | |
| • at AC | 10.6 g / 5 ms, 6.3 g / 10 ms |
| • at DC | 10.6 g / 5 ms, 6.3 g / 10 ms |
| mechanical service life (operating cycles) | |
| • of contactor typical | 10 000 000 |
| • of the contactor with added auxiliary switch block typical | 10 000 000 |
| reference code according to IEC 81346-2 | Q |
| Substance Prohibition (Date) | 09/01/2017 |
| Weight | 2.067 kg |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| • during operation | -25 ... +60 °C |
| • during storage | -55 ... +80 °C |
| relative humidity minimum | 10 % |
| relative humidity at 55 °C according to IEC 60068-2-30 maximum | 95 % |
| Environmental footprint | |
| Environmental Product Declaration (EPD) | Yes |

| | |
|--|----------|
| Global Warming Potential [CO2 eq] total | 481 kg |
| Global Warming Potential [CO2 eq] during manufacturing | 9.57 kg |
| Global Warming Potential [CO2 eq] during operation | 473 kg |
| Global Warming Potential [CO2 eq] after end of life | -1.54 kg |

Main circuit

| | |
|---|--------------------|
| number of poles for main current circuit | 4 |
| number of NO contacts for main contacts | 4 |
| operational current | |
| <ul style="list-style-type: none"> at AC-1 at 400 V at ambient temperature 40 °C rated value | 140 A |
| <ul style="list-style-type: none"> at AC-1 <ul style="list-style-type: none"> up to 690 V at ambient temperature 40 °C rated value | 140 A |
| <ul style="list-style-type: none"> at AC-1 <ul style="list-style-type: none"> up to 690 V at ambient temperature 60 °C rated value | 130 A |
| minimum cross-section in main circuit at maximum AC-1 rated value | 50 mm ² |
| no-load switching frequency | |
| <ul style="list-style-type: none"> at AC | 5 000 1/h |
| operating frequency at AC-1 maximum | 1 000 1/s |

Control circuit/ Control

| | |
|---|------------------|
| type of voltage | AC |
| type of voltage of the control supply voltage | AC |
| control supply voltage at AC | |
| <ul style="list-style-type: none"> at 50 Hz rated value | 110 V |
| <ul style="list-style-type: none"> at 60 Hz rated value | 110 V |
| operating range factor control supply voltage rated value of magnet coil at AC | |
| <ul style="list-style-type: none"> at 50 Hz | 0.8 ... 1.1 |
| <ul style="list-style-type: none"> at 60 Hz | 0.85 ... 1.1 |
| apparent pick-up power of magnet coil at AC | |
| <ul style="list-style-type: none"> at 50 Hz | 348 VA |
| <ul style="list-style-type: none"> at 60 Hz | 296 VA |
| inductive power factor with closing power of the coil | |
| <ul style="list-style-type: none"> at 50 Hz | 0.62 |
| <ul style="list-style-type: none"> at 60 Hz | 0.55 |
| apparent holding power of magnet coil at AC | |
| <ul style="list-style-type: none"> at 50 Hz | 25 VA |
| <ul style="list-style-type: none"> at 60 Hz | 18 VA |
| inductive power factor with the holding power of the coil | |
| <ul style="list-style-type: none"> at 50 Hz | 0.35 |
| <ul style="list-style-type: none"> at 60 Hz | 0.41 |
| closing delay | |
| <ul style="list-style-type: none"> at AC | 13 ... 50 ms |
| opening delay | |
| <ul style="list-style-type: none"> at AC | 10 ... 21 ms |
| arcing time | 10 ... 20 ms |
| control version of the switch operating mechanism | Standard A1 - A2 |

Auxiliary circuit

| | |
|---|------|
| number of NC contacts for auxiliary contacts | 1 |
| <ul style="list-style-type: none"> attachable | 2 |
| <ul style="list-style-type: none"> instantaneous contact | 1 |
| number of NO contacts for auxiliary contacts | 1 |
| <ul style="list-style-type: none"> attachable | 2 |
| <ul style="list-style-type: none"> instantaneous contact | 1 |
| operational current at AC-12 maximum | 10 A |
| operational current at AC-15 | |
| <ul style="list-style-type: none"> at 230 V rated value | 6 A |
| <ul style="list-style-type: none"> at 400 V rated value | 3 A |
| <ul style="list-style-type: none"> at 500 V rated value | 2 A |
| <ul style="list-style-type: none"> at 690 V rated value | 1 A |
| operational current at DC-12 | |

| | |
|---|---|
| <ul style="list-style-type: none"> • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value | <p>10 A 6 A 6 A 3 A 2 A 1 A 0.15 A</p> |
| operational current at DC-13 <ul style="list-style-type: none"> • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value | <p>10 A 2 A 1 A 0.9 A 0.3 A 0.1 A</p> |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required | gG: 10 A (230 V, 400 A) |
| contact reliability of auxiliary contacts | 1 faulty switching per 100 million (17 V, 1 mA) |
| UL/CSA ratings | |
| contact rating of auxiliary contacts according to UL | A600 / P600 |
| Short-circuit protection | |
| product function short circuit protection | No |
| design of the fuse link <ul style="list-style-type: none"> • for short-circuit protection of the main circuit <ul style="list-style-type: none"> — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required | <p>gG: 250 A (690 V, 100 kA) gR: 250 A (690 V, 100 kA) gG: 10 A (690 V, 1 kA)</p> |
| Installation/ mounting/ dimensions | |
| mounting position | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| fastening method side-by-side mounting | Yes |
| fastening method | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 |
| height | 140 mm |
| width | 96 mm |
| depth | 152 mm |
| required spacing <ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — forwards — upwards — downwards — at the side • for grounded parts <ul style="list-style-type: none"> — forwards — upwards — at the side — downwards • for live parts <ul style="list-style-type: none"> — forwards — upwards — downwards — at the side | <p>20 mm 10 mm 10 mm 0 mm 20 mm 10 mm 10 mm 10 mm 20 mm 10 mm 10 mm 10 mm</p> |
| Connections/ Terminals | |
| type of electrical connection <ul style="list-style-type: none"> • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil | <p>screw-type terminals screw-type terminals Screw-type terminals Screw-type terminals</p> |
| type of connectable conductor cross-sections for main contacts <ul style="list-style-type: none"> • stranded • solid or stranded • finely stranded with core end processing | <p>2x (6 ... 16 mm²), 2x (10 ... 50 mm²), 1x (10 ... 70 mm²) 2x (2.5 ... 16 mm²), 2x (6 ... 16 mm²), 2x (10 ... 50 mm²), 1x (10 ... 70 mm²) 2x (2.5 ... 35 mm²), 1x (2.5 ... 50 mm²)</p> |
| connectable conductor cross-section for main contacts | |

| | |
|---|--|
| <ul style="list-style-type: none"> • solid • solid or stranded • stranded • finely stranded with core end processing | <p>2.5 ... 16 mm²</p> <p>4 ... 70 mm²</p> <p>6 ... 70 mm²</p> <p>2.5 ... 50 mm²</p> |
| connectable conductor cross-section for auxiliary contacts <ul style="list-style-type: none"> • solid or stranded • finely stranded with core end processing | <p>0.5 ... 2.5 mm²</p> <p>0.5 ... 2.5 mm²</p> |
| type of connectable conductor cross-sections <ul style="list-style-type: none"> • for auxiliary contacts <ul style="list-style-type: none"> — solid — solid or stranded — finely stranded with core end processing • for AWG cables for auxiliary contacts | <p>2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)</p> <p>2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)</p> <p>2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)</p> <p>2x (20 ... 16), 2x (18 ... 14)</p> |
| AWG number as coded connectable conductor cross section <ul style="list-style-type: none"> • for main contacts • for auxiliary contacts | <p>10 ... 2</p> <p>20 ... 14</p> |

Safety related data

| | |
|---|----------------------|
| product function <ul style="list-style-type: none"> • mirror contact according to IEC 60947-4-1 • positively driven operation according to IEC 60947-5-1 | <p>Yes</p> <p>No</p> |
|---|----------------------|

Electrical Safety

| | |
|--|--|
| protection class IP on the front according to IEC 60529 | IP20 |
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front |

Communication/ Protocol

| | |
|---|----|
| product function bus communication | No |
|---|----|

Approvals Certificates

General Product Approval



[Confirmation](#)



[KC](#)

| | | | |
|--------------------------|-----|-------------------|-------------------|
| General Product Approval | EMV | Test Certificates | Marine / Shipping |
|--------------------------|-----|-------------------|-------------------|



[Type Test Certificates/Test Report](#)



| | | | | |
|-------------------|-------|---------|-----------------|-------------|
| Marine / Shipping | other | Railway | Dangerous goods | Environment |
|-------------------|-------|---------|-----------------|-------------|



[Confirmation](#)

[Special Test Certificate](#)

[Transport Information](#)



Environment

[Environmental Confirmations](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2346-1AG20>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2346-1AG20>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2346-1AG20>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2346-1AG20&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2346-1AG20/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2346-1AG20&objecttype=14&gridview=view1>

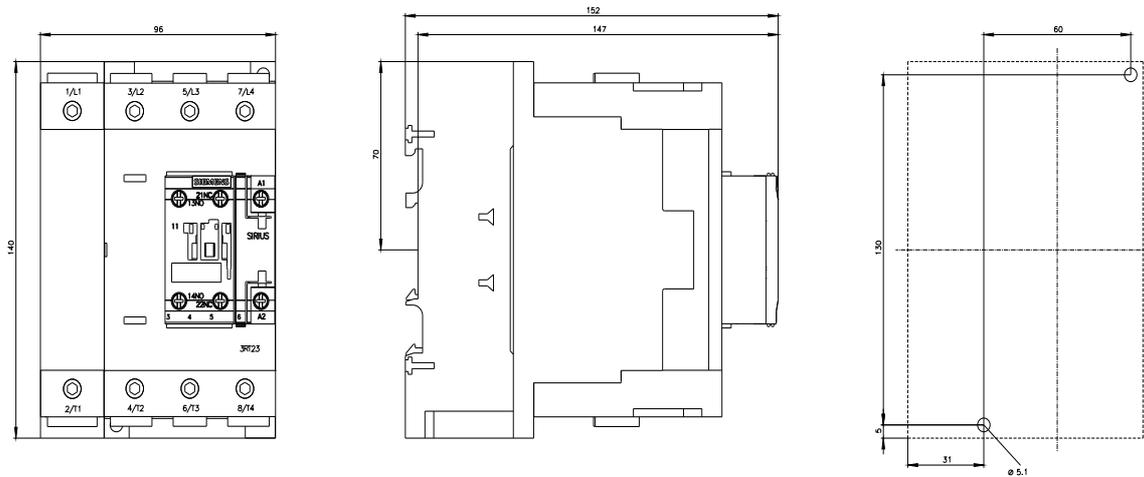

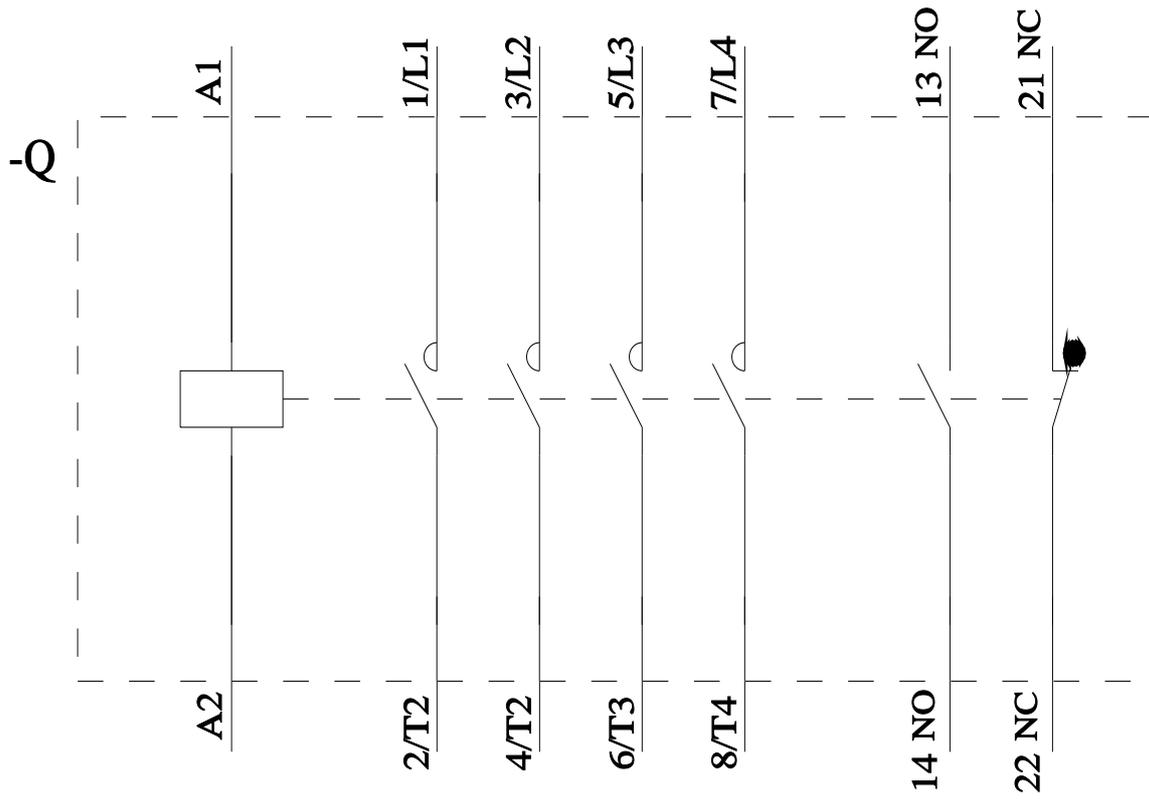

last modified:

3/14/2024 