

SIRIUS CABLE-OPER. SWITCH METAL HOUSING,2XM20X1.5;
2NC, WITH CATCHES, ACC. TO EN ISO 13850 AND BUTTON
RESETTING FOR CABLES UP TO TO 25M IN LENGTH



Figure similar

Product designation	cable-operated switch
General technical data	
Product function	
• EMERGENCY STOP function	Yes
Protection class IP	IP65
Equipment marking	
• acc. to DIN EN 61346-2	S
• acc. to DIN EN 81346-2	S
Enclosure	
Material of the enclosure	metal
Product component	
• EMERGENCY STOP device	No
Color	
• of top part of the enclosure	grey
Ambient conditions	
Ambient temperature	

- during operation

-25 ... +70 °C

Installation/ mounting/ dimensions

Mounting type	screw fixing
Height	164.5 mm
Width	52 mm
Depth	57.5 mm

Certificates/approvals

General Product Approval	Declaration of Conformity	Shipping Approval
--------------------------	---------------------------	-------------------



CCC



CSA



EG-Konf.



ABS



LRS

Shipping Approval	other
-------------------	-------



PRS



RINA

[Bestätigungen](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SE7150-1BF00>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SE7150-1BF00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SE7150-1BF00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SE7150-1BF00&lang=en

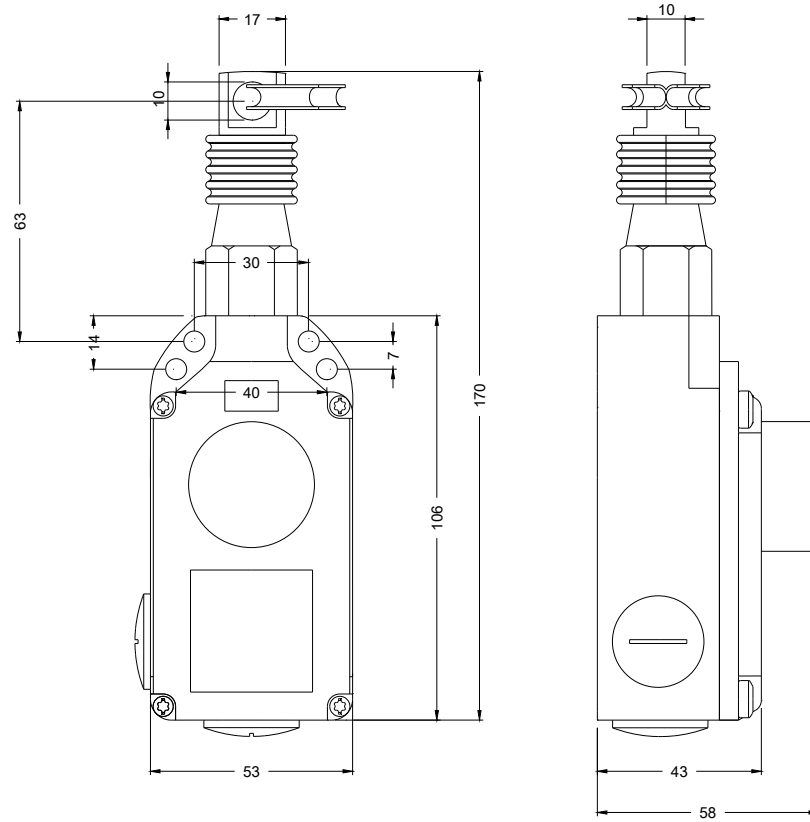

last modified:

12/20/2016