



LED module with integrated LED 6-24V AC/DC green, screw terminal, for floor mounting

Siemens  
EcoTech

|  |  |
|--|--|
| product brand name                                   | SIRIUS ACT                             |
| product designation                                  | LED module                             |
| product type designation                             | 3SU1                                   |
| <b>General technical data</b>                        |  |
| product component                                    |  |
| • diode  | Yes                                    |
| • lamp transformer                                   | No                                     |
| • light source                                       | Yes                                    |
| • series resistor                                    | No                                     |
| insulation voltage rated value                       | 320 V                                  |
| degree of pollution                                  | 3                                      |
| type of voltage of the operating voltage             | AC/DC                                  |
| • for actuation                                      | AC/DC                                  |
| surge voltage resistance rated value                 | 4 kV                                   |
| consumed current maximum                             | 30 mA                                  |
| protection class IP                                  |  |
| • of the enclosure                                   | IP40                                   |
| • of the terminal                                    | IP20                                   |
| shock resistance                                     |  |
| • according to IEC 60068-2-27                        | sinusoidal half-wave 15g / 11 ms       |
| • for railway applications according to EN 61373     | Category 1, Class B                    |
| vibration resistance                                 |  |
| • according to IEC 60068-2-6                         | 10 ... 500 Hz: 5g                      |
| • for railway applications according to EN 61373     | Category 1, Class B                    |
| operating period typical                             | 100 000 h                              |
| reference code according to IEC 81346-2              | P                                      |
| Substance Prohibitance (Date)                        | 10/01/2014                             |
| SVHC substance name                                  | Lead monoxide (lead oxide) - 1317-36-8 |
| Weight   | 0.01 kg                                |
| operating voltage                                    |  |
| • at AC  |  |
| — at 50 Hz rated value                               | 6 ... 24 V                             |
| — at 60 Hz rated value                               | 6 ... 24 V                             |
| • at DC rated value                                  | 6 ... 24 V                             |
| relative positive tolerance of the operating voltage | 20 %                                   |
| relative negative tolerance of the operating voltage | 20 %                                   |
| <b>Control circuit/ Control</b>                      |  |

|  |   |
|--|---|
| <b>inrush current maximum</b>  | 2 A   |
| <b>Connections/ Terminals</b>  |   |
| <b>type of electrical connection</b>   | screw terminal  |
| <b>type of connectable conductor cross-sections</b>  |   |
| <ul style="list-style-type: none"> <li>• solid with core end processing</li> <li>• solid without core end processing</li> <li>• finely stranded with core end processing</li> <li>• finely stranded without core end processing</li> <li>• for AWG cables</li> </ul> | 2x (0.5 ... 0.75 mm <sup>2</sup> )<br>2x (1.0 ... 1.5 mm <sup>2</sup> )<br>2x (0.5 ... 1.5 mm <sup>2</sup> )<br>2x (1,0 ... 1,5 mm <sup>2</sup> )<br>2x (18 ... 14) |
| connectable conductor cross-section finely stranded with core end processing   | 0.5 ... 1.5 mm <sup>2</sup>   |
| tightening torque with screw-type terminals  | 0.8 ... 0.9 N·m   |

|                                  |                   |
|----------------------------------|-------------------|
| <b>Lamp</b>                      |                   |
| <b>type of light source</b>      | LED               |
| <b>color of the light source</b> | green             |
| <b>light intensity</b>           | 900 ... 1 400 mcd |

|   |          |
|---|----------|
| <b>ATEX</b>   |          |
| <b>certificate of suitability</b>   |          |
| <ul style="list-style-type: none"> <li>• ATEX</li> <li>• IECEx</li> </ul> | No<br>No |

|  |  |
|--|--|
| <b>Ambient conditions</b>  |  |
| <b>ambient temperature</b>   |  |
| <ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> </ul> | -25 ... +70 °C<br>-40 ... +80 °C   |
| environmental category during operation according to IEC 60721                                 | 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95%, no condensation in operation permitted) |

|  |                 |
|--|-----------------|
| <b>Environmental footprint</b>                         |                 |
| Environmental Product Declaration (EPD)                | Yes             |
| Global Warming Potential [CO2 eq] total                | 0.787 kg        |
| Global Warming Potential [CO2 eq] during manufacturing | 0.566 kg        |
| Global Warming Potential [CO2 eq] during operation     | 0.235 kg        |
| Global Warming Potential [CO2 eq] after end of life    | -0.015 kg       |
| Siemens Eco Profile (SEP)                              | Siemens EcoTech |

|  |                |
|--|----------------|
| <b>Installation/ mounting/ dimensions</b>                                      |                |
| <b>fastening method</b>  |                |
| <ul style="list-style-type: none"> <li>• of modules and accessories</li> </ul> | Floor mounting |
| <b>height</b>  | 33.2 mm        |
| <b>width</b>   | 9.8 mm         |
| <b>depth</b>   | 29.4 mm        |

|                                 |     |
|---------------------------------|-----|
| <b>Approvals Certificates</b>   |     |
| <b>General Product Approval</b> | EMV |



[Confirmation](#)



|                          |              |                    |
|--------------------------|--------------|--------------------|
| <b>Test Certificates</b> | <b>other</b> | <b>Environment</b> |
|--------------------------|--------------|--------------------|

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)

[Confirmation](#)



Siemens EcoTech



[Environmental Confirmations](#)

|                            |
|----------------------------|
| <b>Further information</b> |
|----------------------------|

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>


**Information- and Downloadcenter (Catalogs, Brochures,...)**


<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mifb=3SU1401-2BG40-1AA0>

**Cax online generator**

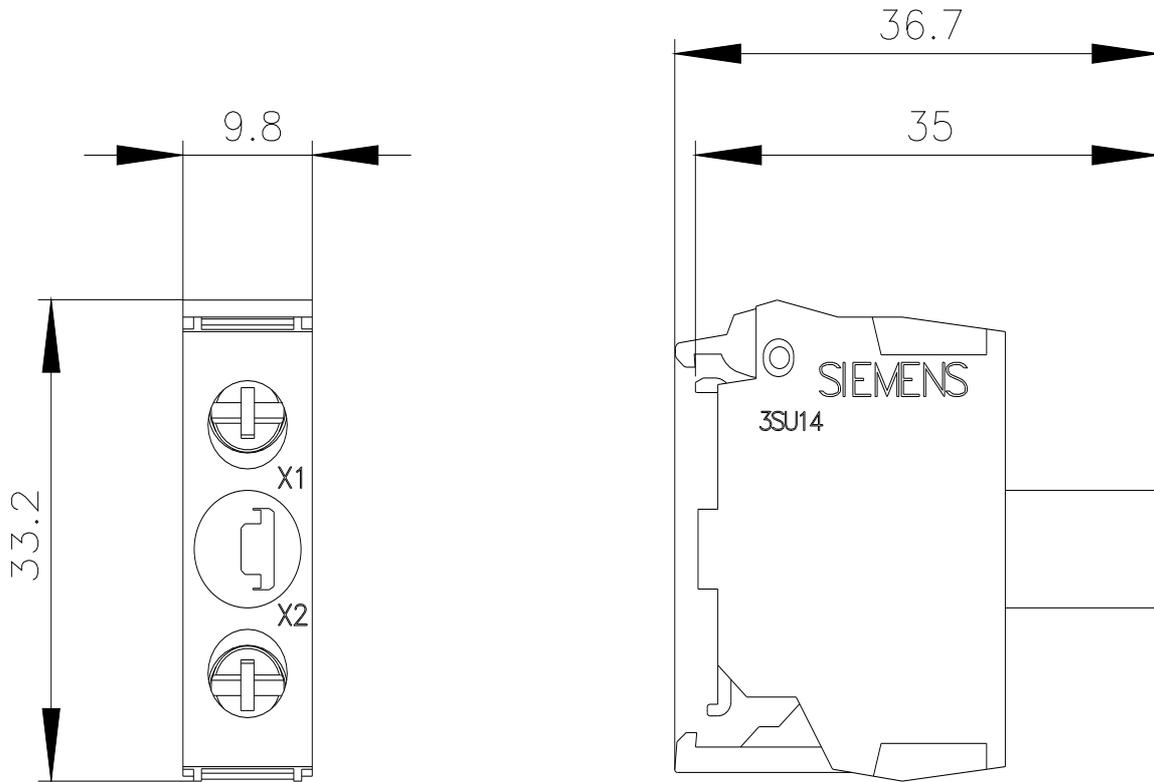

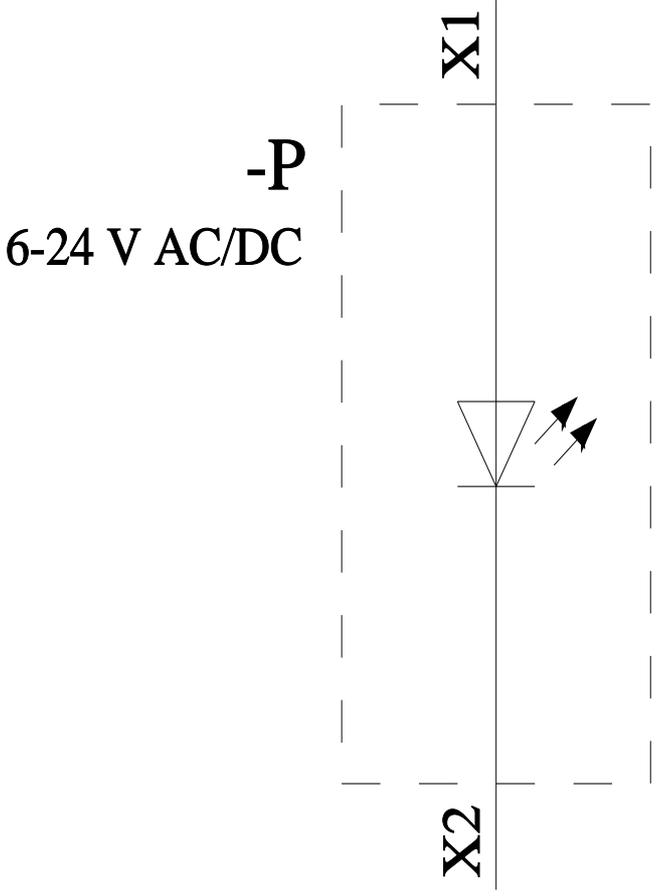

last modified:

4/8/2024 