



SIRIUS safety relay safety-oriented Standstill monitoring 230 V AC, 45 mm screw terminal EC instantaneous: 3 NO + 1 NC EC delayed: 0 SC: 3 Auto-start Basic unit max. error category EN 954-1: 4 Maximum achievable PL according to EN 13849-1: Maximum achievable SIL according to IEC 61508: 3

product brand name	SIRIUS
product designation	Standstill monitor
design of the product	for safe stoppage monitoring
product type designation	3TK28
Product Function	
product function	
<ul style="list-style-type: none"> • automatic start • light barrier monitoring • standstill monitoring • protective door monitoring • magnetically operated switch monitoring NC-NO • magnetically operated switch monitoring NC-NC • rotation speed monitoring • laser scanner monitoring • light array monitoring • EMERGENCY OFF function • monitored start-up • pressure-sensitive mat monitoring 	<p>No</p> <p>No</p> <p>Yes</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p>
suitability for interaction press control	No
suitability for use	
<ul style="list-style-type: none"> • position switch monitoring • EMERGENCY-OFF circuit monitoring • valve monitoring • opto-electronic protection device monitoring • tactile sensor monitoring • magnetically operated switch monitoring • proximity switch monitoring • safety switch • safety-related circuits 	<p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>Yes</p> <p>Yes</p>
General technical data	
certificate of suitability UL approval	Yes
product feature cross-circuit-proof	No
insulation voltage rated value	690 V
surge voltage resistance rated value	6 000 V
protection class IP	
<ul style="list-style-type: none"> • of the enclosure • of the terminal 	<p>IP20</p> <p>IP20</p>
shock resistance	8g / 10 ms
vibration resistance according to IEC 60068-2-6	10 ... 55 Hz: 0.35 mm
operating frequency maximum	1 200 1/h

mechanical service life (operating cycles) typical	50 000 000
electrical endurance (operating cycles) typical	200 000
thermal current of the switching element with contacts maximum	5 A
Substance Prohibittance (Date)	05/01/2012
Weight	0.522 kg
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-40 ... +75 °C
relative humidity during operation	10 ... 95 %
air pressure according to SN 31205	90 ... 106 kPa
Electromagnetic compatibility	
installation environment regarding EMC	This product is suitable for Class A environments only. In household environments, this device can cause unwanted radio interference. The user is required to implement appropriate measures in this case.
EMC emitted interference	IEC 61000-6-2, IEC 61000-6-3
Safety related data	
stop category according to IEC 60204-1	0
average diagnostic coverage level (DCavg)	99 %
IEC 62061	
SIL Claim Limit (subsystem) according to EN 62061	3
Safety Integrity Level (SIL) according to IEC 62061	3
PFHD with high demand rate according to IEC 62061	1.5E-9 1/h
ISO 13849	
category according to EN ISO 13849-1	4
performance level (PL)	
• according to ISO 13849-1	e
IEC 61508	
Safety Integrity Level (SIL)	
• according to IEC 61508	3
• for delayed release circuit according to IEC 61508	SIL3
safety device type according to IEC 61508-2	Type B
Average probability of failure on demand (PFDAvg) with low demand rate acc. to IEC 61508	0.002 1/y
hardware fault tolerance according to IEC 61508	1
T1 value for proof test interval or service life according to IEC 61508	20 a
Electrical Safety	
touch protection against electrical shock	finger-safe
adjustable response value voltage for standstill detection	20 ... 400 mV
adjustable downtime	0.2 ... 6 s
Short-circuit protection	
design of the fuse link for short-circuit protection of the NO contacts of the relay outputs required	quick: 5 A
Inputs	
design of input	
• cascading input/functional switching	No
• feedback input	Yes
• start input	No
number of sensor inputs	
• 1-channel or 2-channel	1
Outputs	
number of outputs as contact-affected switching element	
• as NC contact	
— for signaling function instantaneous contact	2
• as NO contact	
— safety-related instantaneous contact	4
— safety-related delayed switching	0
number of outputs as contact-less semiconductor switching element	

<ul style="list-style-type: none"> ● for signaling function <ul style="list-style-type: none"> — delayed switching — instantaneous contact ● safety-related <ul style="list-style-type: none"> — delayed switching — instantaneous contact 	<p>0</p> <p>2</p> <p>0</p> <p>0</p>
switching capacity current of semiconductor outputs	
<ul style="list-style-type: none"> ● for signaling function at DC-13 at 24 V 	0.1 A
switching capacity current of the NO contacts of the relay outputs at DC-13	
<ul style="list-style-type: none"> ● at 24 V 	2 A
switching capacity current of the NO contacts of the relay outputs at AC-15	
<ul style="list-style-type: none"> ● at 115 V ● at 230 V 	<p>3 A</p> <p>3 A</p>
switching capacity current of the NC contacts of the relay outputs at DC-13	
<ul style="list-style-type: none"> ● at 24 V 	2 A
switching capacity current of the NC contacts of the relay outputs at AC-15	
<ul style="list-style-type: none"> ● at 115 V ● at 230 V 	<p>2 A</p> <p>2 A</p>
voltage measuring range at the measurement inputs at AC according to UL maximum	600 V
voltage measuring range at the measurement inputs at AC maximum	690 V
adjustable response value voltage for standstill detection	20 ... 400 mV
input resistance at the measurement inputs	500 kΩ
Times	
adjustable downtime initial value	0.2 s
adjustable downtime full-scale value	6 s
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage 1 at AC	
<ul style="list-style-type: none"> ● at 50 Hz rated value ● at 60 Hz rated value 	<p>230 V</p> <p>230 V</p>
control supply voltage frequency	
<ul style="list-style-type: none"> ● 1 rated value ● 2 rated value 	<p>50 Hz</p> <p>60 Hz</p>
operating range factor control supply voltage rated value of magnet coil at AC	
<ul style="list-style-type: none"> ● at 50 Hz ● at 60 Hz 	<p>0.8 ... 1.1</p> <p>0.8 ... 1.1</p>
Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw and snap-on mounting
height	138.5 mm
width	45 mm
depth	120 mm
Connections/ Terminals	
type of electrical connection	screw terminal
type of connectable conductor cross-sections	
<ul style="list-style-type: none"> ● solid ● finely stranded with core end processing ● for AWG cables solid ● for AWG cables stranded 	<p>1x (0.5 ... 4.0 mm²), 2x (0.5 ... 2.5 mm²)</p> <p>1x (0.5 ... 2.5 mm²), 2x (0.5 ... 1.5 mm²)</p> <p>2x (20 ... 14)</p> <p>2x (20 ... 14)</p>
connectable conductor cross-section	
<ul style="list-style-type: none"> ● solid ● finely stranded with core end processing 	<p>0.5 ... 4 mm²</p> <p>0.5 ... 2.5 mm²</p>
AWG number as coded connectable conductor cross section	
<ul style="list-style-type: none"> ● solid ● stranded 	<p>20 ... 14</p> <p>20 ... 14</p>

type of electrical connection plug-in socket Yes

Approvals Certificates

General Product Approval



Functional Safety	Test Certificates	other	Railway	Environment
-------------------	-------------------	-------	---------	-------------



[Special Test Certificate](#)

[Confirmation](#)

[Confirmation](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TK2810-0GA01>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TK2810-0GA01>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3TK2810-0GA01>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TK2810-0GA01&lang=en

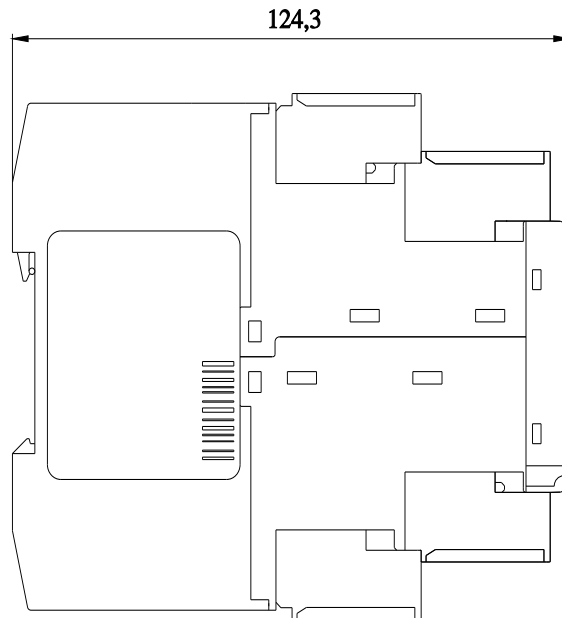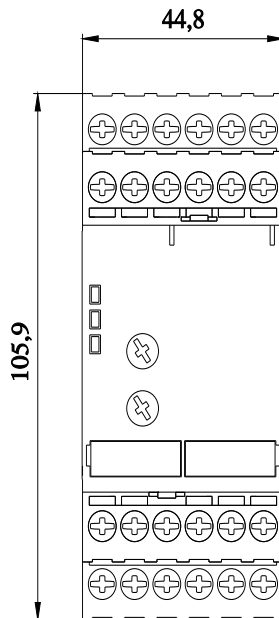

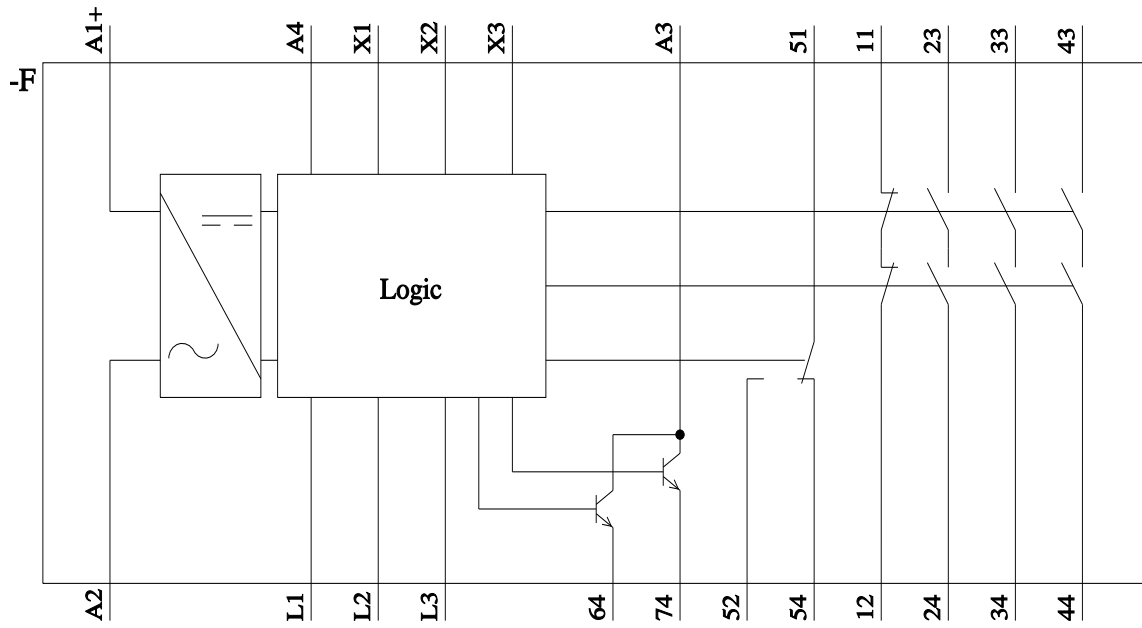

last modified:

4/8/2024 