

Analog monitoring relay Phase sequence monitoring 3 x 320...500 V
50...60 Hz AC 2 change-over contacts spring-type connection system



Figure similar

Product brand name	SIRIUS
Product designation	Network monitoring relay with analog setting
Design of the product	1 function
Product type designation	3UG4

General technical data	
Product function	Phase monitoring relay
Display version LED	Yes
Degree of pollution	3
Type of voltage	
• for monitoring	AC
• of the control supply voltage	AC
Surge voltage resistance rated value	6 kV
Protection class IP	IP20
Shock resistance	
• acc. to IEC 60068-2-27	sinusoidal half-wave 15g / 11 ms
Mechanical service life (switching cycles)	
• typical	10 000 000

Electrical endurance (switching cycles)	
• at AC-15 at 230 V typical	100 000
Thermal current of the switching element with contacts maximum	5 A
Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	K
Reference code acc. to DIN EN 81346-2	K
Reference code acc. to DIN EN 61346-2	K

Product Function

Product function	
• undervoltage detection	No
• Overvoltage detection	No
• phase sequence recognition	Yes
• Phase failure detection	No
• Overvoltage detection 3 phase	No
• undervoltage detection 3 phases	No
• Voltage window recognition 3 phase	No
• Adjustable open/closed-circuit current principle	No
• Auto-reset	Yes

Control circuit/ Control

Control supply voltage at AC	
• at 50 Hz rated value	320 ... 500 V
• at 60 Hz rated value	320 ... 500 V
Operating range factor control supply voltage rated value at AC at 50 Hz	
• initial value	1
• Full-scale value	1
Operating range factor control supply voltage rated value at AC at 60 Hz	
• initial value	1
• Full-scale value	1

Auxiliary circuit

Number of CO contacts	
• delayed switching	2
Operating frequency with 3RT2 contactor maximum	5 000 1/h

Main circuit

Number of poles for main current circuit	3
---	---

Outputs

Ampacity of the output relay at AC-15	
• at 250 V at 50/60 Hz	3 A
• at 400 V at 50/60 Hz	3 A

Ampacity of the output relay at DC-13	
<ul style="list-style-type: none"> • at 24 V • at 125 V • at 250 V 	<p>1 A</p> <p>0.2 A</p> <p>0.1 A</p>
Operating current at 17 V minimum	5 mA
Continuous current of the DIAZED fuse link of the output relay	4 A

Electromagnetic compatibility

Conducted interference	
<ul style="list-style-type: none"> • due to burst acc. to IEC 61000-4-4 • due to conductor-earth surge acc. to IEC 61000-4-5 • due to conductor-conductor surge acc. to IEC 61000-4-5 	<p>2 kV</p> <p>2 kV</p> <p>1 kV</p>
Field-bound parasitic coupling acc. to IEC 61000-4-3	10 V/m
Electrostatic discharge acc. to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge

Galvanic isolation

Galvanic isolation	
<ul style="list-style-type: none"> • between entrance and outlet • between the outputs • between the voltage supply and other circuits 	<p>Yes</p> <p>Yes</p> <p>Yes</p>

Connections/ Terminals






Product function	
<ul style="list-style-type: none"> • removable terminal for auxiliary and control circuit 	Yes
Type of electrical connection	spring-loaded terminals
Type of connectable conductor cross-sections	
<ul style="list-style-type: none"> • solid • finely stranded with core end processing • finely stranded without core end processing • at AWG conductors solid • at AWG conductors stranded 	<p>2x (0.25 ... 1.5 mm²)</p> <p>2 x (0.25 ... 1.5 mm²)</p> <p>2x (0.25 ... 1.5 mm²)</p> <p>2x (24 ... 16)</p> <p>2x (24 ... 16)</p>
Connectable conductor cross-section	
<ul style="list-style-type: none"> • solid • finely stranded with core end processing • finely stranded without core end processing 	<p>0.25 ... 1.5 mm²</p> <p>0.25 ... 1.5 mm²</p> <p>0.25 ... 1.5 mm²</p>
AWG number as coded connectable conductor cross section	
<ul style="list-style-type: none"> • solid • stranded 	<p>24 ... 16</p> <p>24 ... 16</p>

Installation/ mounting/ dimensions

Mounting position	any
Mounting type	snap-on mounting
Height	94 mm
Width	22.5 mm
Depth	91 mm
Required spacing	
<ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — forwards 0 mm — Backwards 0 mm — upwards 0 mm — downwards 0 mm — at the side 0 mm • for grounded parts <ul style="list-style-type: none"> — forwards 0 mm — Backwards 0 mm — upwards 0 mm — at the side 0 mm — downwards 0 mm • for live parts <ul style="list-style-type: none"> — forwards 0 mm — Backwards 0 mm — upwards 0 mm — downwards 0 mm — at the side 0 mm 	

Ambient conditions	
Installation altitude at height above sea level	
<ul style="list-style-type: none"> • maximum 	2 000 m

Certificates/ approvals

General Product Approval		EMC	Declaration of Conformity	
 CCC	 UL		 RCM	 EG-Konf.
				Miscellaneous

Test Certificates	Marine / Shipping	other	Railway
Special Test Certificate	 LRS	 DNVGL.COM/AF	Confirmation
Type Test Certificates/Test Report			Vibration and Shock

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

www.siemens.com/sirius/catalogs

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3UG4511-2BP20>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3UG4511-2BP20>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3UG4511-2BP20>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3UG4511-2BP20&lang=en

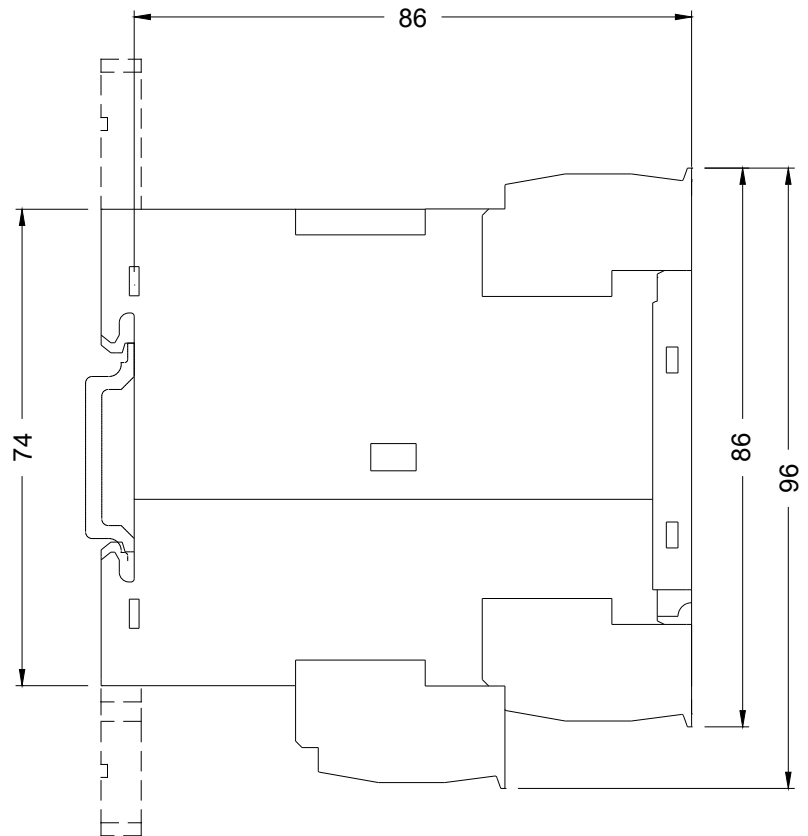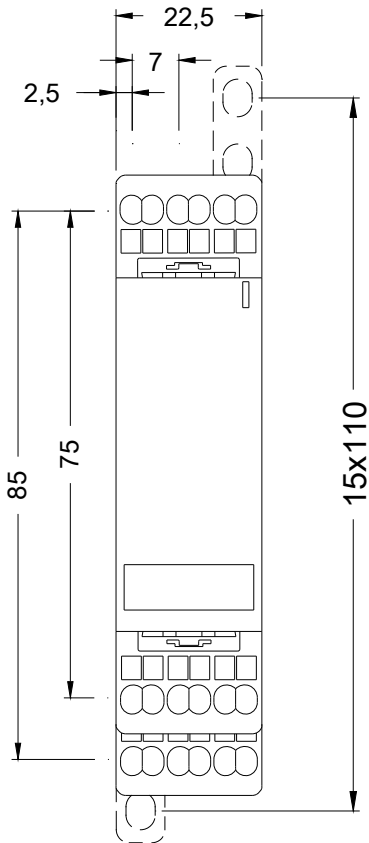

last modified:

07/26/2019