




activation & trip box TD300 incl. connecting cable 3VA - TD300 accessory for:
3VA6

Model	
product brand name	SETRON
product designation	Activation and trip box
accessories	Test device
General technical data	
mounting position	any
protection class IP	IP30
Mechanical Design	
number of circuit breakers / directly connectable	1
height	107 mm
width	76 mm
depth	25 mm
ambient temperature / during operation	
• minimum	-10 °C
• maximum	40 °C
ambient temperature / during storage	
• minimum	-40 °C
• maximum	50 °C
ambient temperature / during storage	
• minimum	-40 °C
• maximum	50 °C
Certificates	
Test Certificates	



Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9977-0MA10
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3VA9977-0MA10
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9977-0MA10
CAX-Online-Generator http://www.siemens.com/cax
Tender specifications

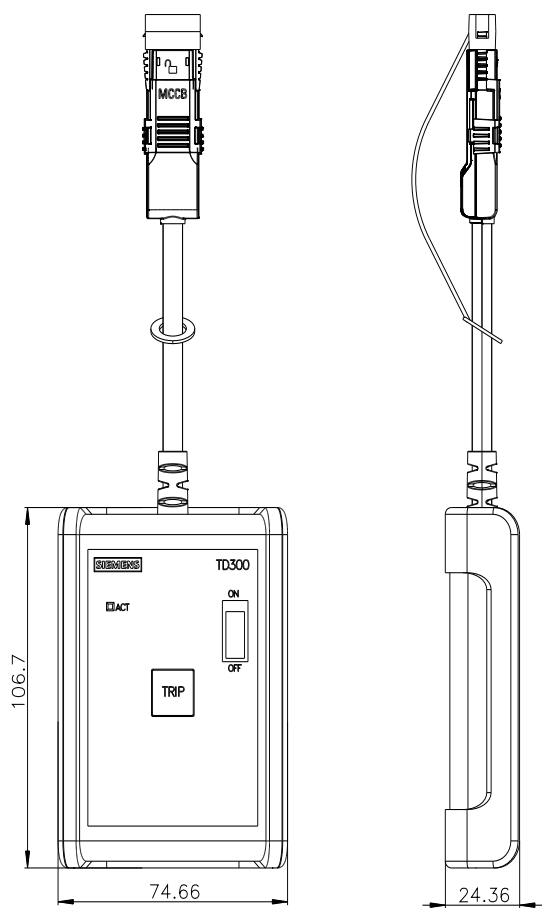

last modified:

5/26/2024

